

OPEN-FILE REPORT 82-01

COAL BED METHANE POTENTIAL OF THE PICEANCE BASIN, COLORADO

by
Carol M. Tremain

DOI: <https://doi.org/10.5878/cgs.of8201.kbun6065>



COLORADO GEOLOGICAL SURVEY
DEPARTMENT OF NATURAL RESOURCES
DENVER, COLORADO 80203

1983

REPORT DOCUMENTATION

TITLE: Coal Bed Methane Potential of the Piceance Basin, Colorado

AUTHOR: Carol M. Tremain

PERFORMING ORGANIZATION: Colorado Geological Survey
Room 715, 1313 Sherman Street
Denver, Colorado 80203

SPONSORING ORGANIZATIONS: Colorado Oil and Gas Conservation Commission
U.S. Department of Energy
(Grant No. DE-FG21-82MC19395)

REPORT DATE: August 15, 1983

REPORT NUMBER: Final

ORIGINATOR KEY WORDS: Methane, Uinta coal region, Piceance Basin,
coal mine data, oil and gas production

NUMBER OF PAGES: 49, including 21 figures, 1 table, 6 appendices,
5 plates

ACKNOWLEDGEMENTS

The author wishes to particularly thank the U.S. Department of Energy and the Colorado Oil and Gas Conservation Commission for funding this project. In addition, the Department of Energy furnished the coal analyses and the Oil and Gas Commission the geophysical logs and well records used in this study.

The U.S. Bureau of Mines provided the residual gas analyses and expert advice. The U.S. Geological Survey lab ran the gas analyses. Numerous coal mine and oil and gas companies and the U.S. Geological Survey allowed us to sample their coal cores. Our thanks to all these agencies and companies.

Special thanks are due to geologic assistants Susan Aumiller and Susan Ballenski for assistance in map and figure preparation. Finally, we must thank the supervisors and staff of the Colorado Geological Survey for all their support.

DISCLAIMER

"This material was prepared with the support of the U.S. Department of Energy, Grant No. DE-FG21-82MC19345. However, any opinions, findings, conclusions, or recommendations expressed herein are those of the author and do not necessarily reflect the views of DOE."

CONTENTS

	PAGE
Abstract.....	1
Introduction.....	1
Basin setting and structure.....	1
Stratigraphy.....	4
Coal.....	4
Resources.....	4
Depositional environment.....	8
Oil and gas.....	11
Coal bed methane.....	13
Direct evidence.....	13
1. Gassy mines.....	13
2. Gas shows in coals in oil and gas tests.....	13
3. Desorption.....	16
Projecting methane occurrence.....	16
Methane estimate.....	20
Factors affecting producibility.....	22
1. Water.....	22
2. Natural fracturing.....	22
3. Extent of reservoirs.....	22
4. Economics.....	23
5. Drilling and completion techniques.....	26
Conclusion.....	26
References Cited.....	28
Appendix 1.....	31
Appendix 2.....	35
Appendix 3.....	38
Appendix 4.....	45
Appendix 5.....	46
Appendix 6.....	48

ILLUSTRATIONS

	PAGE
1. Index map.....	2
2. Structure map.....	3
3. Stratigraphic chart.....	5
4. Cretaceous seaway.....	6
5. Mesaverde depositional environment.....	6
6. Three coal outcrops.....	7
7. Coal fields of the Piceance Basin.....	8
8. Diagrammatic E-W Mesaverde cross section.....	9
9. Shoreline trends of Mesaverde marine sandstones.....	9
10. Coal depositional environments.....	10
11. Upper Cretaceous-Early Tertiary nomenclature.....	11
12. Oil and gas fields.....	12
13. Gas in Mesaverde sandstones.....	14
14. Drillhole gas shows.....	15
15. Desorption sample location map.....	17
16. Heat flow map.....	18
17. Geothermal gradient map.....	19
18. Gas content versus rank.....	21
19. Gas generation versus rank.....	21
20. Lineation map.....	24
21. Pipeline map.....	25

TABLE

1. DST and head data.....	23
---------------------------	----

PLATES

1. Coal list map	
2. Net coal thickness map	
3. Coal rank map	
4. Type logs of Mesaverde Formation	
5. Gassy mine map	

ABSTRACT

The 4,000 square miles of the Piceance Basin contain significant coal and gas resources in Cretaceous Mesaverde coal seams. The author has mapped coals from several hundred to 12,000 feet deep. Individual beds range up to 52 feet thick with net total coal thicknesses up to 200 feet. There are approximately 250 billion tons of deeply buried (3,000 feet+) high volatile A to semi-anthracite coals containing up to 77 trillion standard cubic feet of gas. These estimates are based on the included coal isopach and rank maps, the approximately 200 desorption tests (0-765 cubic feet of gas/ton of coal), the 47 gassy mines (some producing over 1MMCFD), the numerous shows in oil and gas wells, and the 8 holes that tested anywhere from 0-440 MCFGD in the basin.

INTRODUCTION

The Uinta coal region of northwestern Colorado covers approximately 7,200 square miles as defined at the base of the Cretaceous Mesaverde Formation (Figure 1). The Piceance Basin, approximately 4,000 square miles of the Uinta coal region, has excellent potential for the development of coal bed methane, the natural gas emitted by coals as they mature.

Coal, oil, and gas have been produced in the region since the late 1800's. Throughout this period, coal miners have been troubled by the production of explosive methane along with the coal. Oil men also encountered this coal associated methane and some have concluded that in Upper Cretaceous Mesaverde sandstones "coal and carbonaceous shale furnished much of the gas" (Millison, 1968). This report was written under a U.S. Department of Energy grant to better determine the extent of this coal bed methane hazard/resource. The basin structure, stratigraphy, coal and oil and gas resources are briefly described to give the setting of the coal bed methane occurrence here.

BASIN SETTING AND STRUCTURE

The Piceance Basin, a part of the Colorado Plateau physiographic province, forms a high plateau lying 5,000 to 8,000 feet above sea level. It is drained and dissected by the westward-flowing Colorado, Yampa, White, and Gunnison Rivers. The basin is bounded by: the Axial Basin uplift in the north, the Grand Hogback Monocline in the east, the Elk and West Elk Mountains and the Gunnison Uplift in the south, the Uncompahgre Uplift in the southwest, and the Douglas Creek Arch in the west.

This Laramide basin is assymetric in shape with a steeply dipping eastern flank and a gentle western flank. The northwest trending axis of the basin parallels Grand Hogback Monocline. Northwest-southeast trending anticlines cross the interior of the basin (Figure 2).

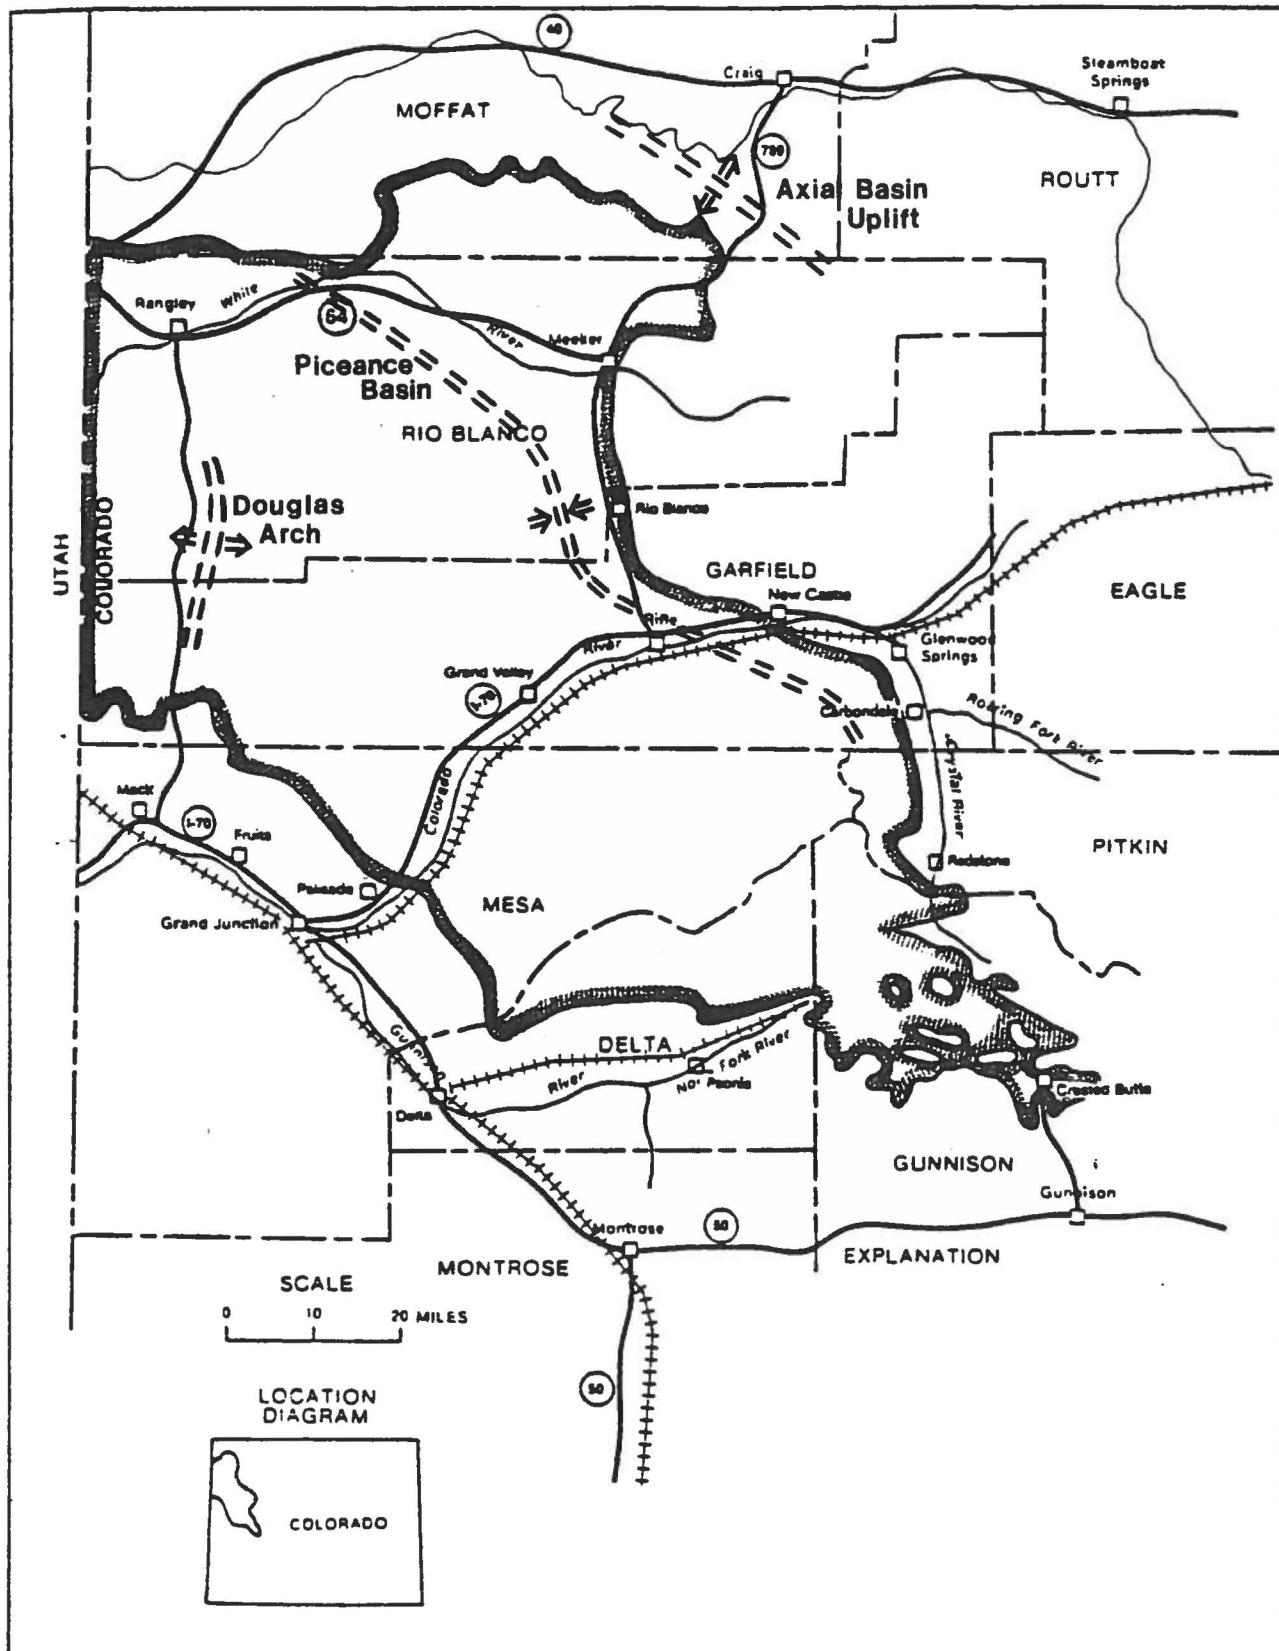


Figure 1. Index map of the Uinta coal region, northwest Colorado (after Ameri et al., 1981).

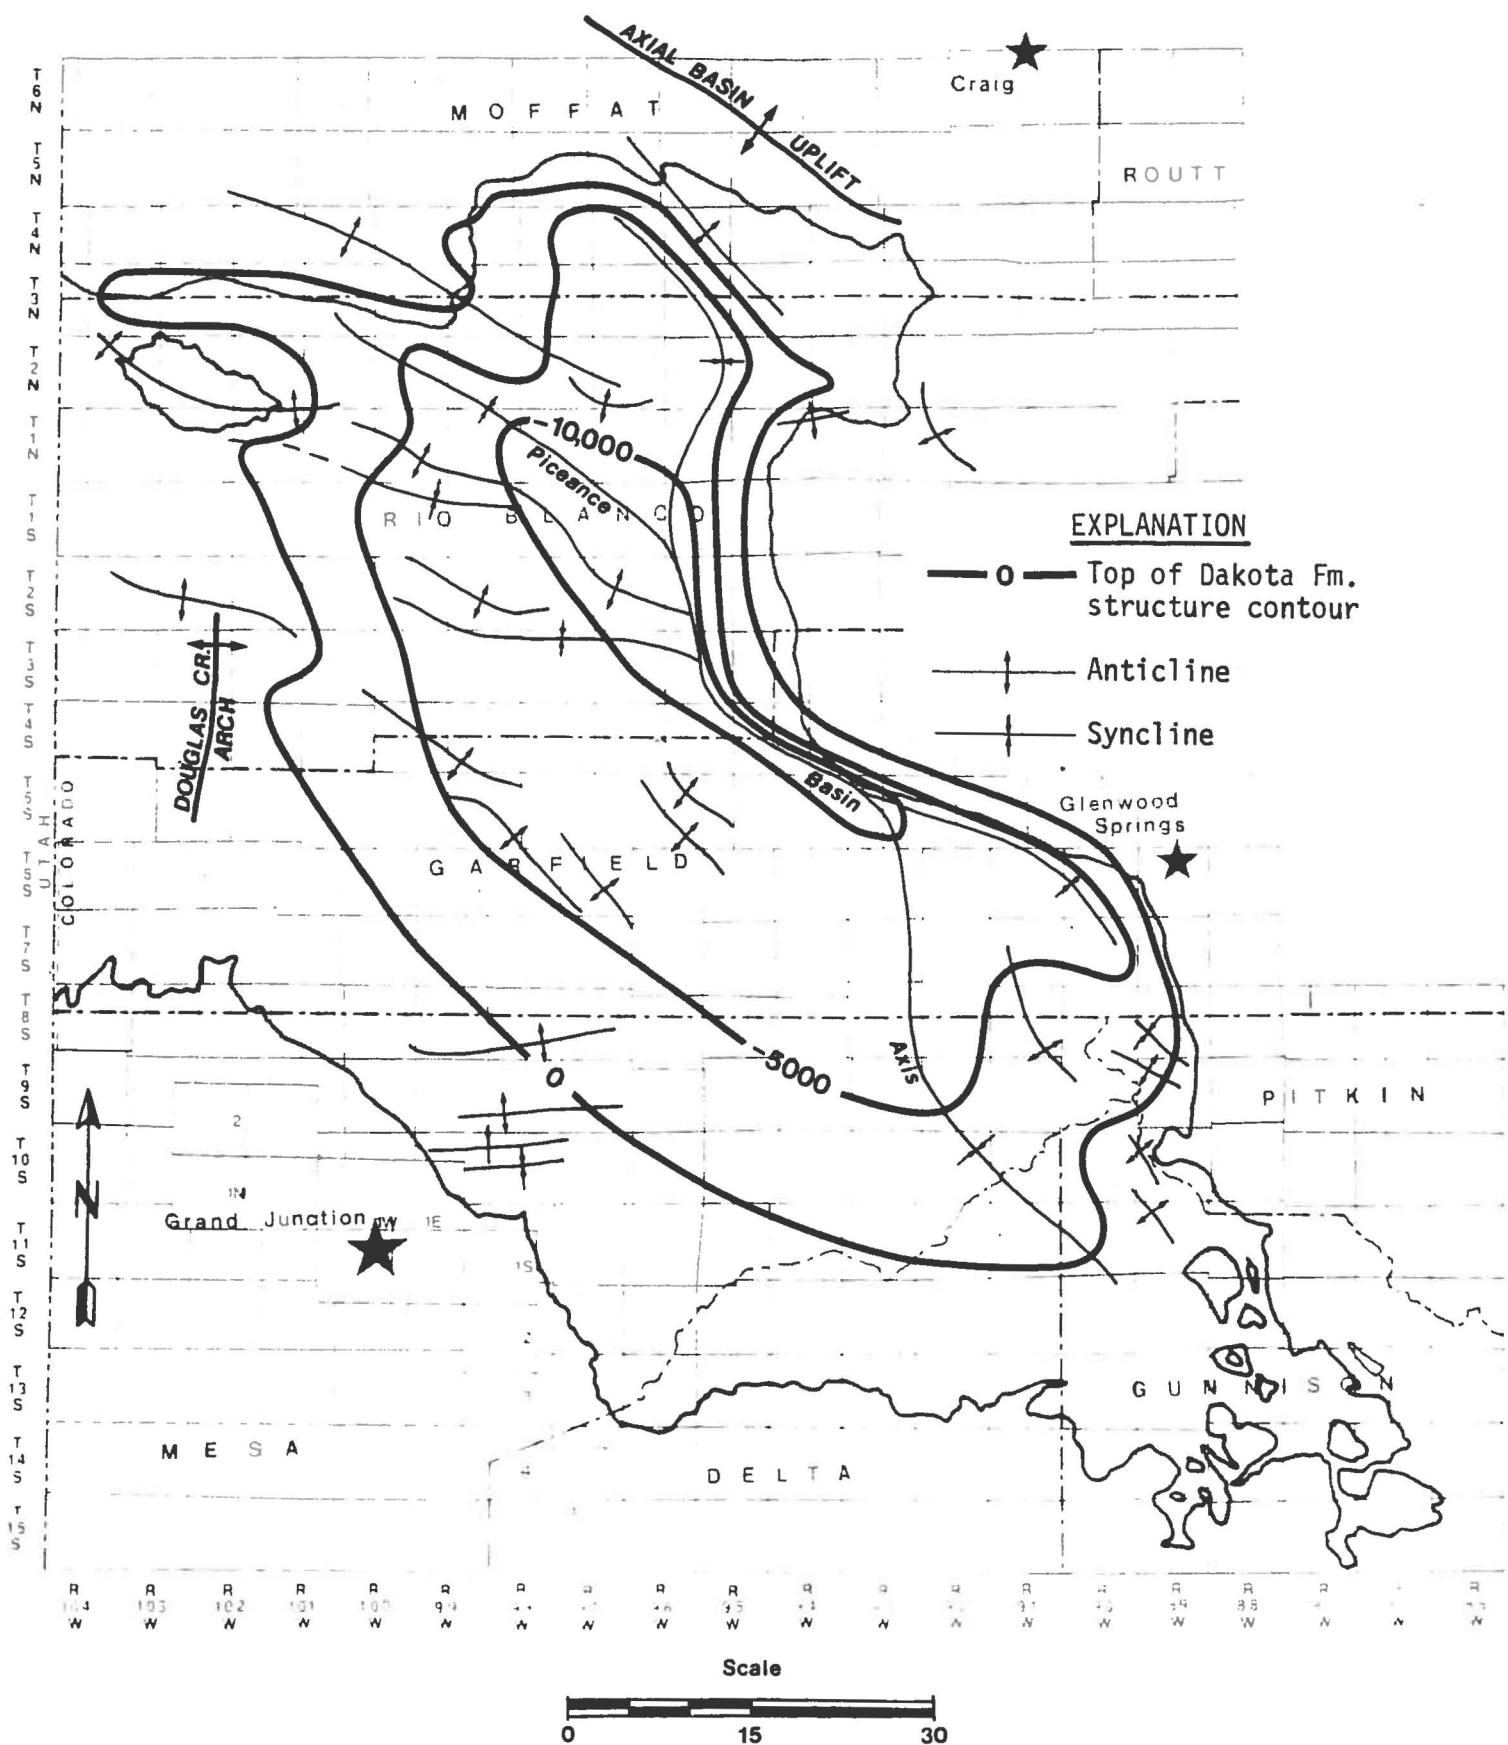


Figure 2. Tectonic map of the Piceance Basin.

STRATIGRAPHY

The Precambrian basement is 18,000 feet below sea level at the deepest point of the basin. There are over 25,000 feet of Cambrian through Quaternary sediments at this point (Murray, 1980). Most of these sediments are not coal bearing and hence are not described in this paper. The stratigraphic chart, Figure 3, shows these formations and their correlative formations in other areas of the state.

The Cretaceous sediments contain the coal bearing formations in the Piceance. There are 6,000 to 11,000 feet of marine and non-marine sediments in the Cretaceous. These sediments were deposited in a 1,000-mile-wide sedimentary basin that stretched from the Gulf of Mexico to the Arctic as shown in Figure 4. The major formations of the Cretaceous are the Lower Cretaceous Dakota Formation, the Upper Cretaceous Mancos, and the Upper Cretaceous Mesaverde Formations.

The Dakota Formation consists of several hundred feet of marginal marine, fluvial, and paludal sediments deposited on the edge of the Cretaceous epicontinental sea. The formation is found throughout the state. It gets younger to the west and the south since the sea transgressed from northeastern Colorado all the way into Utah. The Dakota is coal bearing in the San Juan Basin in the southern part of Colorado and could possibly contain coal in the Piceance Basin.

The Dakota Formation is overlain by 4,000 to 7,000 feet of gray to black marine Mancos shale deposited while the coastline of the epicontinental sea was still in Utah. The Mancos thins up to 800 feet over the Douglas Creek on the west side of the basin (Quigley, 1965) signalling the start of the Laramide orogeny.

As the Laramide orogeny progressed, the Mancos sea retreated to the east across Colorado. Childs (1980) estimates 4,600 to 6,500 feet of fluvial to marginal marine Mesaverde sediments were deposited on the western margin of the retreating sea as part of a south-southeastward prograding delta complex (Collins, 1976). The source of most of the Mesaverde sediments was an uplift in Utah, as shown in Figure 5. The Mesaverde is the major coal (and coal bed methane) bearing formation in the Piceance.


COAL

Resources

Mesaverde coal occurs throughout the basin from the surface to 12,000 feet deep in beds up to 52 feet thick (see Plate 1). Net coal thicknesses of beds three feet or greater exceed 200 feet in the northeast corner of the basin (see Plate 2). Figure 6 shows three prominent outcrops of these coal beds along the east side of the basin.

Coal rank ranges from subbituminous C in the northeast where the coal was not deeply buried to anthracite in the southeast where the coal was upgraded by neighboring intrusions (see Plate 3). However, most of the coal is in the high volatile B to low volatile range.

COLORADO STRATIGRAPHIC NOMENCLATURE CHART

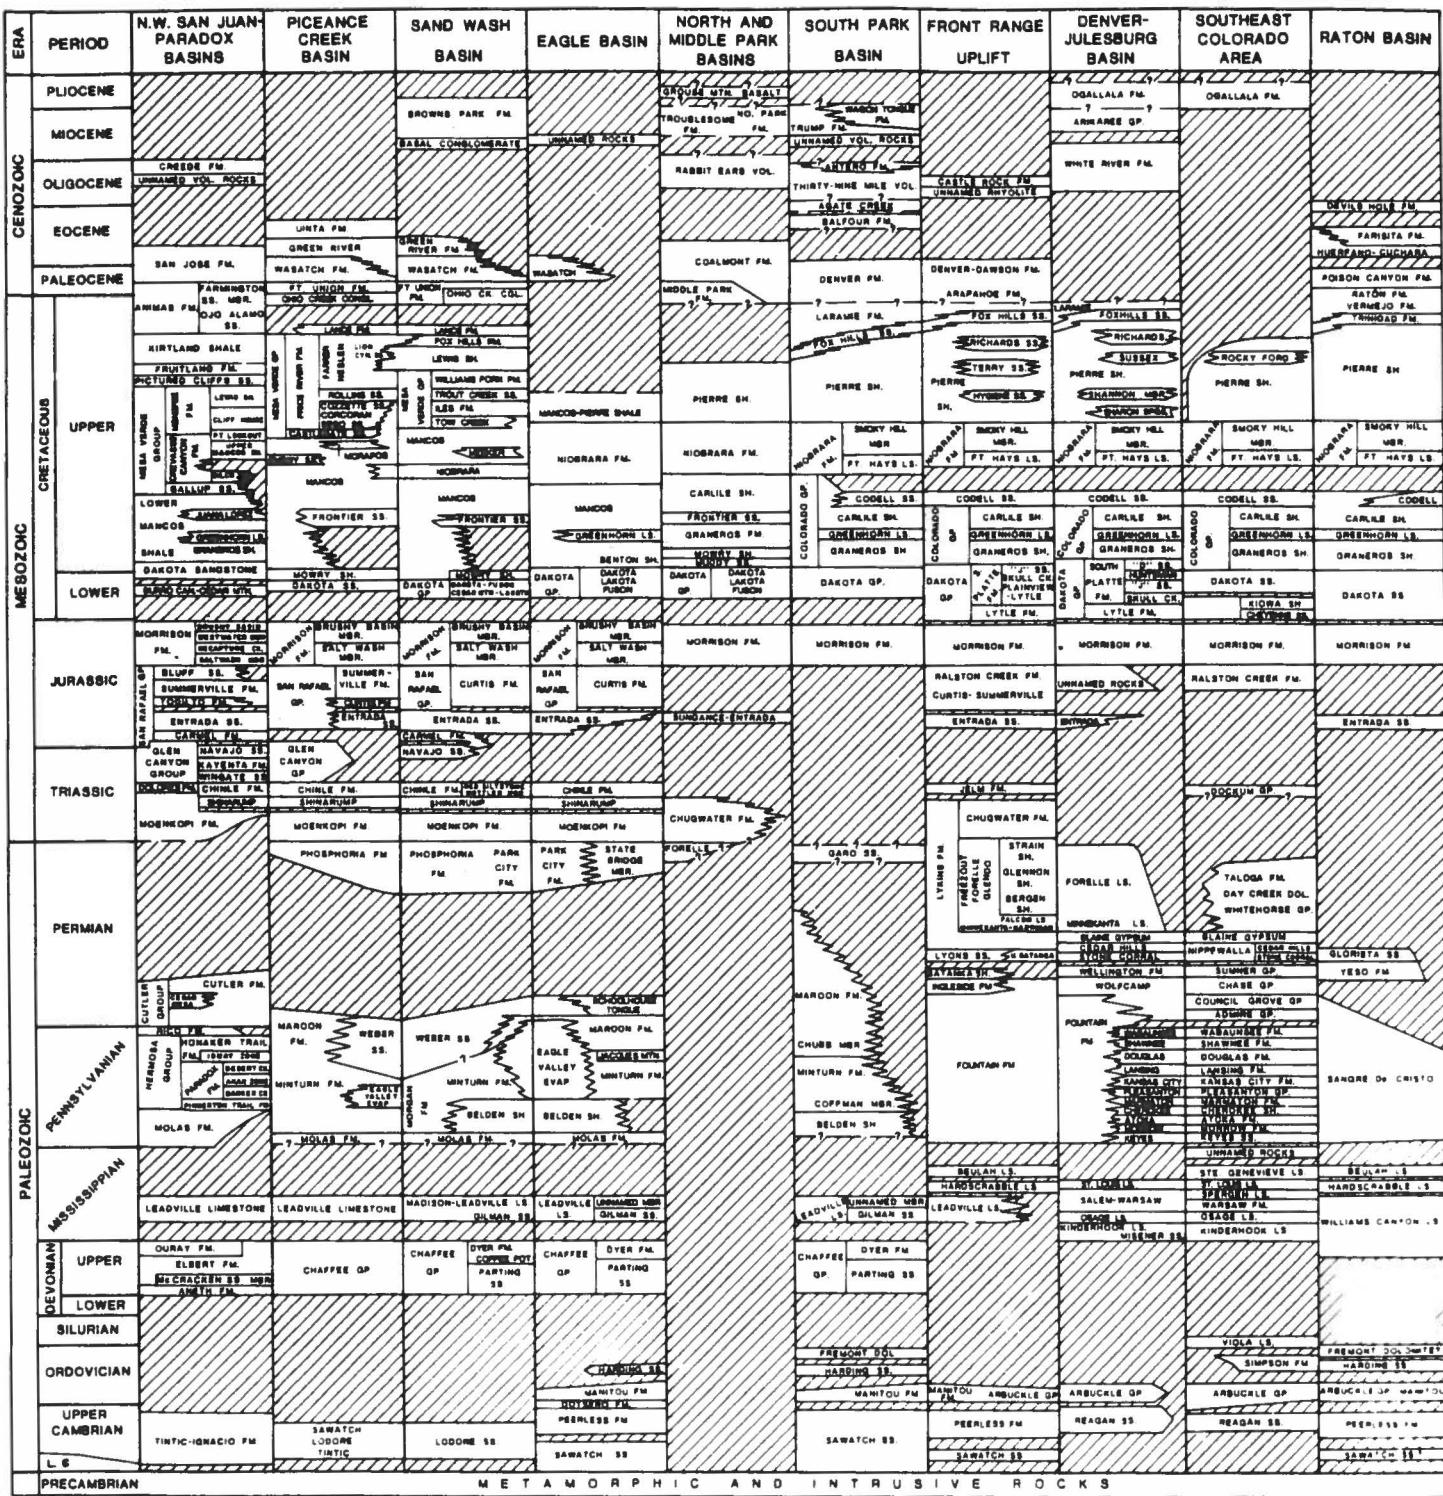

COMPILED BY RICHARD H. PEARL,
COLORADO GEOLOGICAL SURVEY

SOURCE OF DATA: CROSS SECTIONS, ATLAS OF THE ROCKY MOUNTAIN REGION (RMAG, 1972) AND OTHER PUBLICATIONS FROM ROCKY MOUNTAIN ASSOCIATION OF GEOLOGISTS SPECIAL PUBLICATION NO. 2, 1977, FIGURE 2, AND INFORMATION

Figure 3. Colorado stratigraphic nomenclature chart.

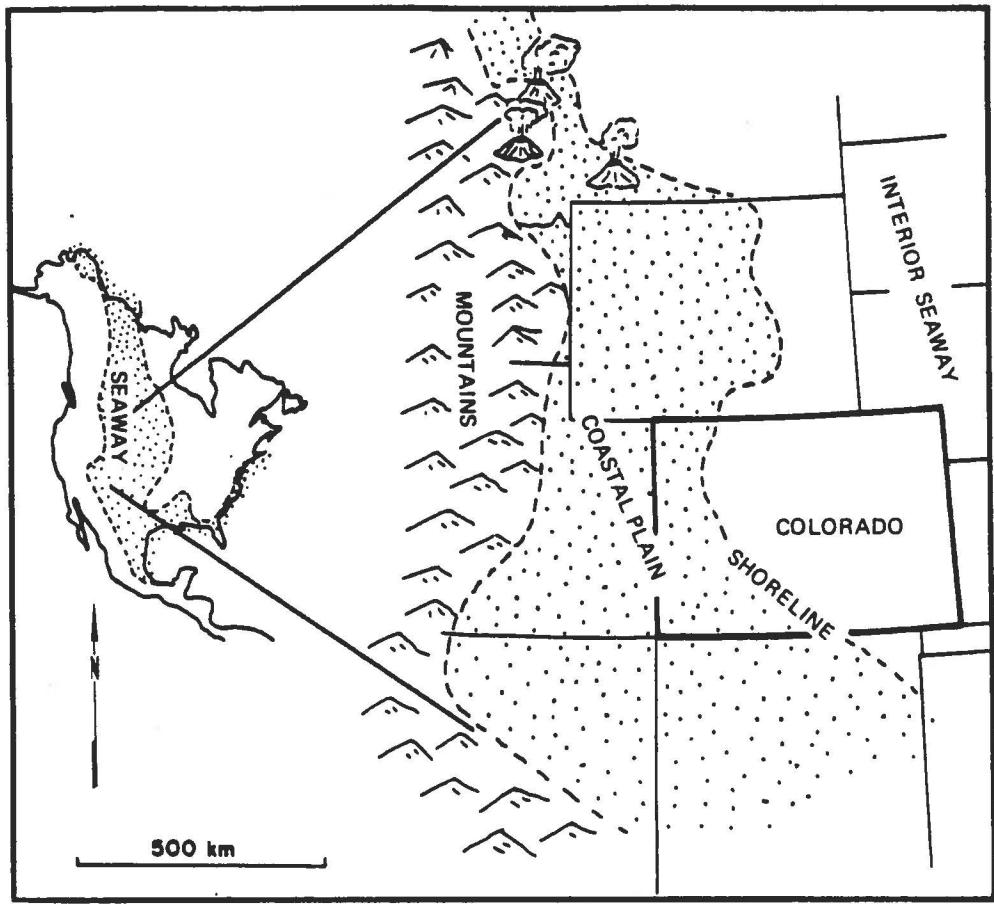


Figure 4. The Cretaceous epeiric seaway (after Lorenz, 1982).



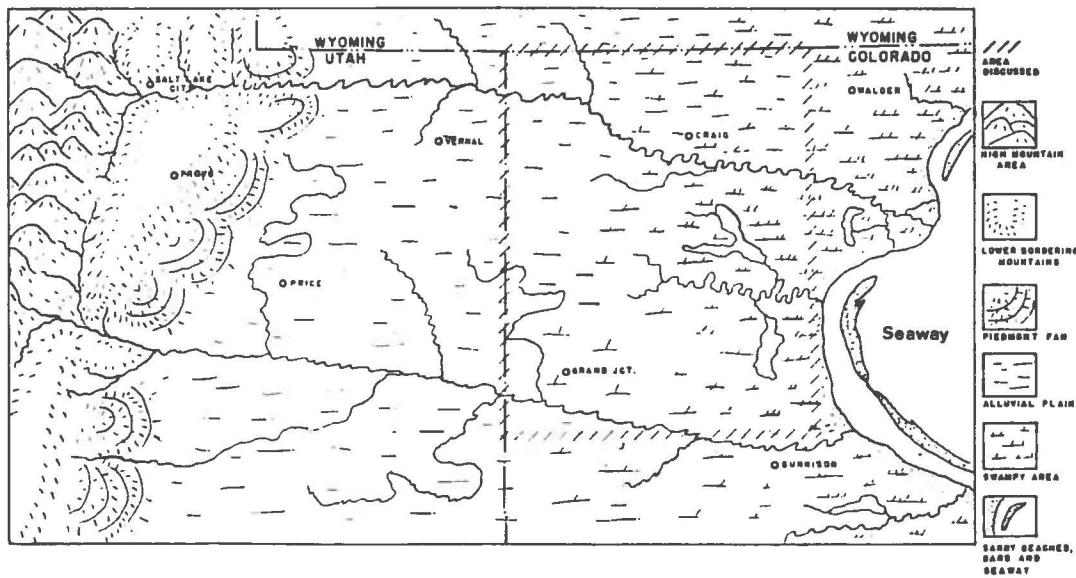



Figure 5. Cretaceous paleogeography during the deposition of Mesaverde sediments (from Curtis, 1962).

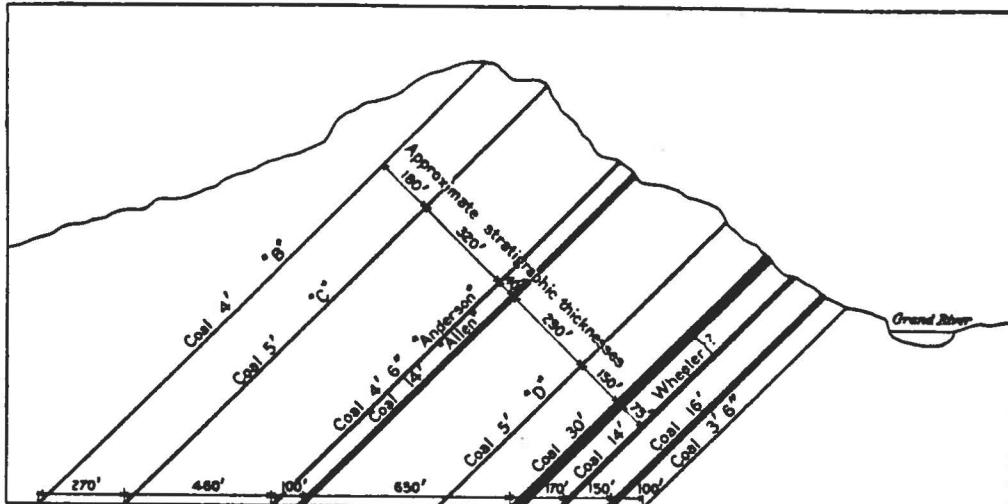

South Canyon

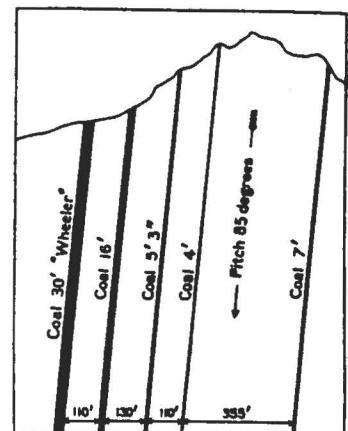

Rifle Gap

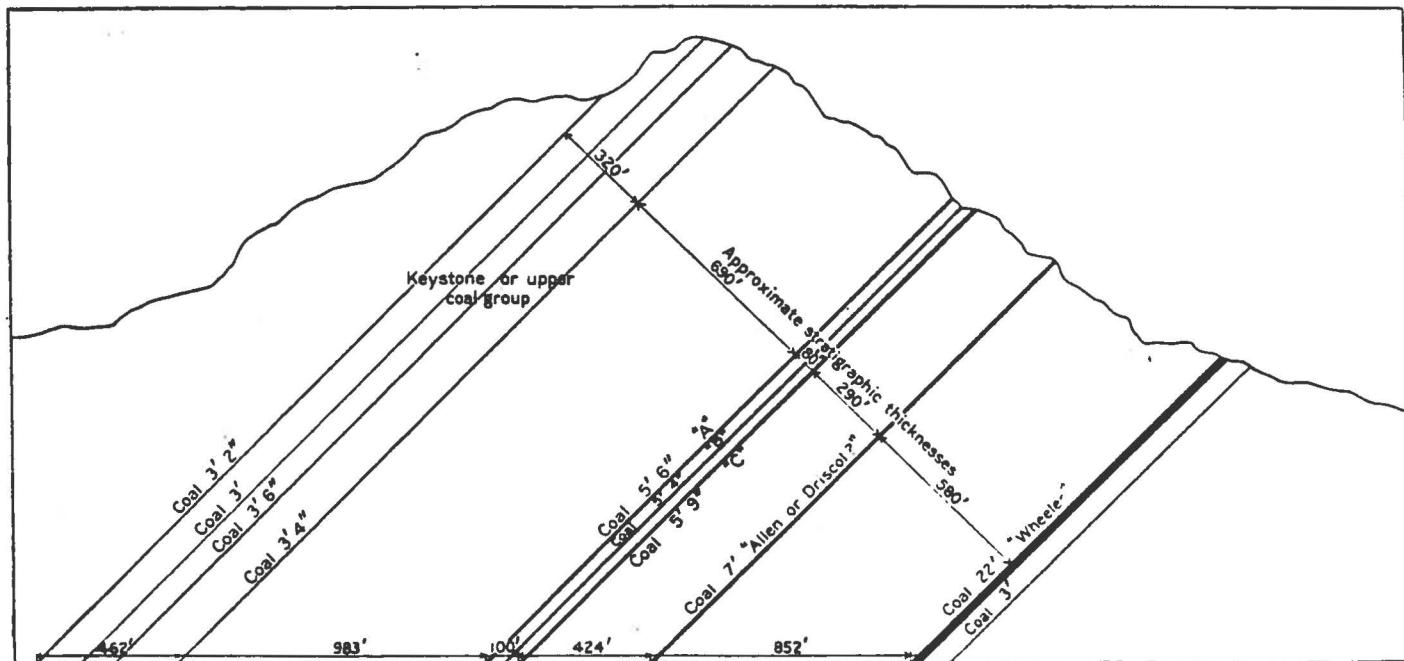

Newcastle

Figure 6. Three coal outcrop profiles along the Grand Hogback, eastern edge of the Piceance Basin (from Gale, 1910).

This coal forms 26 percent of the state's total coal resources (Murray, 1980). Coal is mined from 8 coal fields around the margin of the basin (Figure 7), and the Piceance Basin leads the state in production of underground and coking coal. Since the late 1800's, the basin has produced more than 91.5 million short tons (approximately 15% of Colorado's total production) from 300 mines.

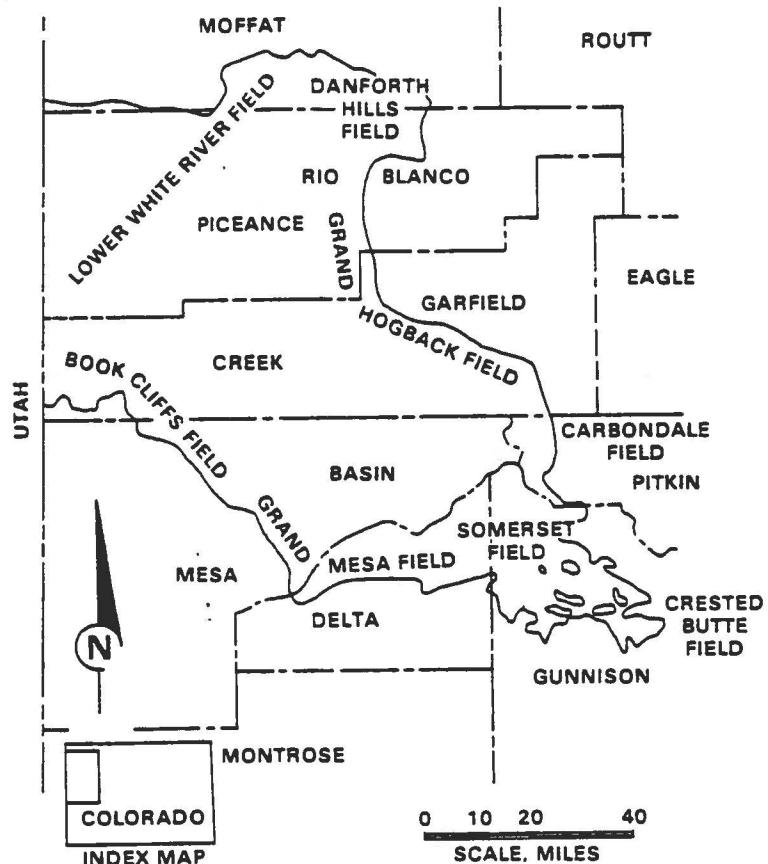


Figure 7. Coal fields of the Uinta coal region, Colorado (from Childs, 1980).

Depositional Environment

The lowermost part of the Mesaverde group is a transitional zone of blanket regressive marine to beach sandstones that intertongue with the Mancos Shale (Figure 8). The seaward limits of some of the more widespread sandstones, such as the Cozzette, the Corcoran, and the Sego, are shown in Figure 9. On the northern and western side of the Basin, inland from their seaward limits, these sandstones are often accompanied by minable coal beds.

However, the one coal sequence found throughout the entire Piceance Basin occurs in the approximately 1,000 feet above the Rollins-Trout Creek Sandstone, the youngest basinwide regressive sandstone. This sequence consists of mixed sandstone, shale and coal. According to a study by Collins in the southeastern part of the basin, (1976) the coals closest to the Rollins were probably deposited in brackish interdistributary marshes and formed from the remains of grasses and reeds. Coals higher in the

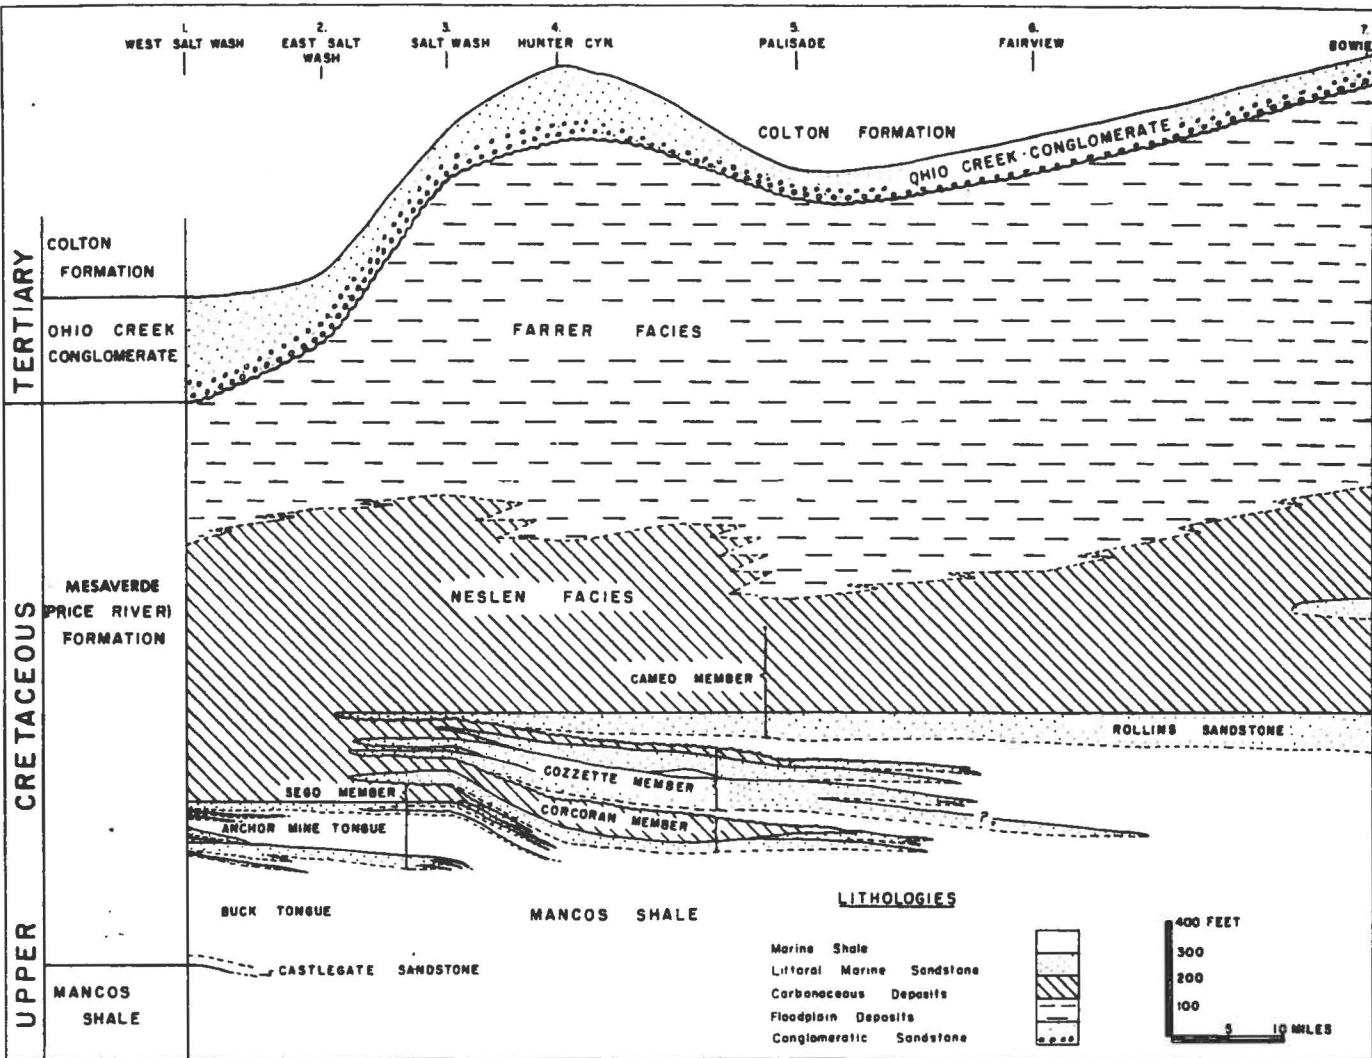


Figure 8. Late Cretaceous deposits of the southern Uinta coal region, Colorado (from Young, 1959).

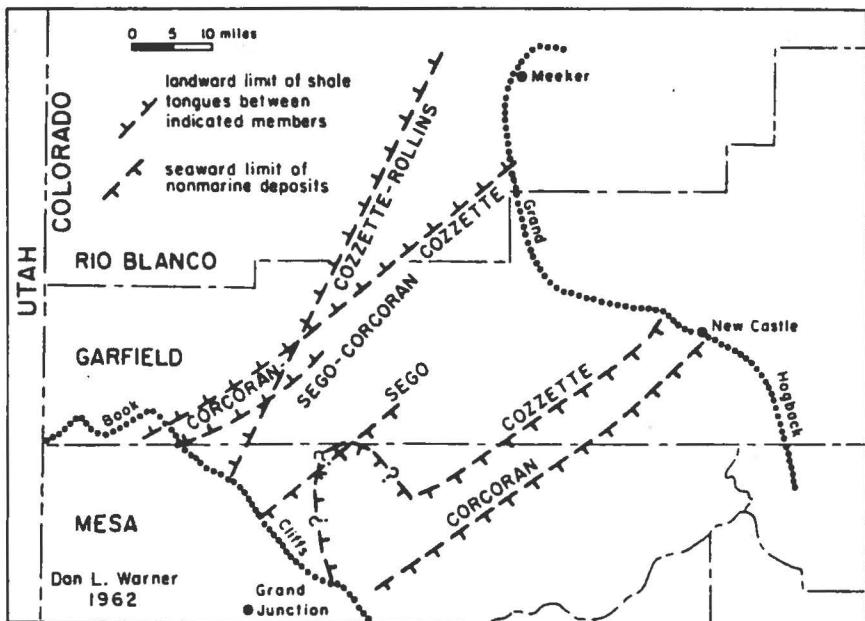


Figure 9. Shoreline trends of some lower Mesaverde regressive sandstones (from Warner, 1964).

section were deposited further back in the delta in forested fresh water swamps. Channel and crevasse splay sandstones and mudstones split the coals. In the CER-MWX 1 and 2 wells of Section 34, Township 6 South, Range 94 West, only 63% of these sandstones are continuous for a distance of 139 feet (CER, 1982); however, all the coals (3 feet or thicker) are continuous over that distance. Unfortunately, correlations by the author in different parts of the basin indicate that even the thickest coals (30 to 50 feet) rarely maintain their thickness for more than a couple of square miles. Figure 10 illustrates the depositional environment of this widespread coal sequence.

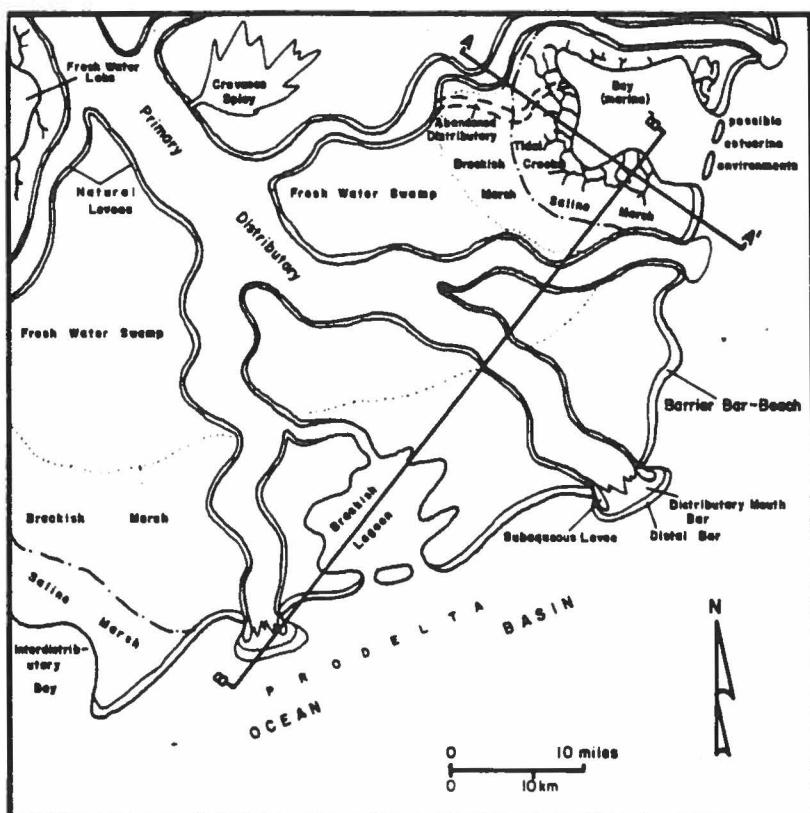


Figure 10. Depositional environment of Mesaverde coals (from Collins, 1976).

Overlying the coal bearing zone of the Mesaverde are several thousand feet of fluvial sandstones and shales essentially barren of coals. Due to the vast extent of the basin, and the varying facies of the Mesaverde Group there, the group has been split into a number of formations, members, and facies. Figure 11 gives this nomenclature. Plate 4 contains three type logs showing the appearance of the Mesaverde Formation in different parts of the basin.

N	S	N	S	N&S	S	N	S	N
Gale (1910) Axial – New Castle	Lee (1909, 1912) Hanks (1962) & Collins (1970). Cameo-Somerset Coal Basin	Hancock (1925) Axial Eby (1930) Meeker	Johnson (1948) Somerset	Young (1955, 1966) Cameo	Warner (1964) White River-Thompson Creek		This Report	
Wasatch Formation	Wasatch Formation	Wasatch Formation	Wasatch Formation	Wasatch Formation	south	north	Wasatch Formation	
Wasatch Formation	Ohio Creek Conglomerate	Wasatch Formation	Ohio Creek Conglomerate		not studied	not studied	Ohio Creek Conglomerate	
upper Mesaverde	upper Mesaverde undifferentiated	Williams Fork Formation	barren member	Farrar Facies	Mesaverde Formation	Williams Fork Formation	upper Mesaverde undifferentiated	Williams Fork Formation
"white rock"	Paonia Shale Member	Trout Cr. Sandst.	upper coal member	Neslen Facies			Paonia Shale Member	
	Bowie Shale Member		lower coal member	Cameo Sandstone	Rollins Sandstone	Trout Cr. Sandstone	Bowie Shale Member	
	Rollins Sandstone		Rollins Sandstone		Mancos Shale	Iles Formation	Rollins-Trout Creek Sandstone	
Lower Mesaverde	Iles Formation			Cozzette Sandstone	Cozzette Sandstone		Cozzette Sandstone	
"rim rock"	"rim rock"				Corcoran Sandstone		Corcoran Sandstone	
Mancos Shale	Mancos Shale			Mancos Shale	Mancos Shale		Mancos Shale	
							Sego Sandstone	
							Sego Sandstone	

Figure 11. Nomenclature for Upper Cretaceous and early Tertiary rocks in the Piceance Basin (from Collins, 1976).

OIL AND GAS

In addition to coal, oil and gas are significant fossil fuels found in the Basin. The first well was drilled in the Piceance Basin in 1890. However, the first important gas discovery did not occur until 1930. Most of the oil and gas is found in structural, stratigraphic or hydrodynamic traps. Oil and gas is produced from the Pennsylvanian Weber to the Eocene Green River Formations; producing formations and fields are listed in Appendix 1. However, as can be seen from the oil and gas field map (Figure 12), natural gas, most of it stratigraphically trapped, forms the principal production of the basin.

In fact, only gas is produced from the dominantly non-marine Mesaverde Formation. Gas is found in both the fluvial-paludal and the lower transitional facies of the Mesaverde Formation (see map of DST & perforation recoveries from the Mesaverde Group, Nuncio & Johnson, 1981). Most of the established reservoirs are in the lower transitional facies in such marine sandstones as the Cozzette and Corcoran. However, "the non-marine facies probably contains much more gas in place than does the lower facies" (Dunn, 1974). Much of this gas has not been produced because the sandstone reservoirs of this non-marine facies are clay filled or tightly cemented. The CER-MWX wells mentioned earlier in this report are part of a U.S. Dept. of Energy experiment to develop the technology to economically complete wells in these tight, non-marine sandstones.

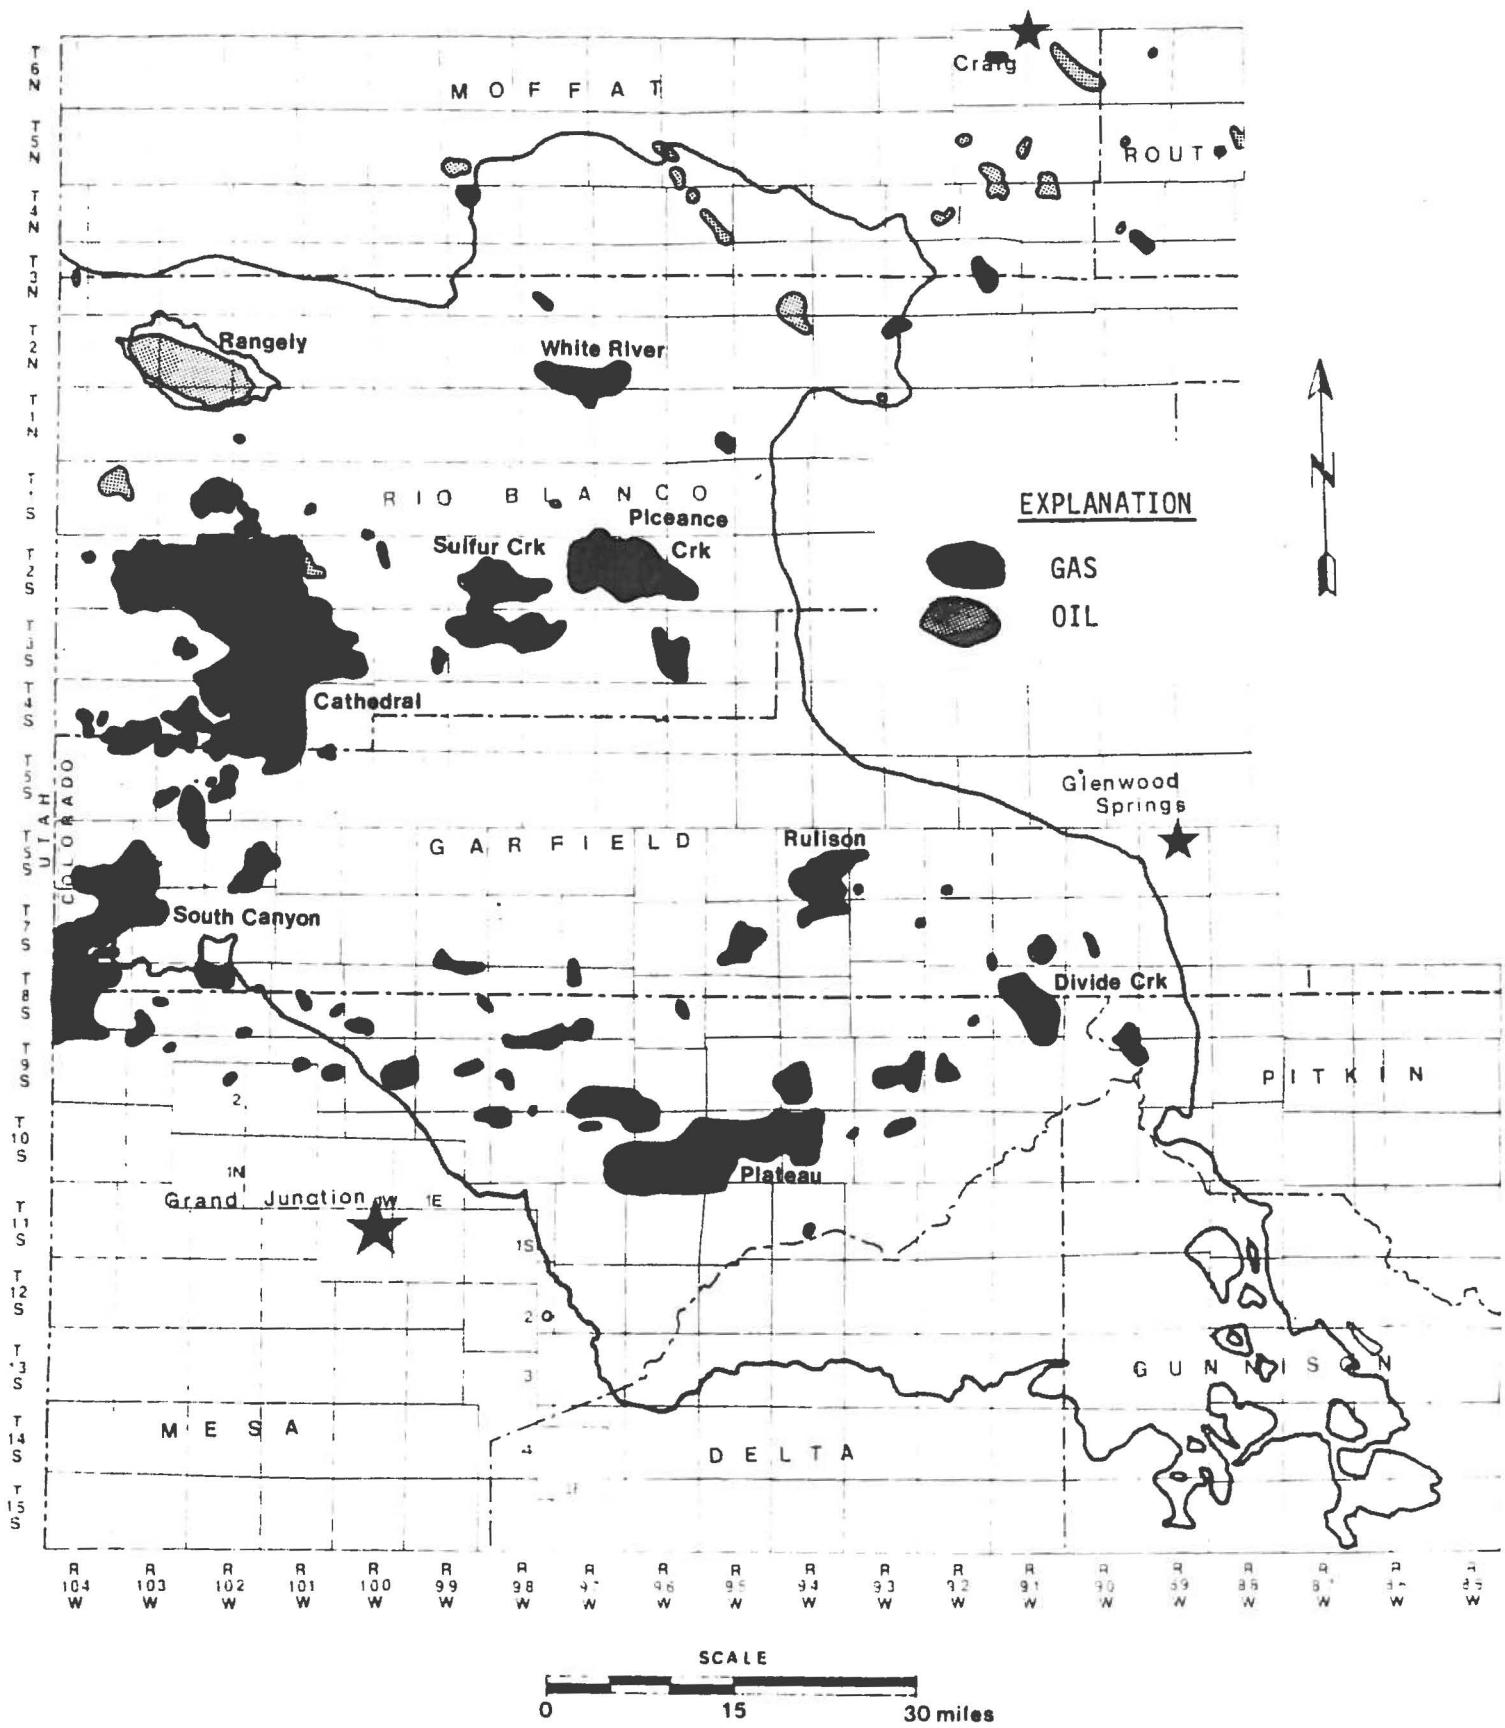


Figure 12. Oil and gas fields of the Peceance Basin area (after Scanlon, 1983).

Numerous authors (Millison, 1968; MacMillan, 1980; Sanborn, 1977) have suggested that the gas in the non-marine section of the Mesaverde is probably generated by the coals and trapped in sandstones as shown in Figure 13. Rice (personal communication), after analyzing Mesaverde gas samples from the CER-MWX wells both chemically and isotopically, concluded that the gas from the paludal zone seemed to come from the coals.

COAL BED METHANE

Direct Evidence

In addition to the coal generated gas trapped in Mesaverde sandstones, there is direct evidence of the existence and possible producibility of coal generated gas still in the coals. This evidence consists of: 1) gas producing coal mines; 2) gas shows in coals in oil and gas exploration holes, and 3) desorption data.

1. Gassy Mines

Fender and Murray (1978) listed 47 coal mines in the region that had reported gas occurrences including twelve gas explosions, five dust explosions (possibly methane related), and six mine fires. These gas occurrences are shown on the map (Plate 5) and listed in Appendix 2. More recently, a gas explosion killed fifteen miners in a Carbondale field mine.

Indeed, the most gassy mines are in the Carbondale field (T7-10S, R89W) where the coal ranks medium volatile. In this field, the L. S. Wood Mine emitted 2,170 MCFGD (million cubic feet of gas a day), the Dutch Creek No. 1 Mine emitted 1,338 MCFGD, and the Dutch Creek No. 2 Mine emitted 1,426 MCFGD for the period 1974 through 1976 (Tremain et al, 1981).

Mid-Continent is currently draining methane from gob areas in two of these mines and using it to dry their coal (see Choate, et al, 1981). Furthermore, a methane drainage plan has been drawn up for a mine in the Somerset field (see Boreck and Streever, 1980).

2. Gas Shows in Coals in Oil and Gas Tests

In addition to the gassy mines around the basin margin, are gas shows in coal beds in oil and gas drill holes scattered throughout the interior of the basin. Appendix 3 details these shows and Figure 14 gives their locations. This data can be summarized as follows:

- 1) 21 holes with gas in drilling mud while coals were being drilled
- 2) 15 holes with production tests of sandstones in paludal zones of the Mesaverde Formation
- 3) 15 holes with drill stem tests of intervals containing at least one coal bed
- 4) 6 holes with production tests in which both sandstones and coals were perforated
- 5) At least 8 holes where coals were individually production tested

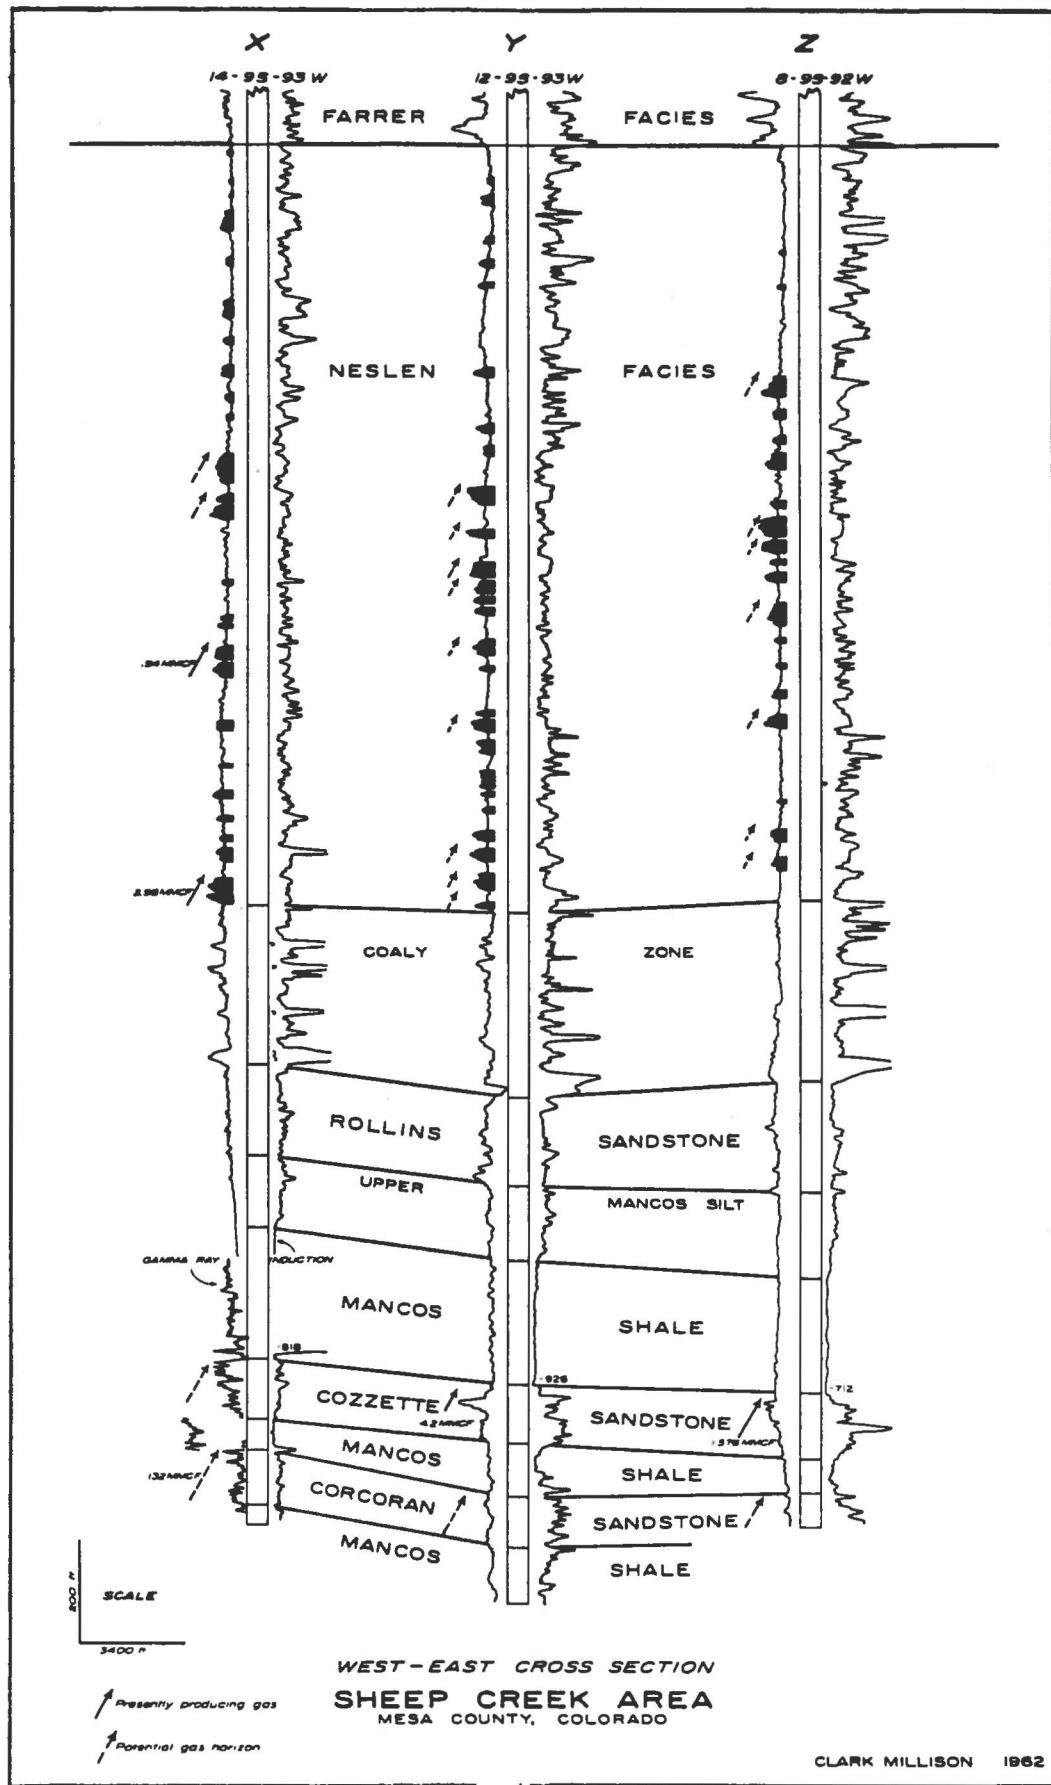


Figure 13. Gas, probably from coal seams, trapped in lower Mesaverde sandstones (from Millison, 1962).

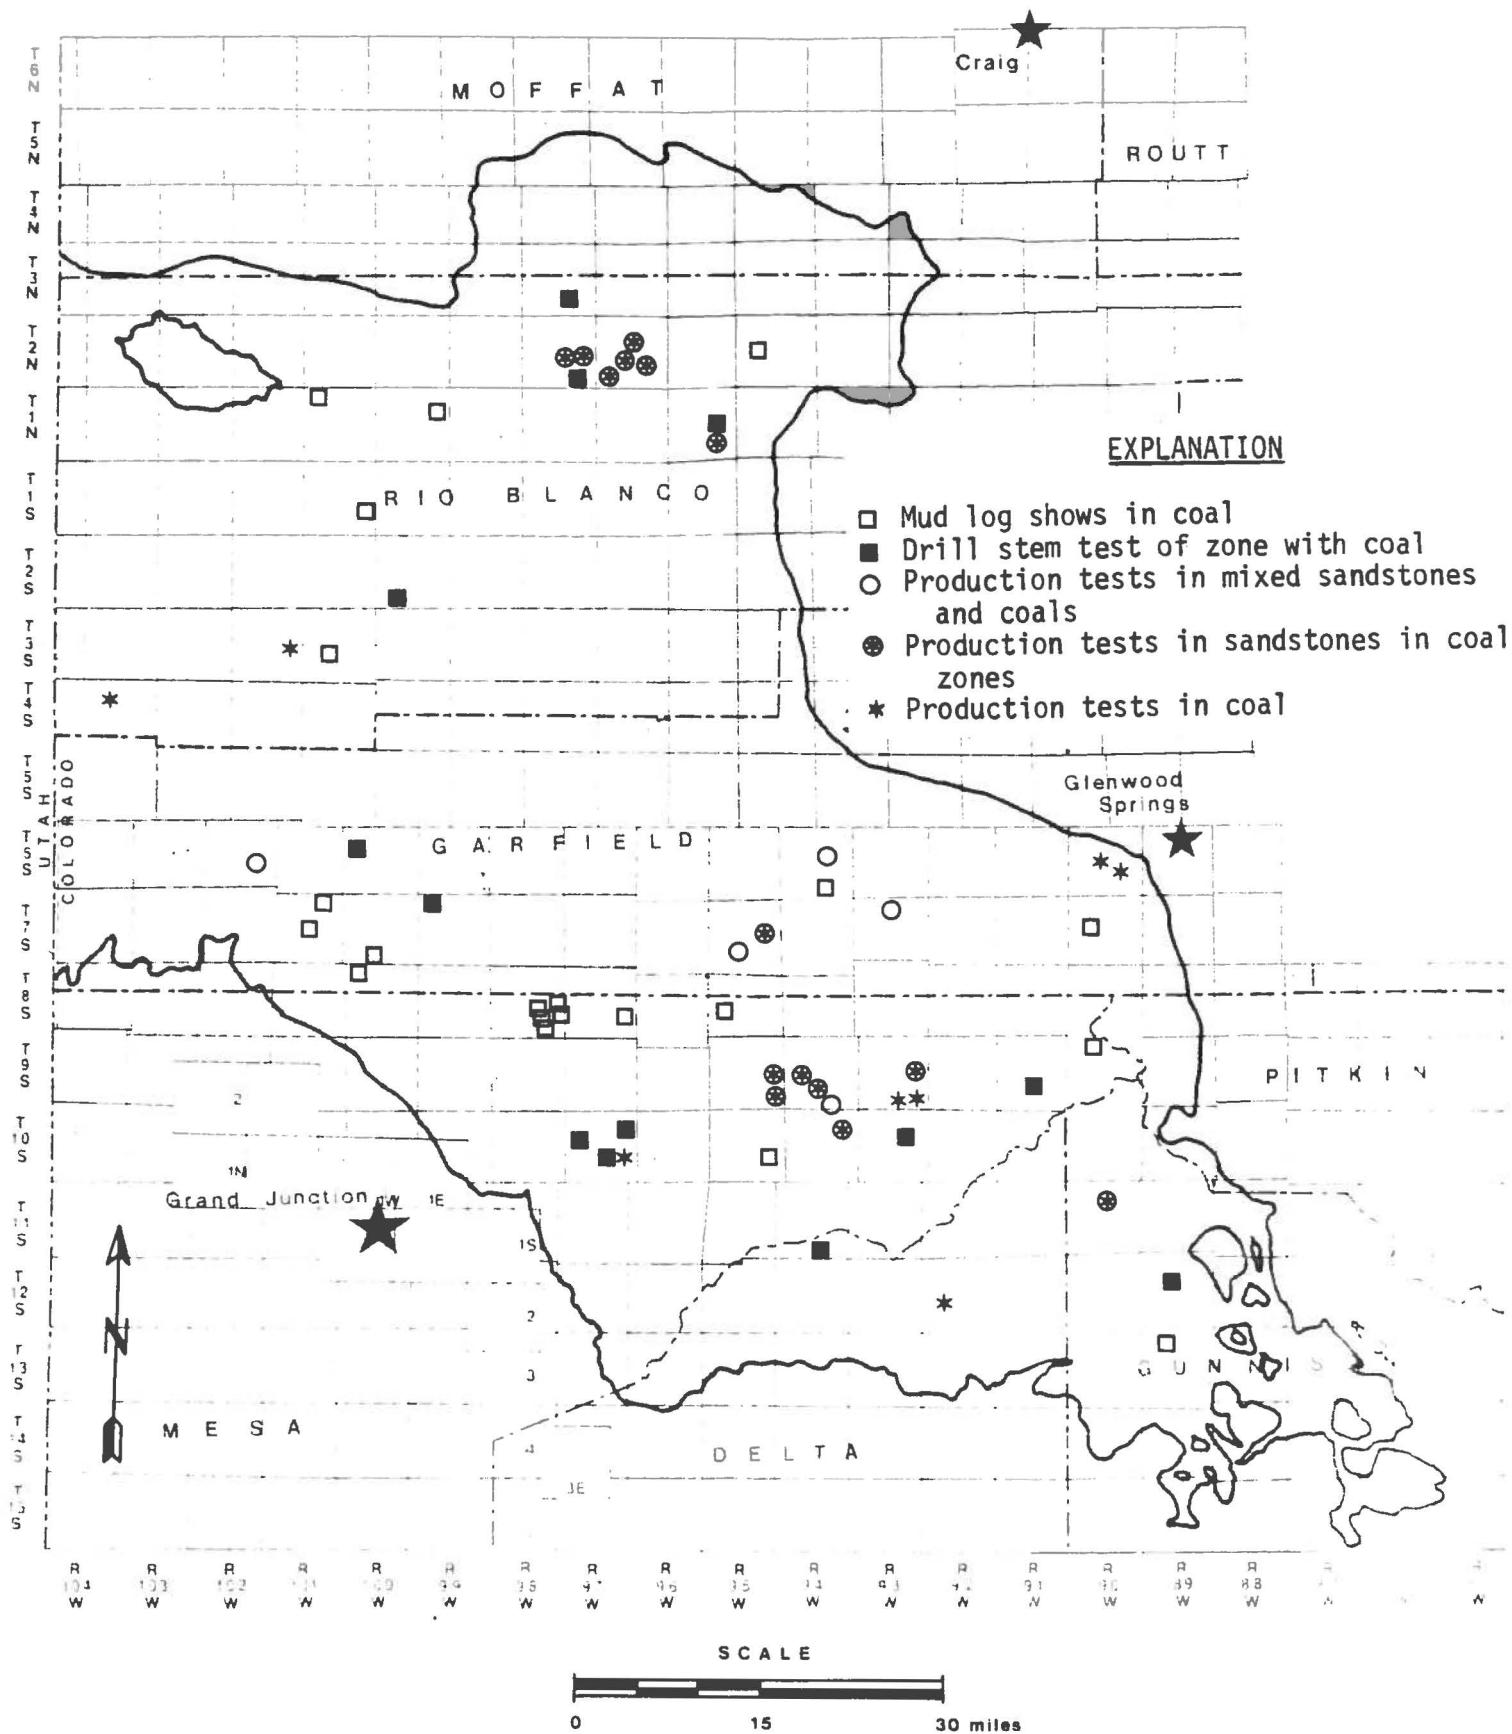


Figure 14. Shows in oil and gas wells in the Piceance Basin area.

Gas shows in mud during the drilling of coals indicate gas presence but are not quantifiable. These shows are scattered throughout the basin, even in areas where directly measured coal gas contents are only moderate. Nor can wells completed in paludal Mesaverde sandstones which were probably sourced by coal beds give valid potentials for methane production from the coal beds themselves. The same problem exists for holes drill stem tested or production tested in zones containing both coal and sandstones.

The only true indicator of coal reservoir potential comes from the 8 holes in which coals were production tested. Of these 8 holes, the first 2 holes listed in Appendix 3, Section 5, were probably tested in coals of low gas content. Of the other holes listed, the 5 for which test data are available and which produced anywhere from "small quantities" to "440 MCFGPD" may not have been completed in the manner most conducive to sustained gas production or may have been completed in coals of very high water saturation. Although no economic successes are listed in this section, testing has not necessarily been completed on all the holes, and successful production may yet result.

3. Desorption

Desorption, or measuring the gas emitted by encapsulated coal core samples, is currently our best attempt at quantifying the coal gas content of a particular coal bed. For a description of the U.S. Bureau of Mine's desorption method, see Appendix 4. Appendix 5 is a table containing desorption gas content data for 107 samples desorbed by the Colorado Geological Survey, and 92 samples desorbed by TRW Inc., the U.S. Bureau of Mines, and U.S. Steel. The locations of these samples are shown in Figure 15. Total gas contents of all but the 44 U.S. Steel samples range from 0 to 438 cf/ton (cubic feet of gas per ton of coal). U.S. Steel, using a modified Bureau of Mines method, has gas contents ranging from 250 to 765 cf/ton. (These figures are averages of several samples.)

It must be noted that the gas contents in Appendix 5 are not in standard cubic feet per ton. For the Colorado Geological Survey samples, standard cubic feet per ton numbers are approximately 20 per cent lower than the totals listed.

The general conclusions that can be drawn from this desorption data are: higher rank coals have higher gas contents, coals with less than 1,000 feet of cover, regardless of rank, have low gas contents, and the southeast section of the basin has the highest measured gas contents.

Projecting Methane Occurrence

On the basis of these general conclusions, associating high rank coals under sufficient overburden with high gas contents, we can project methane contents for areas of the basin that have no direct data. To make this projection, we need a coal rank map and an overburden map.

Plate 4 is a coal rank map of the Piceance Basin. In general, rank increases with depth of overburden on top of the coal according to Hilt's law. This pattern can be seen in the Piceance with the highest rank coal overlying the basin's axis. However, there are anomalous high rank coals in the southeastern portion of the Piceance Basin. As can be seen from Figures 16 and 17, this is also an area of high heat flow and high geothermal gradient. This high heat flow could have accelerated coalification locally.

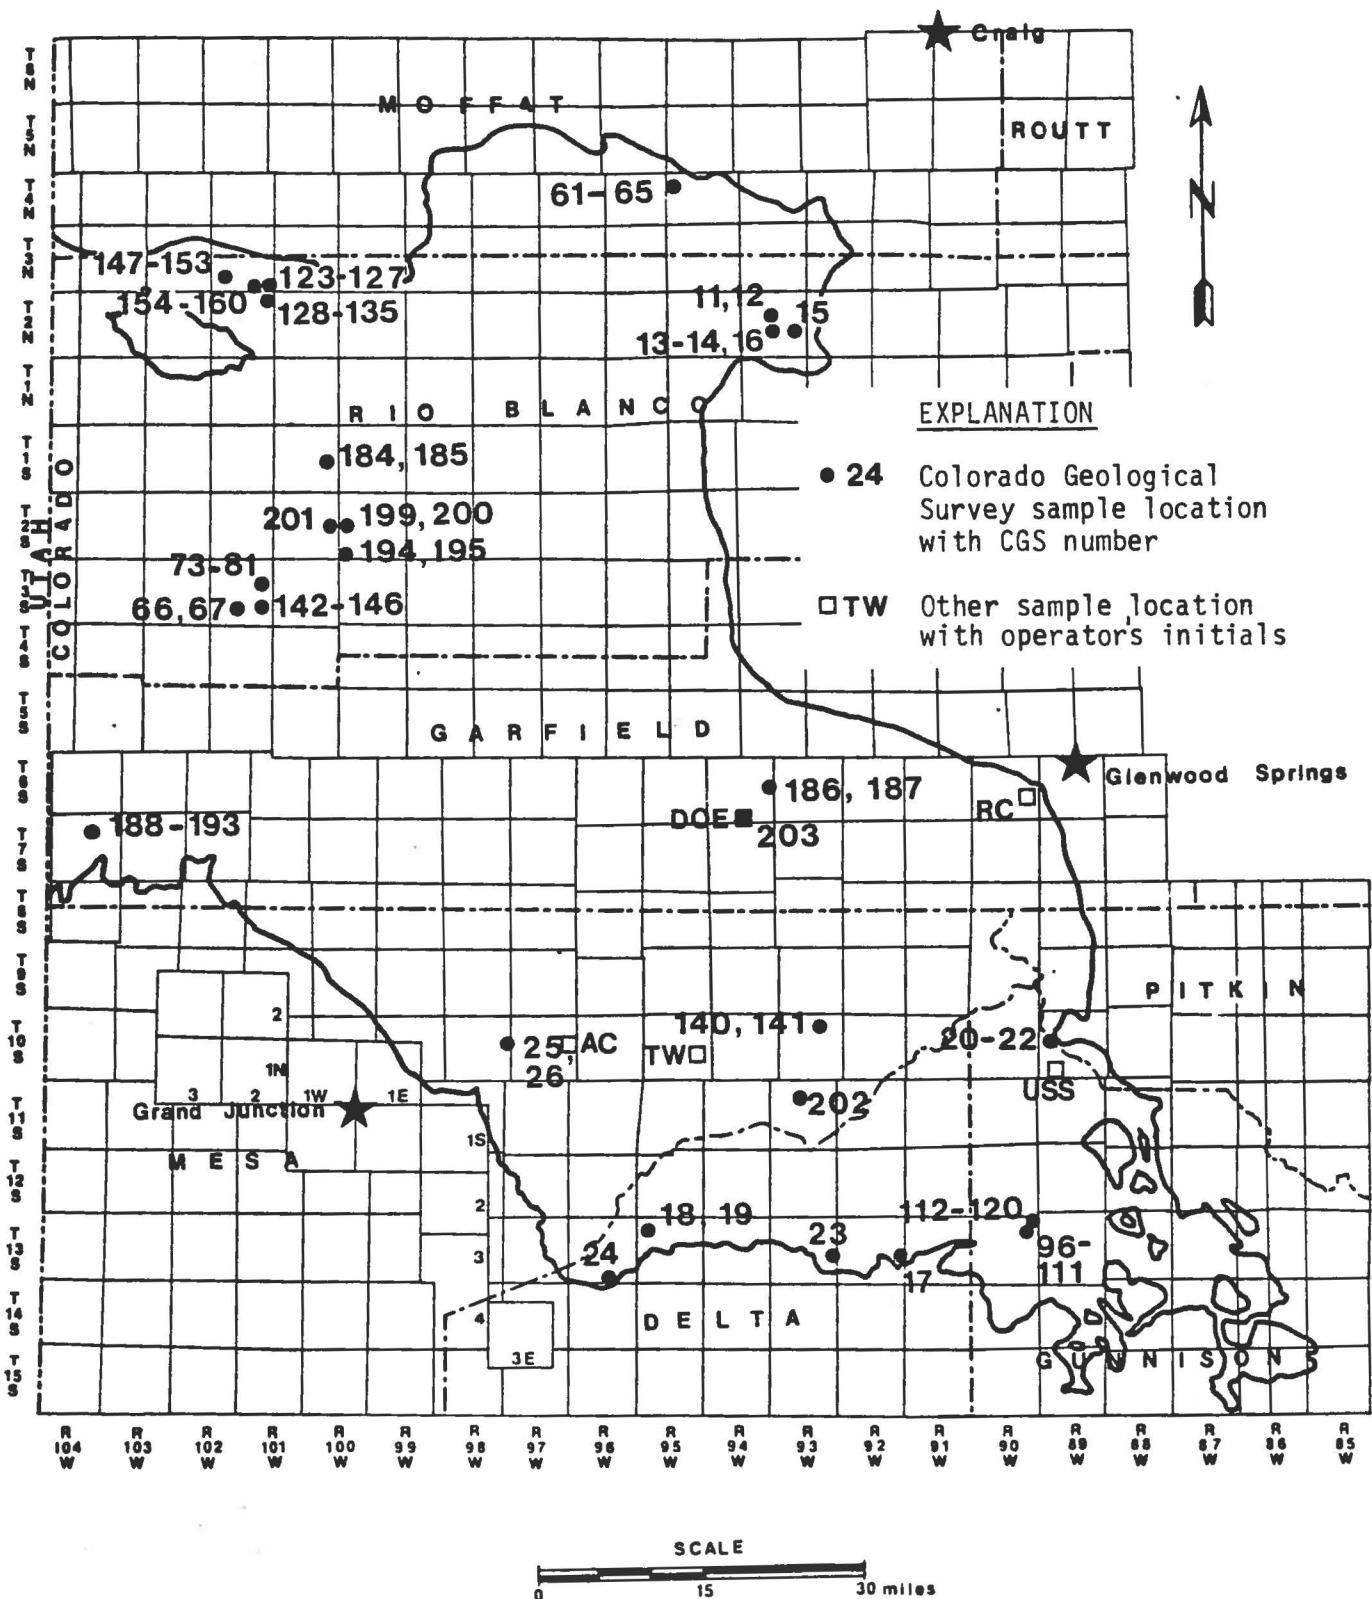


Figure 15. Locations of Colorado Geological Survey and other desorption samples in the Piceance Basin area.

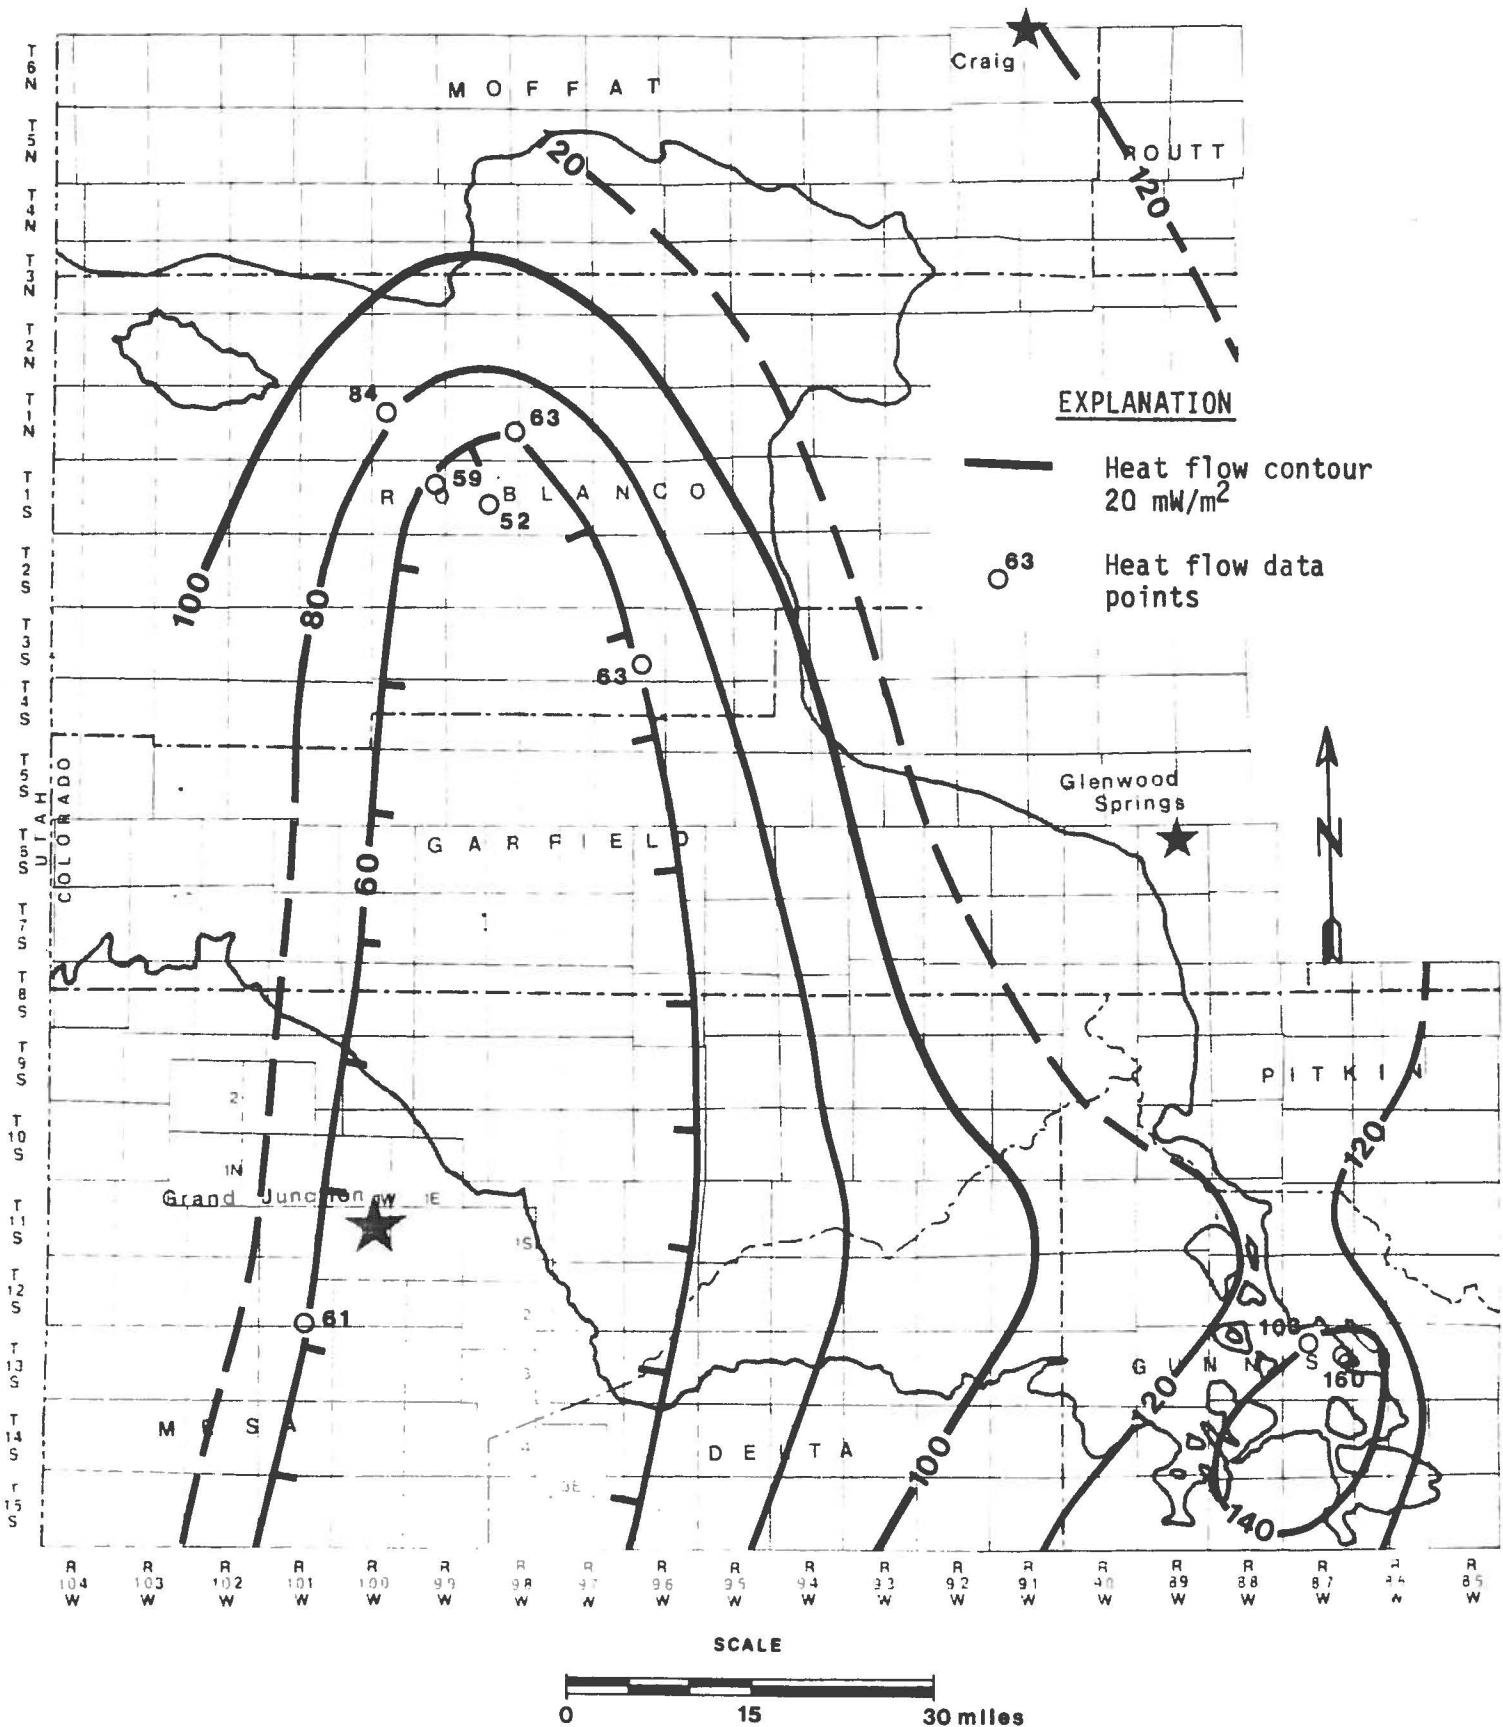


Figure 16. Heat flow map of the Piceance Basin (after Zacharakis, 1981).

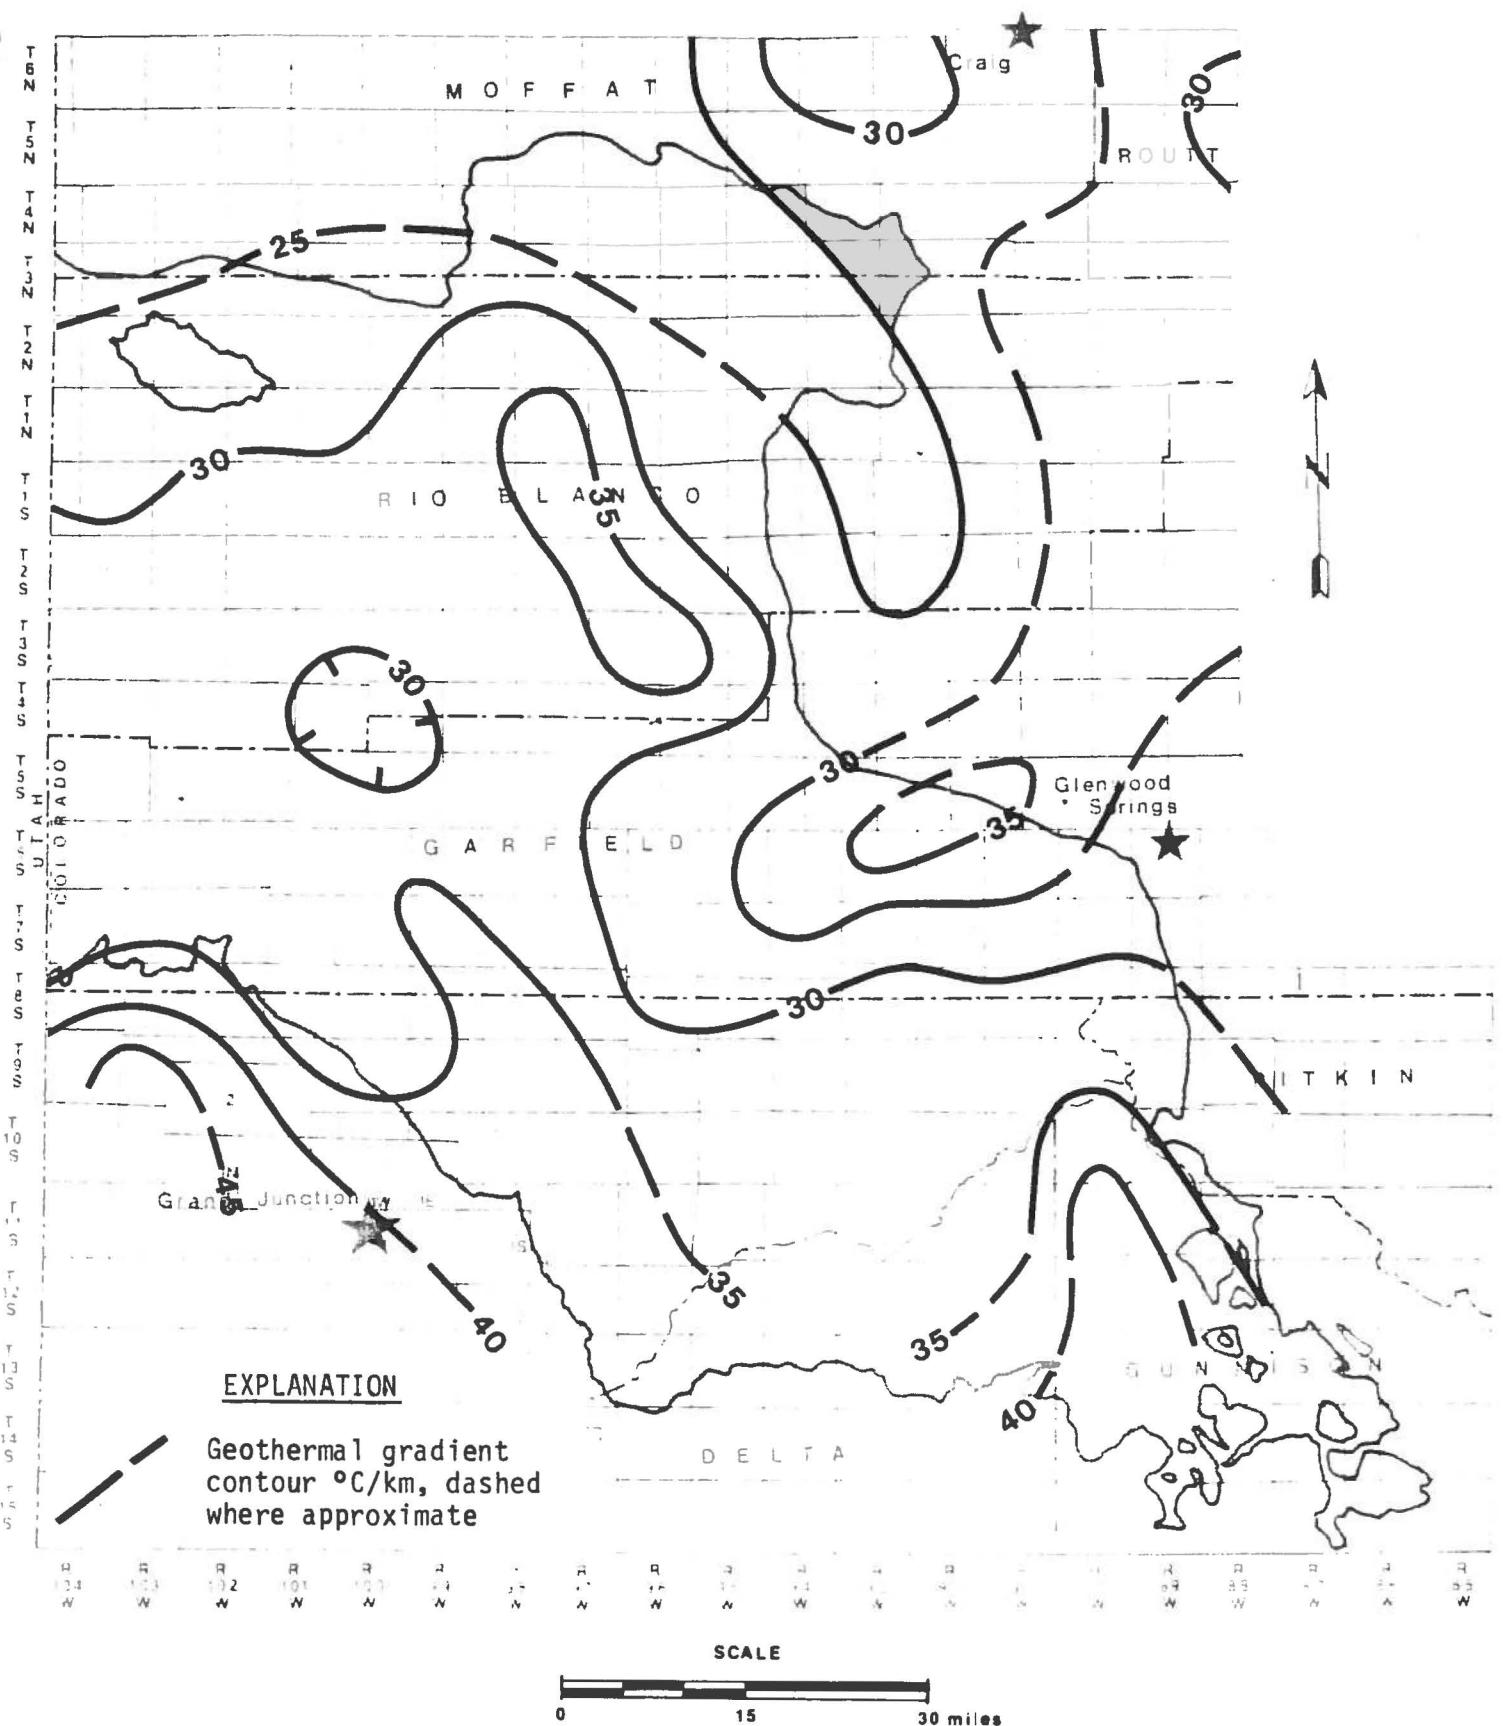


Figure 17. Geothermal gradient map of the Piceance Basin area (after Repplier et al., 1981).

The approximate overburden on the coals in the Piceance Basin can be found by subtracting a Rollins structure map from a topographic map. Choate et al (1981) have produced such a map for a large part of the basin and Ron Johnson of the U.S.G.S. will shortly publish a revised Rollins structure map.

Methane Estimate

In order to estimate the amount of methane that could be contained in the coals, we can make some volumetric calculations. First, we estimate the volume of coals for each rank. This is done by combining the net coal map (Plate 2) and the coal rank map (Plate 3) and planimetering the areas of coal in each coal rank-thickness polygon. All the volumes of coal calculated for one rank are summed to give the total coal volume at that rank. Then by multiplying the average gas content at that rank (calculated from Appendix 5 or Figure 18) by the volume of the coal, by the specific gravity of the coal, (from Ameri et al, 1981) and by a conversion factor, we can estimate the total gas resource for each coal rank type in the basin. In practice, since most of the gas is generated when coals reach high volatile A and higher ranks as shown in Figure 19, gas contents have only been estimated for these coals. The equations used for each of these coal rank categories are listed below:

High volatile A:	$65,447 \text{ sq mi ft} \times 1.36 \times .8698 \times 10^{-3} =$
	$77 \text{ billion tons} \times 200 \text{ cf/t} = 15 \text{ TCF}$
Medium volatile:	$70,541 \text{ sq mi ft} \times 1.36 \times .8698 \times 10^{-3} =$
	$83 \text{ billion tons} \times 450 \text{ cf/t} = 37 \text{ TCF}$
Low volatile:	$69,285 \text{ sq mi ft} \times 1.36 \times .8698 \times 10^{-3} =$
	$82 \text{ billion tons} \times 500 \text{ cf/t} = 41 \text{ TCF}$
Semi anthracite:	$5166 \text{ sq mi ft} \times 1.36 \times .8698 \times 10^{-3} =$
	$6 \text{ billion tons} \times 550 \text{ cf/t} = 3 \text{ TCF}$
<hr/>	
Total Gas:	= 96 TCF
96 TCF - 20%	= 77 TSCF
(trillion standard cubic feet)	

The U.S. Department of Energy estimates 53 trillion cubic feet for the entire basin (Ameri et al, 1981) and TRW, Inc. estimated 60 trillion cubic feet (Choate et al, 1981).

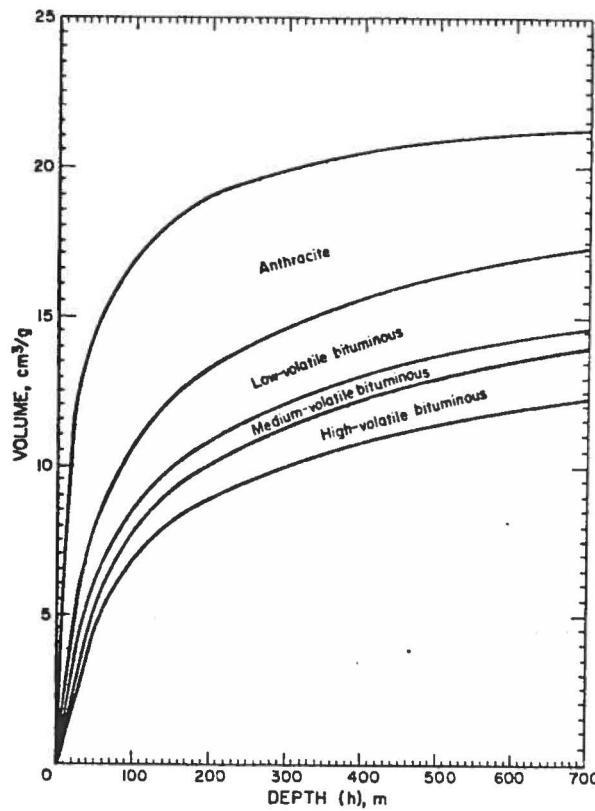


Figure 18. Estimated methane content with depth and rank (from Kim, 1977).

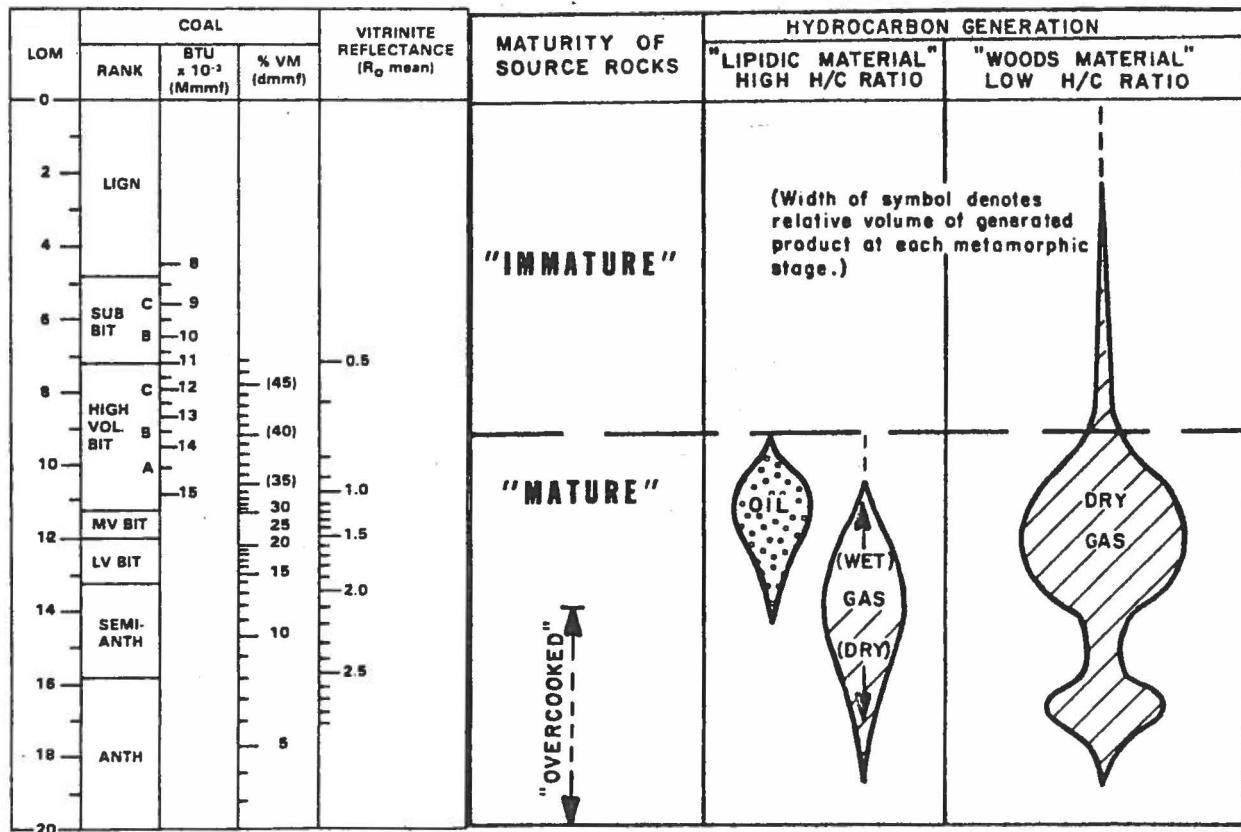


Figure 19. Gas generation at various coal ranks (after Childs, 1980 and Dolly et al, 1977).

Factors Affecting Producibility of Coal Bed Methane

However, having estimated this tremendous gas resource, we must note that only a small percentage of it may eventually be produced. Factors affecting the producability of coal bed methane include: 1) water saturation, 2) natural fracturing, 3) the extent of the reservoirs, 4) economics, and 5) drilling and completion techniques.

1. Water

Coal must be dewatered to allow the methane to desorb from the micropores in which it is held. This can be a problem if the hole is near a water recharge area, such as a stream, river or outcrop. The three American Public Gas Association coal bed methane holes drilled on the Purgatoire River west of Trinidad, Colorado, and a Snyder Oil Co. well near the outcrop of the Mesaverde Formation southwest of Glenwood Springs may be in such recharge areas. Of course, any water produced must be disposed of in an ecologically sound manner and aquifers must be protected according to the regulations of the Colorado Oil and Gas Conservation Commission.

Furthermore, in addition to the amount of water that a well might produce, the direction of water flow must be considered. Flow direction will influence hole locations if the wells are to be drilled in a pattern. (Pattern drilling is recommended by the U.S. Bureau of Mines to achieve dewatering most efficiently). The data needed to determine both the amount and direction of flow is scarce. The drill stem test data the author could find in lower Mesaverde coals and sandstones is presented in Table 1. Using this data, Bob Koenig (personal communication), calculated apparent depth to water of the wells tested within 100 ft above the Rollins Sandstone and found depths ranging from 96 to 5783 ft and averaging 2,650 ft in wells approximately 4,000-5,000 ft. Permeabilities were less than 2 millidarcies. However, he stated that this data may not be reliable in the basin since wells ranged from dry to flowing.

2. Natural Fracturing

Natural fractures will enhance the permeability of coals to both gas and water. Figure 20 is a lineation map of the northern part of the Piceance Basin by Frank Weller (1970), and is included as an aid in indicating fracture directions. The majority of the lineations on this map trend west-northwest. D. L. Sawatsky and Earl Berbeek, of the U.S. Geological Survey, are currently doing additional lineation studies in the basin. However, examination of air photographs of specific locations may be more helpful in selecting the most promising drill sites.

3. Extent of Reservoirs

The extent of the coal reservoirs is another important consideration affecting the eventual production of coal bed methane at any location. Individual beds anywhere from a few inches to 52 feet are present in the mapped area. However, thicknesses can vary over short distances. As mentioned earlier, thin beds correlated 139 feet in the MWX wells, but thick coal beds in the southeastern part of the basin maintained their thicknesses for only a few square miles.

Piceance Basin - heads_p calculated from
DST data - $hw = z + P_{grad}^*$

Well Location	Height above Rollins SS	Kelly Bushing Elevation	Recorder Depth	KB-RD =z	Maximum Shut In Pressure	hw Head of water
27-10S-96W	17	5985	2953	3032	158	3391
26-10S-96W	15	6009	3135	2874	210	3351
12-8S-97W	112	5168	4128	1040	1890	5335
12-9S-93W	539	7602	7431	171	580	1489
8-9S-92W	422	7665	7336	329	264	929
14-7S-99W	194	5990	3711	2279	1450	5574
22-6S-100W	28	6403	3182	3221	50 (20 min)	3335
13-11S-95W	36	9900	6529	3371	2280	8553
13-11S-92W	66	9436	6714	2722	1489	6106
12-10S-96W	269	6119	3656	2463	162 (30 min)	2831
31-8S-98W	32	5862	2308	3554	125 (15 min)	3838
32-2S-99W	69	7646	6885	761	2828	7188
.7-6S-100W	60	6910	2798	4112	49	4223
6-7S-99W	54	8256	5522	2734	414	3675
28-9S-91W	624	9179	7298	1881	2582	7749
10-10S-93W	12	8304	7648	656	1892	4956
17-12S-89W	406	6764	2144	4620	75	4790
34-11S-94W	3	10133	6215	3918	190	4350
23-10S-97W	7	5981	2760	3221	121	3496

*Pgrad (Pressure gradient) estimated at .44 from several water samples from MV fm.

Another important question is the trend directions of the coal beds. If the environmental interpretations mentioned earlier in this report are correct, the lowest coal beds near the regressive marine sandstones should be parallel to the ancient shoreline, and the higher fluvial-paludal coal beds parallel to the streams, or roughly perpendicular to the shore lines. As shown in Figure 7, shoreline trends are northeast-southwest. Lorenz (1983) reports northwest-southeast channel trends in the paludal zone based on sandstone percentage maps. Cross beddings trends from oriented cores from the CER-MWX wells may verify these sandstone trends in the future.

4. Economics

There are numerous economic factors affecting coal bed methane producability. Depth is a definite factor as drilling costs increase with depth. Gas price is affected by the gas market (currently depressed) and government regulations (currently coal bed methane is a decontrolled occluded gas). The presence of pipelines make an area more attractive. Fortunately, pipelines are already present in a good part of the Piceance Basin (see pipeline map, Figure 21).

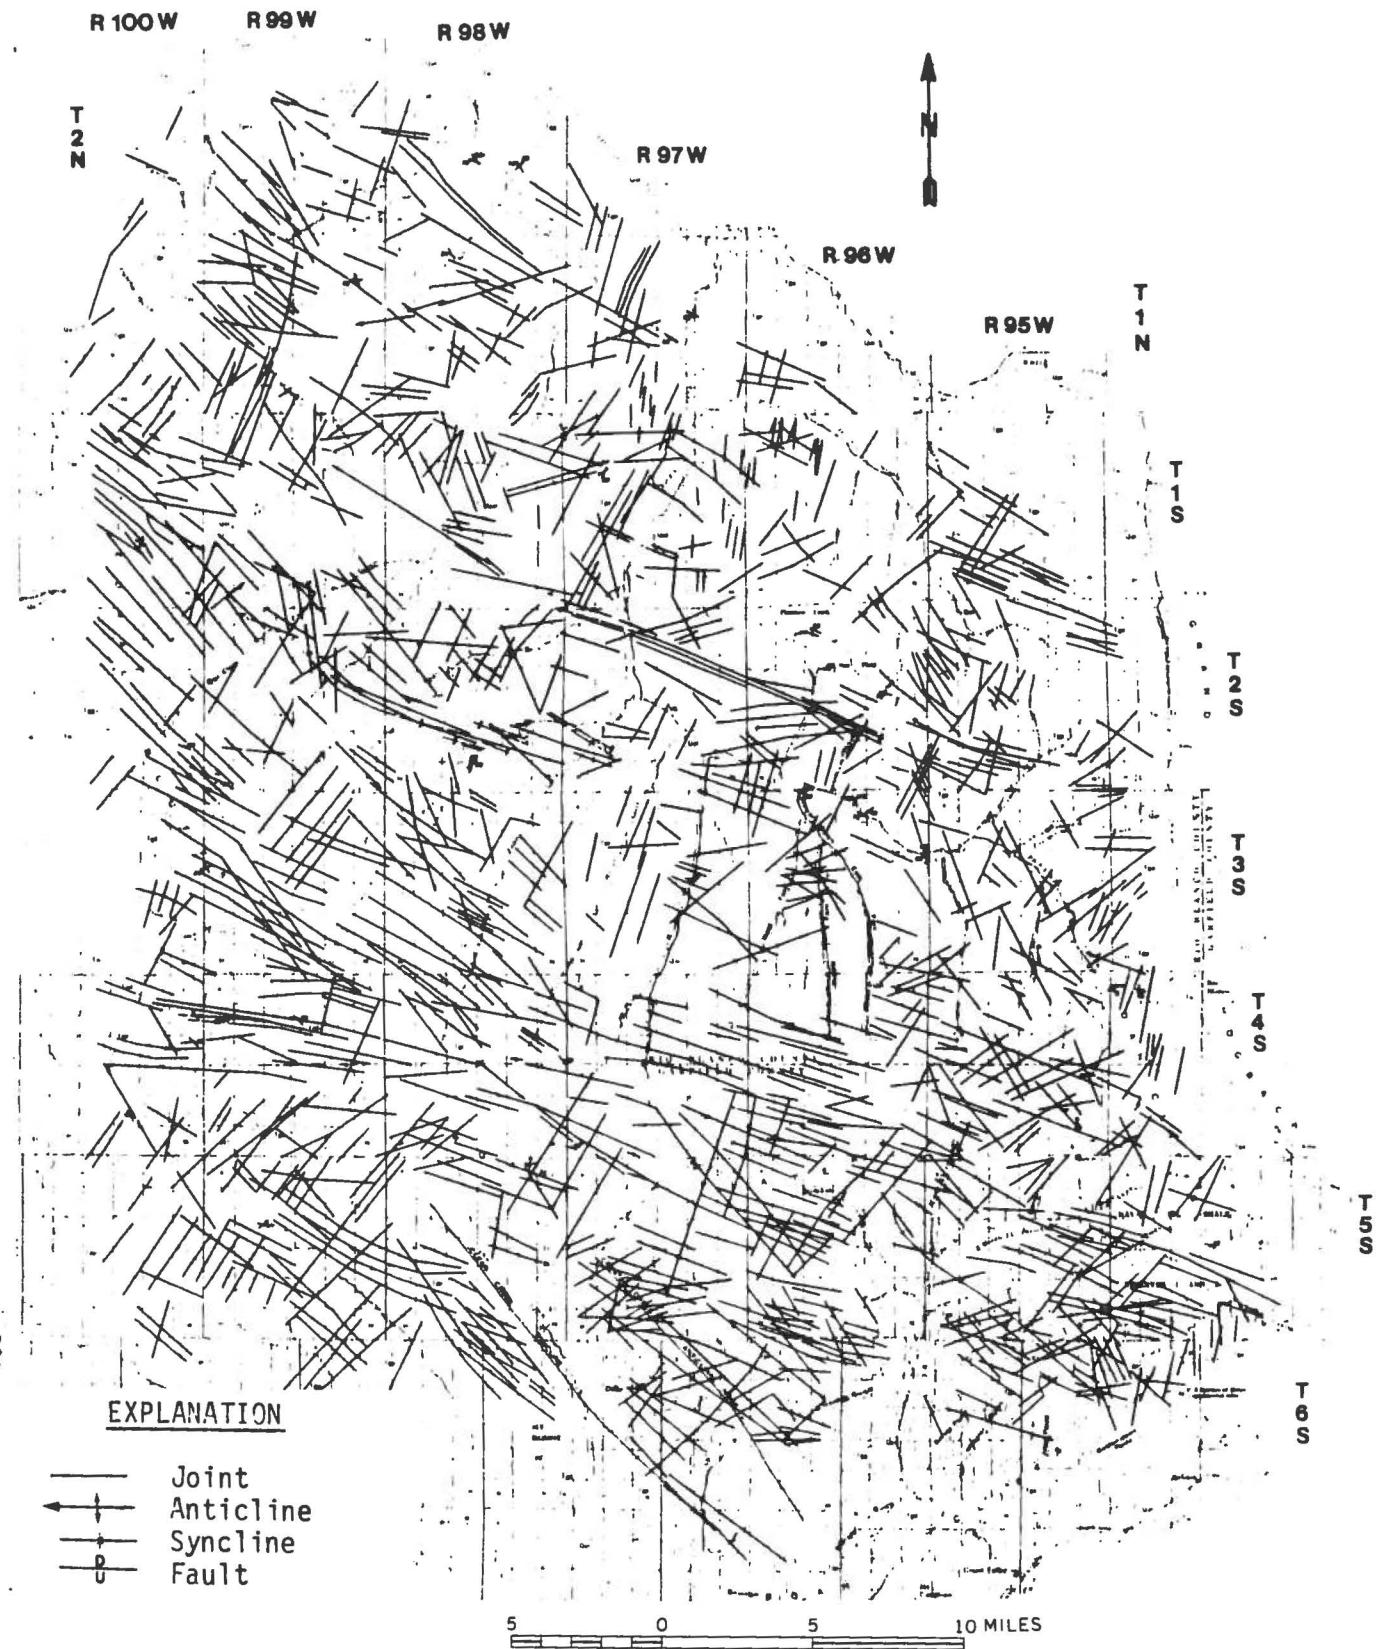


Figure 20. Lineation map of the northern Piceance Basin (from Welder, 1970).

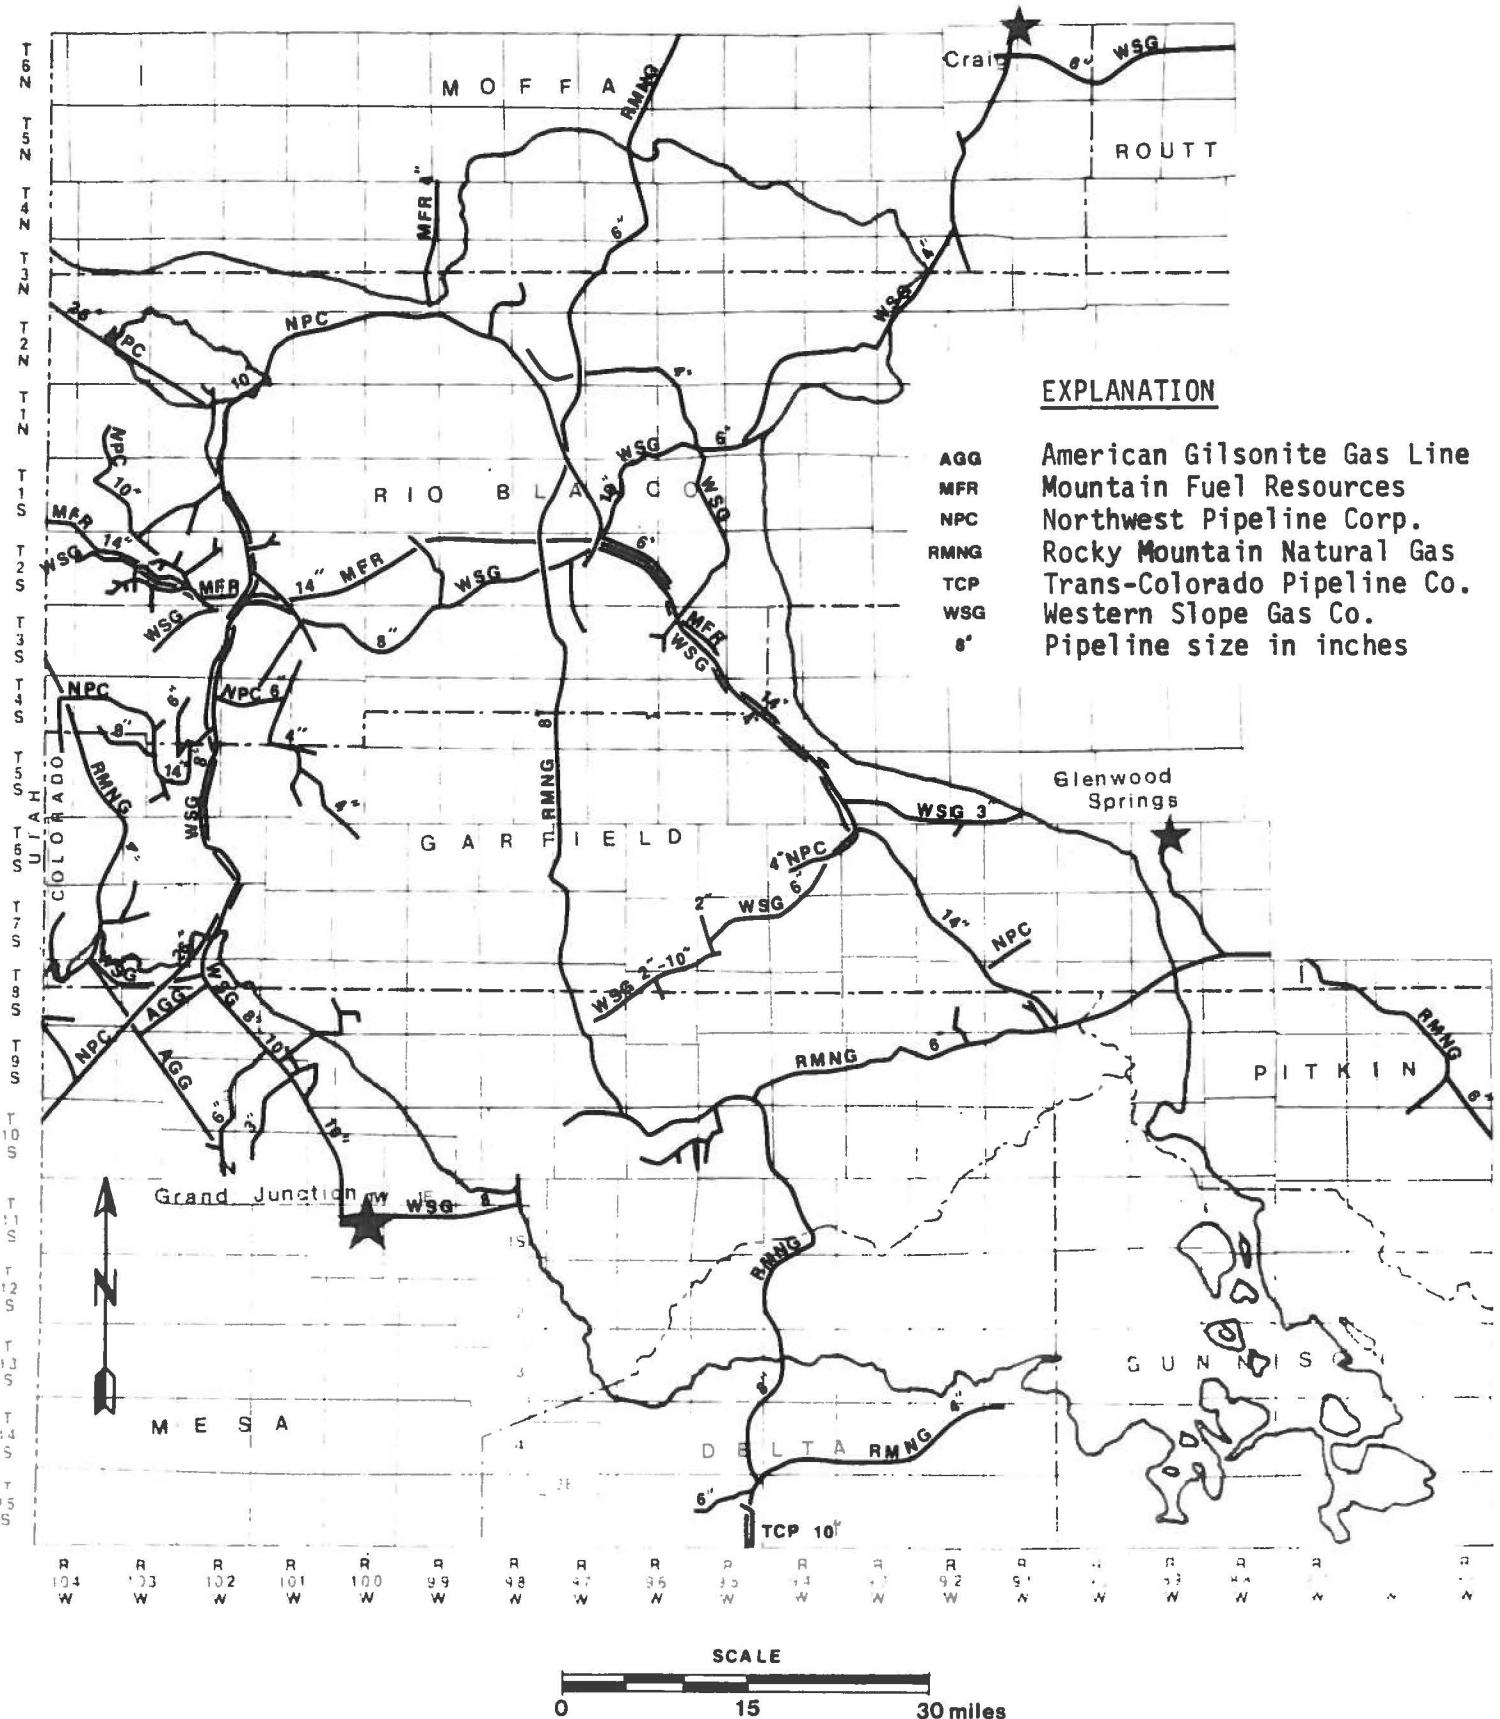


Figure 21. Gas pipelines in the Piceance Basin (from Colorado Public Utilities Commission, 1982).

5. Drilling and Completion Techniques

Drilling and completion techniques also can add significantly to the cost and affect the economic viability of a particular location. The best techniques for coal bed methane still are being determined.

Drilling with mud may damage the coal formation. This is suspected at the Tiffany Glover #1 well in the San Juan Basin and the three APGA holes in the Raton Basin. However, Amoco successfully completed several mud drilled holes in the New Mexico portion of the San Juan Basin. There is a precedent for air, gas, and foam drilling of easily damaged zones such as the Mesaverde Formation in the Piceance Basin; Sneed and Mencher (1962) describe these methods. The use of gas soluble oil based mud, while it may prevent damage to Mesaverde sandstones, seems to adversely affect desorption results from coal core samples (Choate, personal communication) and may also cause reservoir damage.

Perforating and fracturing the coal beds may not be a successful strategy in the Piceance Basin. The Snyder, Exxon, Rio Colorado, and Coseka wells listed in Appendix 3, Section 5, all were perforated and fractured in coal beds and did not have satisfactory sustained production. Possible problems these wells may have encountered include: coal fines plugging the perforations or fractures, loss of fracturing fluid, the driving of formation-damaging mud further into the formation, or the lack of gel breakdown.

On the other hand, open hole completion has been successful in the San Juan and Raton Basins of Colorado. Amoco has open hole completed several wells in the San Juan Basin by merely under-reaming coals to a 14-inch hole diameter. These wells are approximately 3,000 feet deep, and one has a production of 1 MMCFGD after a three-year production history. In addition, Wood, McShane, and Thams have completed three out of four holes drilled in the Raton Basin as gas wells using open hole completions. No production data is yet available on these wells. Open hole completion is recommended by the U.S. Bureau of Mines after extensive experience completing coal seams in the eastern part of the country (Lambert et al, 1980). Open hole foam fracturing has been a successful stimulation procedure for the U.S. Bureau of Mines in the East, although this strategy has not been successful in the three APGA holes mentioned earlier. Possibly Western Cretaceous coals are not as mechanically strong as Eastern Pennsylvanian age coals and tend to produce more fracture clogging fines.

Many of these questions may soon be answered. The Gas Research Institute, in cooperation with industry, intends to conduct a multiple well deep coal seam gas drainage project near Collbran, Colorado in the southern half of the Piceance Basin. The first well should spud this year. Appendix 6 is an excerpt from their research and development plan.

CONCLUSION

There are numerous indications that coal bed methane is present in the Piceance Basin. This methane appears of sufficient quantity and present in large enough reservoirs to make the Piceance the basin with the greatest amount of methane in the country. However, the best production and completion techniques for recovering coal bed methane in the basin have not

yet been determined as evinced by the number of unsuccessful completions. Nor have the geological factors affecting production been more than approximated. It is hoped that future drilling, and particularly the multi-well coal bed methane experiment to be carried out by GRI will answer some of these questions.

REFERENCES CITED

- Ameri, Sam, Al-Saadon, F. T., and Byrer, C. W., 1981, Coalbed methane resource estimate of the Piceance Basin, final report: U.S. Dept. of Energy, DOE/METC/TPR/82-6, 44 p.
- Boreck, D. L., and Tremain, C. M., 1981, The coalbed methane potential of the Sand Wash Basin, Green River coal region, Colorado: Colorado Geol. Survey Open File Rept. 81-6, 25 p.
- CER Corporation, 1982, Western gas sands project: an approximation of continuity of lenticular Mesaverde sandstone lenses, utilizing close well correlations, Piceance Basin, northwest Colorado, 32 p.
- Choate, Raoul, Jurich, David, and Saulnier, G. J., Jr., 1981, Geologic overview coal deposits, and potential for methane recovery from coalbeds Piceance Basin, Colorado: TRW Piceance Basin Report.
- Collins, B. A., 1976, Coal deposits of the Carbondale, Grand Hogback and southern Danforth Hills coal fields, eastern Piceance Creek Basin, Colorado: Colorado Sch. Mines Quarterly, v. 71, no. 1, 138 p.
- Colorado Public Utilities Commission, Colorado natural gas pipelines, map, 1982.
- Curtis, B. F., 1962, The geologic development of northwestern Colorado, in Exploration for oil and gas in northwestern Colorado: Rocky Mtn. Assoc. Geologists, p. 15-22.
- Diamond, W. P., and Levine, J. R., 1981, Direct method determination of the gas content of coal: procedures and results: U.S. Bur. Mines Rept. Inv. 8515, 36 p.
- Dunn, H. L., 1974, Geology of petroleum in the Piceance Creek Basin, northwestern Colorado, in Guidebook to the energy resources of the Piceance Creek Basin, Colorado: Rocky Mtn. Assoc. Geologists, p. 217-223.
- Fender, H. B., and Murray, D. K., 1978, Data accumulation on the methane potential of the coal beds of Colorado: Colorado Geol. Survey Open File Rept. 78-2, 25 p.
- Gale, H. S., 1910, Coal fields of northwestern Colorado and northeastern Utah: U.S. Geol. Survey Bull. 415, 265 p.
- Gas Research Institute, 1982, Deep coal seam project -- summary document, October 5, 1982 meeting, 32 p.
- Kim, A. G., 1977, Estimating methane content of bituminous coalbeds from adsorption data: U.S. Bur. Mines Rept. Inv. 8245, 22 p.
- Kindley, Mark, 1982, Interest grows in coal bed methane, technological, legal problems persist: Am. Assoc. Petroleum Geol., Explorer, v. 4, no. 3, p. 1, 6.

- Lambert, S. W., Trevits, M. A., Steidl, P. F., 1980, Vertical borehole design and completion practices to remove methane gas from mineable coalbeds: U.S. Dept. of Energy Rept. Inv. DOE/CMTC/TR-80/2, 163 p.
- Lorenz, J. C., 1983, Reservoir sedimentology in Mesaverde rocks at the MWX site: Sandia National Laboratories, 17 p.
- MacMillan, Logan, 1980, Oil and gas of Colorado: a conceptual view in Colorado geology: Rocky Mtn. Assoc. Geologists, p. 191-197.
- Millison, Clark, 1962, Accumulation of oil and gas in northwestern Colorado controlled principally by stratigraphic variations, in Exploration for oil and gas in northwestern Colorado: Rocky Mtn. Assoc. Geologists, p. 41-44.
- _____, 1968, Gas occurrence in Upper Cretaceous and Tertiary rocks of Piceance Basin, Colorado in Natural gases of North America--Part 2, Natural gases in rocks of Mesozoic Age, Am. Assoc. Petroleum Geologists, Mem. 9, v. 1, p. 878-898.
- Murray, D. K., 1980, Coal in Colorado in Colorado geology: Rocky Mtn. Assoc. Geologists, 1980 Symposium, p. 205-216.
- Nuccio, V. F., and Johnson, R. C., 1981, Map showing drill stem test and perforation recoveries of the Upper Cretaceous Mesaverde Group, Piceance Creek Basin, Colorado: U.S. Geol. Survey Map MF-1359, scale 1:250,000.
- Quigley, M. D., 1965, Geologic history of Piceance Creek - Eagle Basins: Am. Assoc. Petroleum Geologists Bull., v. 49, no. 11, p. 1974-1996.
- Repllier, F. N., and Fargo, R. L., 1981, Geothermal gradient map of Colorado: Colorado Geol. Survey Map Series 20, scale 1:1,000,000.
- Sanborn, A. F., 1977, Possible future petroleum of Uinta and Piceance Basins and vicinity, northeast Utah and northwest Colorado in Exploration frontiers of the central and southern Rockies: Rocky Mtn. Assoc. Geologists -- 1977 Symposium, p. 151-166.
- Scanlon, A. H., 1982, Oil and gas fields of Colorado: statistical data through 1981: Colorado Geol. Survey Inf. Series 18, 72 p.
- Sneed, R. W., and Mencher, A. H., 1962, Air-gas drilling in northwestern Colorado, in Exploration for oil and gas in northwestern Colorado: Rocky Mtn. Assoc. Geologists, p. 136-143.
- Tremain, C. M., Boreck, D. L., and Kelso, B. S., 1981, Methane in Cretaceous and Paleocene coals of western Colorado, in Western slope Colorado: New Mexico Geological Society, 32nd Field Conference Guidebook, p. 241-248.
- Warner, D. L., 1964, Mancos-Mesaverde (Upper Cretaceous) intertonguing relations southeast Piceance Basin, Colorado: Am. Assoc. Petroleum Geologists Bull., v. 48, no. 7, p. 1091-1107.

Welder, F. A., 1970, Map showing joint pattern inferred from aerial photographs: U.S. Geol. Survey, unpublished map, scale 1:125,000.

Young, R. G., 1959, Cretaceous deposits of the Grand Junction area, Garfield, Mesa, and Delta Counties, Colorado, in Symposium on Cretaceous rocks of Colorado and adjacent areas: Rocky Mtn. Assoc. Geologists, p. 17-25.

Zacharakis, T. G., 1981, Revised heat flow map of Colorado: Colorado Geol. Survey Map Series 18, scale 1:1,000,000.

APPENDIX 1 - Oil and Gas Fields in the Piceance Basin Area

COUNTY FIELD NAME (Oil, Gas) Year Discovered/ Abandoned	GENERAL LOCATION Twp., Rge.	NO. WELLS OF PROD'G CAPABLE OF PROD'G	PRODUCING FORMATION OR ROCK UNIT	AGE	CUMULATIVE PRODUCTION TO 12-31-81			WATER FLOOD (No. Injection Wells)	GAS INJECTION (No.wells)	REMARKS
					OIL(bbls)	GAS(MCF)	CONDENSATE (bbls)			
GARFIELD COUNTY										
BALDY CREEK (G) 1959/	7S - 90W		Mancos Sh/ Corcoran	U.K.		5,922		A		Mancos Abd. 1962; re-activated 1981
		2	Cozette	U.K.		241,012		2P		
BAXTER PASS (G) 1958/ (see Rio Blanco Co.)	4S - 103W	1	Mancos 'B'	U.K.		3,424		1SI		
BAXTER PASS-SOUTH (G)	5S - 102W	3	BLAMCO & GARFIELD Morrison	J	1,106	1,089,629				
						242,445		1SI;2P		
BRIDLE (G) 1976/	8S - 104W	18	Dak-Mor	U.J.- L.K.		5,508,995	9	10P		
CARBONERA (G) 1957/	7S - 104W	1	Entrada	J	3,822			1AL		
			Buckhorn/	L.K.		310,709		1P		
			Dakota	L.K.						
CASTLE 1957/	7S - 99W	2	Dakota	L.K.	121	744,570		1SI;1P		
				U.K.				SI		No production recorded.
DIVIDE CREEK (G) 1956/ (see Mesa Co.)	7S - 91W	1	Mv Grp.	U.K.		1,279,632		1P		
	BS - 91W	1	Rollins/			29,640		1P		
	7S - 91W		Corcoran/Corc.	U.K.		894				
						45,614,123				
DOUGLAS PASS (G) 1977/	5S - 102W	4	Dakota	L.K.		391,251		4P		
		2	Dak-Morr	U.J.-L.K.		942,198	123	2P		
EVACUATION CREEK (G) 1977/ (see Rio Blanco Co.)	4S - 102W	1	Dakota	L.K.		45,546		1P		
FOUNDATION CREEK (G) 1973/ (see Rio Blanco Co.)	4S - 102W	1	Mancos 'B'	U.K.		546,667				
						59,283		1P		
GARMESA (G) 1925/	7S - 103W	2	Entrada	J		3,349,998		2SI		
		1	Morr-Dak	U.J.- L.K.		2,001,213		1SI		
			Dakota	L.K.		1,784,403		1SI		
			Mv Grp.	U.K.	443	762,842		1P;1SI		
MAM CREEK (O) 1959/	6S - 93W	2								
PRairie CANYON (G) 1958/	7S - 104W	2	Dak-Morr/	U.J. &		2,284,657		2P		
ROCK CANYON (G) 1973/	5S - 102W	2	Dak.	L.K.						
RULLISON (G) 1956/	6S - 93W	20	Dakota	L.K.		188,797		2P		
	6S - 94W	30	Salt Wash	U.J.		411,969		1P		
	7S - 94W		Mv Grp.	U.K.		4,927,084	4,964	1SI;19P		
	7S - 95W		Wasatch	Tertiary		2,081,318		30P		
SOLDIER CANYON (G) 1976/ (see Rio Blanco Co.)	4S - 100W	2	D	U.K.		43,343		2SI		
		1	Mancos 'B'	U.K.	200	9,799		1P		
					200	107,392				
SOUTH CANYON (G) 1957/ (see Mesa Co.)	6S - 103W	46	Buckhorn	L.K.		19,442,828	470	2SI;44P		
	7S - 103W		Dakota	L.K.						
	6S - 104W	26	Dak-Morr	U.J.- L.K.		5,805,222	3,733	1SI;25P		
	7S - 102W									
TRIAL CANYON (G) 1969/ (see Rio Blanco Co.)	4S - 101W	2	FIELD TOTALS FOR GARFIELD & MESA			25,253,860	4,203			
		1	Dakota	L.K.		232,270		2P		
			Mancos 'B'	U.K.		1,443		1P		
TWIN BUTTES (G) 1951/	5S - 102W	1	FIELD TOTALS FOR GARFIELD & RIO BLANCO		3,845	4,499,465	72			
	2	Morrison	J			3,412,316	44	1P		
	3	Dak-Morr	U.J.-L.K.			742,335		1SI;1P		
	3	Dakota	L.K.			167,362		1SI;2P		
	1	Niobrara	U.K.		3,478	6,260		1SI		
MESA COUNTY										
ASBURY CREEK (G) 1949/1965	9S - 101W		Dakota	L.K.		2,406,841		A	2SI	storage project
BAR X (G) 1953/	8S - 104W	8	U. Morr./ Saltwash/	J	21,280	4,457,647		4SI;3P;1AL		
		2	Dakota	L.K.						
BRONCO FLATS (G) 1981/	9S - 98W	3	Entrada	J		899,084	410	2P		
		1	Morrison	J	8,874	253,401		2P;1AL		
		1	Cedar Mt.	L.K.		59,567		1P		
		1	Dakota	L.K.		22,347		1P		
BUZZARD (G) 1958/	9S - 94W	5	Dak./Morr.	U.J.-L.K.		58,914		1P		
	9S - 94W		Mv/	U.K.		1,489,891		2SI;3P		
BUZZARD CREEK (G) 1955/	9S - 93W	2	Cozette/							
CAMEO (G) 1961/	9S - 98W	1	Corcoran							
COAL GULCH (G) 1956/	8S - 101W	1	Mv Grp.	U.K.		4,599,076		1SI;1P		
COON HOLLOW (G) 1958/	8S - 98W	1	Cozz./Corc.	U.K.		22,649		1P		
DeBEQUE (G) 1962/	8S - 97W	2	Dakota	L.K.		29,238		2SI		SI for pipeline
	9S - 99W	5	Mv	U.K.						
DIVIDE CREEK (G) 1956/ (see Garfield Co.)	8S - 91W	5	Mv Grp.	U.K.		122,489		1P		
FRUITA (G) 1961/1971	9S - 101W		FIELD TOTALS FOR MESA & GARFIELD			44,304,851		5P		
			Morr.	J		45,614,123				
						607,228				
GRAND MESA (G) 1958/1973	11S - 94W		Mv Grp.	U.K.		741		A		
HELLS GULCH (G) 1964/1981	8S - 92W		Mv Grp.	U.K.		150,397		P & A 1/81		
HIGHLAND CANAL (G) 1951/1961	9S - 103W		Dakota	L.K.		89,288		A		
			Salt Wash	U.J.		184,129		A		
HORSETHIEF CREEK (G) 1964/	8S - 96W	1	Wasatch	Eocene		141,282		1SI		Abd.-1956. Reac- tivated prior to 1960 - no record. SI indefinitely

COUNTY	FIELD NAME (Oil, Gas)	GENERAL LOCATION Twp., Rge.	NO. WELLS PROD'G OR CAPABLE OF PROD'G	PRODUCING FORMATION OR ROCK UNIT	AGE	OIL(bbls)	GAS(Mcf)	CUMULATIVE PRODUCTION TO 12-31-81	CONDENSATE (bbls)	FIELD STATUS	WATER FLOOD (No. Injection Wells)	GAS INJECTION (No.wells)	REMARKS
<u>MESA COUNTY (CONT.)</u>													
HUNTERS CANYON (G)	8S - 100W	5	Mv Grp.	U.K.		2,275,768				ISI;4P			
1955/		1	Dakota	L.K.		41,002				1P			
MACK CREEK (G)	9S - 102W		Morrison	J		238,007				A			
1957/1970			Burro Canyon	L.K.		13,171				A			
LEON CREEK	10S - 93W	1		U.K.						ISI			
1961/												No production recorded.	
PEACHTREE	9S - 103W											No production recorded.	
1979/													
PLATEAU (G)	10S - 95W	74	Mv Grp.	U.K.		10,566,868			423	9S1;6SP			
1958/	10S - 96W		Dakota	L.K.									
ROBERTS CANYON (Unit)	9S - 97W	1											
1960/ (G)	10S - 97W											SI indefinitely	
	9S - 98W												
ROCK (O)	8S - 103W	1	Dakota	L.K.		628				ISI			
1976/													
SHEEP CREEK (G)	9S - 92W		Cozz./Corc.	U.K.		1,820				A			
1958/1973			Marapos	U.K.		65,190				A			
SHIRE GULCH (G)	10S - 96W	2	Dakota	L.K.		280,873				2P			
1960/	9S - 97W	12	Corcoran	U.K.		517,472				2S1;10P			
		1	Dak./Front.	L.K./U.K.		43,436				1P			
		1	Mancos	U.K.		17,168				1P			
		4	Mv	U.K.		214,486				4P			
SOUTH CANYON (G)	8S - 104W	1	Dakota	L.K.		2,022				1P			
1981/ (see Garfield Co.)		1	Dak.-Morr.	U.J.-L.K.		3,788				1P			
			FIELD TOTALS FOR GARFIELD & MESA			25,253,860			4,203				
VEGA (G)	10S - 93W	3	Cozette	U.K.						143,575			
1977/													
<u>MOFFAT COUNTY</u>													
BELL ROCK	6N - 92W	1								ISI			No production recorded.
1973/													
BIG GULCH (G)	7N - 93W	4	Mv Grp.	U.K.		3,045,509			4,182	2S1;2P	DW		
1960/			Frontier	U.K.									No production recorded.
BIG HOLE (G)	10M - 94W	10	Lewis Sh.	U.K.		2,928,877			20,434	2S1;8P			
1968/													
BLACK MOUNTAIN (G)	10N - 90W	3	Lewis Sh.	U.K.	72	17,465				3P			
1981/													
BLUE GRAVEL (G)	9N - 91W	7	Lewis Sh.	U.K.		3,317,653			767	4S1;3P			
1968/													
BUCK PEAK (O)	6N - 90W	3	Weber	Penn/ Permian	2,871	2,276,296			466	P&A 10/77			
1956/										3S1			
		6	Shinarump Cng	Triassic	329	340				P&A 4/57			
		4	Miobrara	U.K.	1,864,930	2,031,340				6AL			
		2	Mancos	U.K.	1,635,395	1,855,976				4AL			
CRAIG DOME (G) (BREEZE DOME)	6N - 91W	1	Trout Creek	U.K.		514,310				2S1			
1932/			Marapos	U.K.		213,873				A			
			Frontier	U.K.		1,501,587			466	1P			
CRAIG-NORTH (G)	8N - 90W	13	Lewis	U.K.	2,887	10,573,198			19,347	ISI;11P;			
1956/										1F			
DANFORTH HILLS (O)	5N - 95W	1	Weber	Penn/ Permian	381,857	8,098				1AL			
1954/													
		1	Sundance	J	1,697,157	36,799				1AL	1		Inj. started 6/63 - Sundance
		1	Morrison	J	1,051,519	142,987				1AL	1		
		1	Dakota	L.K.	251,719	88,903							Inj. started 3/62 - Morrison
DANFORTH HILLS-NORTH	5N - 95W		Shinarump Cng	Tr.	34,679	5,546				1AL			
1958/ (O)		3	Moenkopi	Tr.	727	565				P&A 10/59			Inj. started 3/16/62
DIOSAUR (O)	3N - 104W	1	Morrison	J	370,089	115,223				3AL			
1977/			Mancos 'B'	U.K.	107					ISI			
ELK SPRINGS (O)	5N - 98W	1	Weber	Penn/ Perm.	530,369	13,030				1AL			
1926/			Lance	U.K.		311,059							
FOUR MILE CREEK (G)	11N - 91W									A			
1958/1971	12N - 91W												
GREAT DIVIDE (G)	9N - 93W	4	Mid. Lewis	U.K.		1,584,347			12,045	4P			
1978/													
HIAWATHA (G)	12N - 100W	9	Ft. Union	Pal.	75,601	17,322,661				ISI;6P;1F;1AL			
1926/		34	Wasatch	Pal.	3,513,851	93,512,732				16S1;12P;6AL			
		1	Entrada/Hugget	J		1,124,867				1P	DW		
HIAWATHA-WEST (G)	12N - 100W	26	Ft. Union/Wasatch/	Pal./Eoc.	9,112	128,715,572			197,968	5S1;21P			
12N - 101W			Lewis	U.K.									
			Mv	U.K.									
			Lance	U.K.									
			Dakota	L.K.									
HORSE GULCH (O)	5N - 91W	1	Dakota	L.K.	211,590					A (1971)			
1965/			Shinarump Cng	Tri.	7,933					1AL			Inactive 1971 & 1980
ILES (O)	4N - 92W	10	Sundance	J	16,850,785	1,984,566				1S1;9AL			
1924/		1	Curtis	J	62,495					1AL			
		1	Morrison	J	1,334,836	55,186				TA			Slow production
IRISH CREEK (G)	12N - 99W	1	Mowry	L.K.	147,470					P&A 1953			
1961/			Mv	U.K.		14,393				1P			
LAY CREEK (G)	8N - 92W	1	L. Mv Grp.	U.K.		5,604,355			25	1P			
1955/	8N - 93W												
LITTLE SNAKE (G)	12N - 95W		Ft. Union	Pal.		386,045				A			
1958/1969													
MAUDLIN GULCH (O)	4N - 95W	2	Weber	P-Perm.	6,337	799				P&A 10/74			
1947/			Sundance/	J	2,487,046	352,948				2AL	2 DW		
		12	Morrison	J	4,302,006	893,101							
MOFFAT (O)	5N - 91W		Dakota	L.K.						6S1;6P			
1924/			Minturn	P	2,990					P&A 1965			
			Weber	P-Perm.	724,228	148,798				P&A 4/73			
		3	Shinarump Cng/	Tri.	8,351,910	82,532				3AL			
			Sundance/	J									
			Dakota/Moffat	L.K.									
		3	Miobrara	U.K.	94,965	14,031				ISI;1F;1AL			
POLE GULCH (G)	12N - 92W	3	Lewis	U.K.	4,480	6,388,991			1,344	3P			
1965/													
POWDER WASH (G)	11N - 97W	68	Ft. Union	Pal.	780,180	101,864,573				16S1;46P;6F			
1931/	12N - 97W	32	Wasatch	Eocene	4,496,830	82,754,125				12S1;15P;5AL			Water inj. started 5/68 - Wasatch

COUNTY FIELD NAME (Oil, Gas) Year Discovered/ Abandoned	GENERAL LOCATION Twp., Rge.	NO. WELLS PROD'G OR CAPABLE OF PROD'G	PRODUCING FORMATION OR ROCK UNIT	AGE	OIL (bbls)	CUMULATIVE PRODUCTION TO 12-31-81	CONDENSATE (bbls)	FIELD STATUS	WATER FLOOD (No. Injection Wells)	GAS INJECTION (No.wells)	REMARKS
<u>MOFFAT COUNTY (CONT.)</u>											
ROUND TABLE (O) 1967/1969	12N - 96W		Ft. Union	Pal.	954			A			
SHELL CREEK (G) 1955/	11N - 100W	1	Ft. Union Nugget	Pal. U.K.(?)	1,440 2,695,897	158,290 198,265	4,100 2,113	A (1971) IP			No production recorded
SLATER DOME 1954/	12N - 89W										
STATE LINE (G) 1976/	12N - 94W	3	Ft. Lewis/ Lance/Lewis	U.K.		146,325		1SI;2P			
SUGAR LOAF (G) 1953/	12N - 101W	14	My Ft. Union	U.K. Pal.	2,302 430	60,068,003 198,265	244,377 2,113	14P 1SI;1P DW			
TEMPLE CANYON (O) 1953/	4N - 95W	2	Shinarump Cng	Tri. Morrison Dakota Weber	169,649 27,263 783 P-Perm.	19 17,500 140 6,408,283		P&A 10/62 P&A 11/68 3SI;1P 2SI			
THORNBURG (MARAPOS) 1925/ (G) (see Rio Blanco Co.)	3N - 91W	4	Entrada/ Sundance	J		5,190,936					
WADDLE CREEK (O) 1964/	4N - 90W	4	Dakota	L.K.		3,375,611		A			
WEST SIDE CANAL (G) 1966/	12N - 92W	1	Niobrara	U.K.	413,336	10,496		1SI;3AL			
WILLIAMS FORK (O) 1962/	5N - 91W	1	Lance/ Lewis	U.K.		2,920,116		1SI			
			Shinarump Cng	Tri. Morrison Dakota Frontier Weber	51,271 J L.K. U.K. P-Perm.	4,671 259,633 30,326 29,456		TA DW 1SI TA			
WINTER VALLEY (G) 1958/	4N - 98W	2	Dakota Weber	L.K. P-Perm.	274,405 28,777	12,780,289 4,457		1SI;1AL			Recom. in Morrison 7/72. Recom. in Dak.
<u>RIO BLANCO COUNTY</u>											
BANTA RIDGE (O) 1972/	1S - 103W		Dakota	L.K.	1,484	12,378		4SI			
BAXTER PASS (G) 1958/ (see Garfield Co.)	4S - 103W	8	Dak./Morr.	U.J.-L.K.	1,106	1,086,205		2SI;6P			
BIG RIDGE 1981/	1S - 100W		Mancos 'B'	U.K.	1,106	1,089,629					No production recorded.
BLUE CLOUD (G) 1974/	4S - 102W	1	Dakota	L.K.		40,943		1P			
BOONDOCKS (G) 1977/	4S - 103W	4	Mancos	U.K.		582,503		4P			
CATHEDRAL (G) 1960/	3S - 100W	1	Dakota	L.K.		3,116					
		2	Emery	U.K.				1P			
		116	Mancos	U.K.	4,355	8,956,616		2P			
COLORROW GULCH (G) 1978/	3N - 97W	1	Frontier	U.K.		10,502	977	3SI;112P;1AL T.A.			
CORRAL CREEK (G) 1978/	1S - 100W	2	Shinarump	Tri.		375,673	20,902	1P			
DOUGLAS CREEK 1943/ (Unit) (G)	2S - 101W	1	Dakota	L.K.		63,662	68	2P			
	3S - 101W	16	Dak./Morr.	U.J.-L.K.		274,749	23	1P			
	2S - 102W		Mancos 'B'	U.K.		144,667	484	1SI;1P			
	3S - 102W		Dakota	L.K.		8,578,080		1P			
DOUGLAS CREEK-NORTH 1956/ (G)	1S - 101W	1	Mancos	U.K.		14,871,056		16P			
	1S - 102W	28	Weber	P-Perm.	24,328			1AL			
DOUGLAS CREEK-SOUTH 1963/ (G)	3S - 101W	8	Mancos 'B'	U.K.	142	7,775,165		2P			
	4S - 102W	6	Mancos 'A'	U.K.		15,320,839		6P;2SI			
			Morrison/	U.J.				6P			
DOUGLAS CREEK-WEST 1953/ (G)	2S - 103W	1	Dakota/	L.K.		1,592,923	216				
DRAGON TRAIL (G) 1959/	2S - 101W	110	Buckhorn	L.K.							
	2S - 102W		Niobrara	U.K.		68,637		1P			
	3S - 102W	8	Mancos	U.K.		756,868		8P			
	3S - 102W	2	Marapos	U.K.		178,715		2P			
DRAGON TRAIL-NORTH 1961/ (G)	1S - 101W	4	Emery 'B'	U.K.	337	20,980,370		12P			
EVACUATION CREEK (G) 1977/ (see Garfield Co.)	4S - 102W	7	Mancos 'B'	U.K.		99,702,198		5SI;10SP			
FAWN CREEK 1957/	3S - 98W		Mancos 'B'	U.K.		501,121		7P			
FOUNDATION CREEK 1973/ (G)	4S - 102W	1	Cedar Mtn.	L.K.	6,668	534,811		1P			
		1	Buckhorn	L.K.		133,937		1P			
		2	Dakota	L.K.		110,450		2P			
		16	Dak./Morr.	U.J.-L.K.		11,123		A			
HELLS HOLE CANYON (G) 1951/	2S - 103W	1	Mancos 'B'	U.K.	1,242,016		31	16P			
LOWER HORSE DRAW (Unit) 1960/ (G)	2S - 103W	47	Dakota	L.K.	6,668	2,091,620	31	A			
MISSOURI CREEK 1960/	3S - 102W					84,718					
NINE MILE (G) 1966/	2S - 92W	3	Castlegate	U.K.		369,048		1SI			
PHILADELPHIA CREEK 1975/ (G)	2S - 101W	42	Dakota	L.K.							
PICEANCE CREEK (Unit) 1930/ (G)	3S - 95W	13	Mancos 'B'	U.K.	2,976	43,158,729	22,577	34P;13SI			
	2S - 96W	2	Dakota	L.K.	65	1,593,010	313	2P			
	3S - 96W	1	Mesaverde	U.K.							
	2S - 97W	32	Douglas Crk	Tert.	450	51,431,363		1SI;11P			
		1	Mesaverde	U.K.		1,334,363		2P			
		3	Douglas Crk/	Tert.		340,389		1SI			
		3	Wasatch 'A'	Eocene							
		6	Wasatch 'A'	Eocene	67,453,004	7,207		1SI;31P			
		1	Wasatch 'D'	Eocene	366,400			1P			
		3	Wasatch 'F'	Eocene	97,090			3SI			
		3	Wasatch 'F&G'	Eocene	463,446	397		1SI;2P			
		6	Wasatch 'G'	Eocene	61,424,197	100,989		1SI;5P			

COUNTY FIELD NAME (Oil, Gas) Year Discovered/ Abandoned	GENERAL LOCATION Twp., Rge.	NO. WELLS PROD'G OR CAPABLE OF PROD'G	PRODUCING FORMATION OR ROCK UNIT	AGE	OIL(bbls)	GAS(Mcf)	CONDENSATE (bbls)	FIELD STATUS	WATER FLOOD (No. Wells)	GAS INJECTION (No.wells)	REMARKS
RIO BLANCO COUNTY (CONT.)											
PICEANCE CREEK-SOUTH 1964/ (G) 1964/ (G)	3S - 95W 3S - 96W	4	Douglas Crk	Tert.		2,219,798		3SI;1P			
PINNACLE (O) 1956/	3N - 86W	2	Shinarump Cng	Tri. Dakota Mesaverde Ft Union	199,806 991 3,102 251,532	17,938 57,991 16,354 1,016		2AL P&A 1969			Abd. 1969-1971
POWELL PARK (G) 1957/	1N - 95W		Wasatch	Eocene			189				Abd. 1966-1971
RANGELY (O) 1902/	1N - 101W 2N - 101W 1N - 102W 2N - 102W 2N - 103W	454	Weber Shinarump Cng Entrada Morrison Mancos/Dak.	P-Perm. Tri. J. J. U.K. U.K. U.K.	635,250,908 212,087 51,937 52,293 49,620 60 13,158,467	687,912,782 51,937 52,293 1,916,308 3,150 139,134		48SI;1P;405AL 263 P&A 8/63 P&A 10/61 4SI;1P 1SI 106SI;69AL			Inj. started 12/57-Weber Sd. Gas inj. 12/50 to 4/69.
ROCKY POINT (O) 1976/	2S - 100W	175	Mancos 'B'	U.K.	7,808	2,927		1AL			
SAGE BRUSH HILLS (G) 1978/	2S - 99W	2	Dak./Morr.	U.J.-L.K.		16,050					
		1	Mancos	U.K.		67,989					
SCANDAR DRAW 1958/	3S - 97W		Mv	U.K.		1,063		2SI			No production recorded.
SOLDIER CANYON (G) 1976/ (see Garfield Co.)	4S - 100W	2	Dakota	L.K.		54,250		2SI			
			FIELD TOTALS FOR RIO BLANCO & GARFIELD				200	107,392			
SULPHUR CREEK (G) 1955/	2S - 97W 2S - 98W 3S - 98W 2S - 99W	4 5 5 1	Mv Grp. Wasatch Green River/ Ft Union/Masatch	U.K. Eocene Eocene Pal./Eoc.	229 865 583 122	23,319 2,917,696 583 303		4SI 1SI;4P			
				Parachute/ Green River		23,852 6,551		1SI			
SULPHUR CREEK-SOUTH 1957/ (G)	3S - 99W	1	Wasatch G	Eocene		391,461		1SI			
			Parachute/ Green River	Eocene							
TEXAS MOUNTAIN (G) 1964/	3S - 102W	2	Dakota	L.K.		1,324,542		1SI;1P			
		1	Mancos/Castlegate	U.K.		467,661		1P			
		2	Maraposa	U.K.		2,387,545		2SI			
		2	Castlegate	U.K.		994,130		2P			
		6	Mancos	U.K.	61,118	3,136,902	35	1SI;4P;1AL			
			Dakota	L.K.		684,211		A			
THORNBURG (G)(MARAPOS) 3N - 91W 1925/1965 (see Moffat Co.)	FIELD TOTALS FOR RIO BLANCO & MOFFAT				753,686	15,659,041					
THUNDER (G) 1977/	4S - 102W	6	Dakota	L.K.		1,305,029		432			
TRAIL CANYON (G) 1969/ (see Garfield Co.)	4S - 101W	18	Mancos 'B'	U.K.		1,262,429		18P			
		18	Dakota	L.K.		3,572,690		3SI;15P			
		1	Dak./Morr.	U.J.-L.K.		2,132		1P			
		17	Mancos 'B'	U.K.	3,845	690,930	72	17P			
			Mancos 'B'	U.K.	3,845	4,499,465	72	1SI			
WHITE FACE BUTTE (G) 1978/	FIELD TOTALS FOR RIO BLANCO & GARFIELD	1									No production recorded.
WHITE RIVER (G) 1890/	1N - 97W 2N - 96W 2N - 97W	8 10	Mv Grp Wasatch	U.K. Eocene	11,076	1,318,612 490,755	5,225	3SI;5P 3SI;7P	DM		Abd. prior to 1960,no records; React. 1972.
WILLOW CREEK (G) 1956/	4S - 97W										No production recorded.
WILSON CREEK (O) 1938/	2N - 94W 3N - 94W	7 36	Sundance Morrison	J J	24,530,308 56,634,772	4,835,480 54,849,571		2SI;5AL 15AL;21SI	3 5	1	Inj. started 5/46 - Morrison. Inj. started 3/61 - Sundance.

APPENDIX 2. OCCURRENCE OF METHANE GAS IN UNTA REGION COAL MINES

MAP NO.	COUNTY (FIELD) MINE NAME	MINE LOCATION (Sec., Twp., Rge.) (Location of entry <u>underlined</u>)	NAME OF MINED BED	COAL BED THICKNESS (FT)	OVERBURDEN THICKNESS (FT) (U)=Unknown	COAL RANK(1)	DAILY PRODUCTION SHORT TONS (1st qtr., 1977)	AVERAGE METHANE EMISSION (CU.FT./DAY) (1st. qtr., 1977)	CU.FT.GAS/TON OF COAL MINED	OCCURRENCE OF GAS IN MINES(2) YEAR
<u>DELTA</u>										
1	(Somerset) Blue Ribbon	<u>2</u> , 13S-91W		6	(U)	B-hv	Closed			G
2	(Grand Mesa) Independent	<u>13</u> , 13S-95W	#2	6.2	100	B-hv	Closed			MF(1930)
3	(Somerset) King	9,10,11, <u>14</u> ,15,13S-91W	Uncorrelated	16	2000	B-hv				G MF(1911)
4	(Grand Mesa) Tomahawk	10, <u>15</u> ,16,13S-95W	Green Valley	11	(U)	B-hv	Closed			G
	(Grand Mesa) Orchard Valley Mine	24,13S-92W	"B"	27' avg.	450'-1800'	B	600	None	0	
<u>GARFIELD</u>										
1	(Grand Hogback) Black Raven	<u>16</u> ,5S-92W		22	D-257	B-hv	Closed			MF(1963)
2	Coryell	2,6S-91W,31,32,5S-90W	Allen	14.5	0-125	B-hv	Closed			GE(1901)
3	(Carbondale) Four Mile	<u>34</u> ,7S-89W	"A","C","D"	9.5	0-1100	B-hv	40		0	GE(1897)
4	(Grand Hogback) Harvey Gap (Old)	<u>24</u> ,5S-92W		6	(U)	B-hv	Closed			GE(1926)
5	Harvey Gap #2	19,5S-91W, <u>24</u> ,5S-92W	"F"	5-11	(U)	B-hv	Closed			G
6	Harvey Gap #3	<u>24</u> ,5S-92W		6	17-211	B-hv	Closed			G
7	IHI #3	<u>16</u> ,5S-92W		9	281-667	B	Closed			GE(1954)
8	McLearn	<u>12</u> ,5S-93W,7,5S-92W		6-7	(U)	B	Closed			G
9	New Castle	30,31,32,5S-90W 36,5S-91W,1-6S,91W	Wheeler	8-42	(U)	B-hv	Closed			GE(1901)MF(1954) DE(1888)
10	New Castle-Vulcan	<u>1</u> ,6S-91W	Allen	B-14	350-400	B-hv	Closed			MF(1962)
11	South Canon #1	<u>14</u> ,6S-90W	"D" Wheeler "E" Allen	18 (Ave.)	500-550	B-hv B-hv	Closed			GE(1912) MF(1951)
12	(Book Cliff) Stove Canon	<u>11</u> , <u>12</u> ,BS-102W	Palisade	3.2-7	300-700	B-hv	Closed			G
13	(Grand Hogback) Sunny Ridge	<u>24</u> ,5S-92W		7	140	B-hv	Closed			DE(1951)DE(1952)
14	Vulcan	<u>1</u> ,6S-91W	Allen	14-47	350-400	B	Closed			DE(1913)GE(1896) GG(1978)GE(1956)
15	Vulcan #3	<u>1</u> ,6S-91W			(U)		Closed			GE(1918)GE(1956)

GUNNISON

1	(Somerset) Bear	<u>9</u> ,16,13S-90W	Juanita "C"	8	290-1440	B-hv	600	259,000	431.6	G	
2	Black Beauty	<u>1</u> , <u>2</u> , <u>10</u> , <u>11</u> , <u>12</u> ,13S-90W	"E"	10	897	B-hv	Closed			G	
3	(Crested Butte) Crested Butte	<u>3</u> , <u>10</u> , <u>11</u> , <u>15</u> ,14S-86W	Crested Butte	5-25	300-400	B-hv	Closed			GE or OE(1883) GE(1884)	
4	(Somerset) Edwards	<u>8</u> , <u>17</u> ,13S-90W	"B" "C"	6 6	511-634 511-634	B-hv B-hv	Closed			G G	
5	(Carbondale) Center	<u>20</u> ,11S-88W		3.2-4.9	148-705	A	Closed			GE(1925)	
6	(Somerset) Oliver #2	<u>10</u> , <u>15</u> ,13S-90W	Oliver	7	(U)	B-hv	Closed			G	
7	Oliver #3	<u>10</u> ,13S-90W	"E"	7	174-500	B-hv	Closed			G	
8	Somerset	<u>8</u> , <u>9</u> ,13S-90W, <u>2</u> , <u>10</u> ,12S-90W	Var. B C	25 7	- 1000-1500 -	B-hv B-hv B-hv	4500	1,692,000	376	G G G	
9	(Somerset) Hawk's Nest West	12,13S-90W	"E"	8-9	1600-2000	hvB	800	425,000	531	.	
10	Hawk's Nest East	11,13S-90W	"E"	7-9	1600 max	hvB	150	29,000	193		
11	(Crested Butte) O.C. Mine #2	16,15S-86W	"C" Kubler	5.5-6.0	1800-2000	B	20	None	0		
	<u>MESA</u>										
1	(Book Cliffs) Cameo	<u>27</u> , <u>28</u> , <u>33</u> , <u>34</u> ,10S-98W	Cameo	6-9.5	2000	B-hv				G	
2	(Grand Mesa) Grandview	<u>11</u> ,11S-98W		4-5		B-hv	Closed			GE(1908)	
3	(Book Cliffs) McGinley	<u>5</u> ,9S-100W	Cameo	11	500	B-hv				G	
4	(Grand Mesa) Midwest	<u>10</u> , <u>11</u> ,11S-98W	Palisade	4.8	100	B	Closed			GE(1923)	
5	(Book Cliffs) Palisade	<u>3</u> , <u>4</u> , <u>5</u> ,11S-98W	Palisade	3-4	(U)	B-hv	Closed			MF(1900)	
	(Book Cliffs) C.M.C. Mine	34,10S-98W	Cameo "B"	7	< 1800	B-hv	300	24,000	80		
	<u>MOFFAT</u>										
1	(Danforth Hills) Red Wing	<u>34</u> , <u>35</u> , 4N-93W <u>2</u> , <u>3</u> -3N-93W	Collum	23	100-1000	B-hv	Closed			MF(1974)	

PITKIN

1	(Carbondale) Bear Creek	<u>21</u> ,10S-89W	Coal Basin "B"	7	200-1500	B-mv	480	885,000	492 1843.7	G
2	Coal Basin	5,8,10S-89W	Coal Basin "B" and "C"	6.9-8	150-600	B-mv	431	1,750,000	1821 4060.3	G
3	Dutch Creek #1	<u>17</u> ,10S-89W	Coal Basin "B"	7	0-2100	B-mv	642	2,235,000	2631 3481.3	GE(1965) DE(1957)
4	Dutch Creek #2	<u>17</u> ,10S-89W	Dutch Creek	7	1370-1800	B-mv	1008	1,489,000	867.7 1477.1	G
5	L.S. Wood	<u>8</u> ,10S-89W	Coal Basin "B"	7	0-1650	B-mv	1800	1,867,000	2087 1037.2	G
6	Placita (Old)	<u>6</u> ,11S-88W		3.4	200?	B	Closed			GE(1923)
7	Spring Gulch	15, <u>22</u> ,23,26,27-8S-89W	Anderson Allen	4.5-6 8-11.5	0-1000	B	Closed			DE(1901)
8	Thompson Creek #1	<u>34</u> ,35,8S-89W	"A" "B"	8 8	300+ <u>300+</u>	B-hv B-hv	113	18,000	159.2	GE(1956)
9	Thompson Creek #2	<u>34</u> ,35,8S-89W	"A" & "B"	7	80-100	B-hv	Closed			G
10	Thompson Creek #3	<u>34</u> ,8S-89W	Sunshine	9	(U)	B-hv	?	None		G

RIO BLANCO

1	(Lower White River) White River	2,10,11,2N-101W		7.8	(U)	B-hv	Closed		G
---	------------------------------------	-----------------	--	-----	-----	------	--------	--	---

(1) A - anthracite
 B - bituminous
 SB - subbituminous
 hv - high-volatile
 mv - medium-volatile
 lv - low-volatile

(2) G - gassy mine
 GE - gas explosion
 GS - gas suffocation
 DE - dust explosion (methane related?)
 MF - mine fire

Note: Numerous minor mine explosions are not listed.

APPENDIX 3 - Coal Bed Methane Shows

1. Production Tests in Sandstones in Coal Bearing Zones

22-1N-95W, Michigan Wisconsin Pipeline, 1 HD Lake

"Prod. Zone: Mesaverde 8428-9136 (gross)."

"Int. Prod.: IPF (est) 88 B0, 1BW, 246 MCFGPD, gty 44."

"Perf.: 8428-42, 8452-56, 9112-26, 9130-36 w/1 pf."

(6' coal @ 8463', 4' coal @ 8472', 10' coals @ 8485' & 8496').)

20-2N-96W, Fuel Resources Development, 6-M Federal

"Prod. Zone: Mesaverde 6170-6852 (gross)."

"Int. Prod.: IPF 3681 MCFGPD, 32/64" ck."

"Perf.: 6170-78, 6245-60, 6382-93, 6455-62, 6744-58,

6846-52 w/2 pf., 6739-44 w/4pf."

(5' coal @ 6297', 7' coal @ 6338', 3' coal @ 6357', 6' coal @ 6670')

28-2N-96W, Fuel Resources Development, 1 Unit

"Prod. Zone: Mesaverde 6040-6932 (gross)."

"Int. Prod.: IPF 5460 MCFGPD."

"Perf.: 6040-47, 6191-6200, 6816-22, 6924-32."

(5' coal @ 6354', 12' coal @ 6411', 4' coal @ 6576', 3' coals @ 6723',
6841', 6881', 5' coal @ 6891').)

29-2N-96W, Fuel Resources Development, 3-M Federal-White River Dome Unit

"Prod. Zone: Mesaverde 6176-7392 (gross)."

"Int. Prod.: IPF 475 MCFGPD, 28/64" ck (natural)."

"Perf.: 6176-94, 6214-22, 6754-60, 6822-32, 6950-58, 7136-44, 7221-25,
7300-12, 7366-92, w/2 pf."

(5' coal @ 6488', 8' coal @ 6504', 5' coal @ 6603', 3' @ 6611',
18' coal @ 6667', 3' coal @ 6710').)

31-2N-96W, Fuel Resources Development, 1 Govt.

"Prod. Zone: Mesaverde 5284-6950."

"Int. Prod.: IPF 1100 MCFGPD, 3/4" ck, FTP 90#."

"Perf.: 5284-5307, 5464-72, 5489-99, 5600-04, 5652-74, 5708-12,
5760-90, 5890-94, 5996-6000, 6218-32, 6352-64, 6662-66, 6758-62,
6774-78, 6933-50, 7180-7204, 7295-7330, w/1 pf."

(6' coal @ 5556', 5592', & 6107', 8' coal @ 6118', 4' coal @ 6184',
5' coals @ 6205' & 6238', 19' coal @ 6263', 3' coal @ 6306',
4' coals @ 6545', 4' coal @ 7240').)

26-2N-97W, Cities Service Oil, 4 Federal-A

"Prod. Zone: Mesaverde 5385-6764 (gross)."

"Int. Prod.: IPF 1160 MCFGPD, 1" ck TP 230#, CP 390#."

"Perf.: 5786-5806, 5872-81, 5928-46, 5558-5606, 5385-97, 6124-30,
6460-6506, 6592-96, 6612-18, 6624-38, 6720-28, 6740-64."

(3' coal @ 4545', 2' coal @ 6086', 3' coal @ 6089', 4' coal @ 6110',
3' coals @ 6249', 4' coals @ 6407', 3' coal @ 6432').)

- 26-2N-97W, Cities Service Oil, 5 Federal-5
"Prod. Zone: Mesaverde 5268-6145 (gross).":
"Int. Prod." IPF 536 MCFGPD."
"Perf.": 5268-77, 5357-62, 5411-16, 5517-35, 5844-50, 5964-74,
6078-83, 6100-05, 6136-45."
(4' coal @ 5351', 3' coal @ 5404', 6' coal @ 6042', 4' coal @ 6050',
6' coal @ 6116'.)
- 14-7S-95W, Southern Union Production, 14-95 Federal
"Prod. Zone: Mesaverde 6009-8794."
"Int. Prod.: IPF 2610 MCFGPD, 3/4" ck, SITP 2220#."
"Perf.: 5994-6002, 6009-6013, 6039-6058, 6136-6152, 6194-6220,
6311-6329, 6335-6340, 6346-6362, 6421-6429 w/2 pf., 6676-6702,
6946-6958, 6982-6988, 7250-7270, 7355-7364, 7471-7481,
7520-7543 w/2 pf., 8428-8470, 8484-8492, 8535-8557 w/2 pf., 8450-8454,
8536-8540 w/ 3 pf., 8680-8690, 8720-8782, 8788-8794 w/2 pf."
(10' coal @ 7786', 11' coal @ 7734', 4' coal @ 8026', 4' coal @ 8016',
3' coal @ 8522', 3' coal @ 8665', 4' coal @ 8692', 2' coal @ 8702').
- 14-9S-93W, Union Oil, 2 Govt.
"Prod. Zone: Mesaverde 6774-7245."
"Int. Prod.: 942 MCFGPD from perfs 6774-6812; 2980 MCFGPD from
perfs 7216-7245."
"Perf.: 6768, 6774, 6797, 6806, 7216, 7224, 7245, 3 holes at each
depth."
(3' coal @ 6869', 3' coal @ 6827', 8' coal @ 7152').
- 29-9S-94W, Fred W. Pool, 1 Clyde-Govt.
"Prod. Zone: Mesaverde 4687-5682."
"Int. Prod.: IPF 1830 MCFGPD."
"Perf.: 4687-5682 (gross)."
(4' coal @ 5365', 6' coal @ 5430', 2' coal @ 5550' and 4' coal @ 5554',
18' coal @ 5620').
- 24-9S-95W, Fred W. Pool, 1 Donnor
"Prod. Zone: Mesaverde 4638-5495."
"Int. Prod.: IPF 950 MCFGPD.:
"Perf.: 4638-5495." "1 shot @ intervals, 51 shot total."
(6' coal @ 5216', 12' coal @ 5306', 3' coal @ 5350', 13' coal @ 5397',
5' coal @ 5472').
- 36-9S-95W, Teton; Wacker Oil, 1 Garner
"Prod. Zone: Mesaverde 4187-4934."
"Int. Prod.: IPF 396 MCFGPD, 3/4" ck, SICP 630#."
"Perf.: 4490-4569, 4187-4248, 4594-4934 (gross) w/1 pf."
(3' coal @ 4811', 6' coal @ 4830', 21' coal @ 4877', 6' coal @ 4935',
3' coal @ 4949', 8' coal @ 4974').
- 19-9S-94W, Fred W. Pool, 1 Hudson
"Prod. Zone: Mesaverde 4643-5556."
"Int. Prod.: IPF 900 MCFGPD."
"Perf.: 4643-5556." "1 shot @ intervals, 36 holes total."
(5' coal @ 5250', 6' coal @ 5337', 11' coal @ 5428').

11-10S-94W, Fred W. Pool, 1 Robbins
"Prod. Zone: Mesaverde 5480-6587."
"Int. Prod.: IPF 2300 MCFGPD, open ck."
"Perf.: 5480-5598, 5600-5796, 5938-6587 (gross) w/1 pf."
"57 shots total."
(6' coal @ 6310', 10' coal @ 6357', 13' coal @ 6437', 26' coal @ 6546'.)

9-11S-90W, Fred W. Pool, 1 Henderson
"Prod. Zone: Mesaverde 3982-4154."
"Int. Prod.: IPF 1200 MCFGPD, open ck."
"Perf.: 3982-3986, 4134-4138, 4150-4154 w/1 pf."
(3' coal @ 4029', 6' coal @ 4037').)

2. Drill Stem Tests of Zones Containing Coal

22-1N-95W, Michigan Wisconsin Pipeline, 1 HD Lake

"DST 7850 - 90, op 15, SI 90, op 90, SI 180, rec 1890 mud, 720 GCM,
FP 257#, 574#, SIP 350-2214, 816-1581, HP 3389-3426#."
(11' coal @ 7857').)

35-2N-97W, Trend Exploration, 1-35 Parker Unit
"DST 5530-5741, op 10 mins., SI 1 hr, op 1 hr, SI 180 min.,
rec. .92 bbls SGCM, .59 bbls VHGCM, FP 82-123, 136-139#, SIP 1090, 959,
HP 2694-2680#." (3' coal @ 5670', 5' coal @ 5707').)

27-3N-97W, E. M. Leverson, 1"A" Coyote Basin
"DST 4506-62, 15 min, rec 30' GCM, FP 0#, SIP 25#, HP 2250#."
(3' coal @ 4508').)

32-2S-99W, American Minerals, 3 Ryan Creek-Govt.
"DST 6841-95, op 60 mins., strong blow throughout, trace GTS in 55
mins., SI 90 mins., rec 1170 HGCM, FP 576, -617#, FSIP 2828#,
HP 3550-3139#."
(22' coal @ 6851').)

7-6S-100W, Chorney Oil, 1-7 Chorney-Rowan Creek
"DST 2690-2808, op 10, SI 30, op 45, SI 90, rec 90 VSGCM,
FP 5-8, 8-8, SIP 8-49, 8-42, HP 1103-1181."
(3' coal @ 2724', 5' coal @ 2729', 5' coal @ 2757', 3' coal @ 2804').)
"DST 2914-2983, op 10, SI 30, op 45, SI 90, rec 70 SG & WCM.
FP 36-41, 74-74, SIP 41-680, 74-353, HP 1369-1369."
(5' coal @ 2928').)
"DST 3158-3227, op 15, SI 30, op 45, SI 90, rec 90 SGCM, FP
90-95, 99-106, SIP 95-786, 106-828, HP 1572-1572."
(4' coal @ 3162').)

6-7S-99W, El Paso Natural Gas, 1 Standard Shale
"DST 5392-5532, ISI 20 min., op 40 min., strong blow, dead in 30 min.,
no GTS, SI 30 mins., rec 120 sli GC & WCM, FP 45-65#, SIP 414-130#,
HP 2639#."
(17' coal @ 5389', 4' coal @ 5470', 4' coal @ 5487', 8' coal @ 5516',
4' coal @ 5526').)

28-9S-91W, Mountain States Drilling, 28-1 Govt.
"DST 7190-7217, 1 hr, gas in 7 min, rec 15 mud, FP 69-164#, SIP (30 min) 204#, HP 3835#.
(8' coal @ 7192')."
"DST 7251-7308, 30 min, gas in 23 min, rec 93 mud, FP 150-360#, SIP (30 min) 2582#, HP 3689."
(4' coal @ 7258.).

10-10S-93W, Exxon Corp., 3 Vega Unit
DST 7585-7658, flow rate of 80 MCFD.
(14' coal @ 7598', 28' coal @ 7625').
Extrapolated maximum reservoir pressure 1892-1273#.

26-10S-96W, Scott Hammonds, Blanco Oil, 26-1 Moran-Govt.
DST 3124-3145, open 1 1/2 hrs, SI 45 mins, gas in 4 mins, too small to measure, rec 100 sli GCM, FP 63-72#, FSIP 210#.
(19' coal @ 3124').

27-10S-96W, Norris Oil, 27-2 Moran-Govt.
DST 2938-63, SI 30 min, open 90 min, SI 2 hr, rec 10' mud, FP 14-14#, SIP 120-158#, HP 1315-1315#.
(14' coal @ 2936').

1-10S-97W, McCulloch Oil of California, 1 Williams
"DST 3110-3224, op 1 hr weak steady blow thruout, SI 20 mins., rec 175 sli GCM, FP 95-120#, SIP (20 min) 260#, HP 1610-1590#."
(3' coal @ 3147', 3' coal @ 3152').

7-10S-97W, Big Horn Powder River Corp., 1-A Federal
"DST 2205-2306, SI 30 mins, open 3 hrs, SI 30 mins, gas in 3 min, too small to gauge, 3 to 4 ft flare, no rec, FP 38-76#, SIP 706-629#, HP 1158-1150#."
(4' coal @ 2222', 6' coal @ 2240').

23-10S-97W, Adolph Coors, Nichols 1-23CM
"DST 2708-2723, op 10 mins, SI 60 mins, op 60 mins, SI 4 hr, rec. 2' of borehole fluid no blow, FP 8.1-8.1, SIP 13.5-13.5, HP 1187.1-1173.8 (11' coal @ 2715')."
"DST 2754-2769.5, op 10 mins, SI 60 mins, op 60 mins, SI 2 hr, rec a very small blow of gas and 40' of borehole fluid, FP 13.5-26.9, SIP 120.7-93.9, HP 1240.1-1226.8."
(3' coal @ 2754')

34-11S-94W, Apache Oil, 2 Mickelson-Govt.
"DST 6155-6225, 1 1/2 hrs, rec 90 mud, FP20-40#, SIP (30 min) 190#, HP 2720#."
(42' coal @ 6156', 8' coal @ 6214').

17-12S-89W, Delhi-Taylor Oil, 1 McLaughlin-Govt.
"DST 1870-1923, open 1 hr, gas in 5 min, too small to measure, rec 30 mud, FP 15-15#, SIP (20 min) 190#."
(3' coal @ 1889')."
"DST 1870-2012, open 3 1/2 hrs, gas in 2 hrs, too small to measure, rec 95 mud, FP 45-45#, SIP (30 min) 145#."
(3' coal @ 1889')."
"DST 2148-2154, open 2 hrs, rec 20 mud, FP 38-50#, SIP (30 min) 75#."
(17' coal @ 2140').

3. Mud Log Shows in Coal

6-1N-100W, Charney Oil, 1-6 Govt
12-1N-99W, Pacific Transmission Supply Co., Barcus Creek Fed 22-12
17-2N-94W, Husky-Belco, 16-17 Bailey
25-1S-100W, David M. Munson, 25-1-100 Jerry Chambers
20-3S-100W, Utex, 1 Cathedral
34-6S-94W, CER MWX-1
17-7S-90W, Dome Petroleum, Dome Baldy Creek Unit #1-17
33-7S-100W, Dyce Petroleum, 33-1 Federal
2-7S-101W, Dyco Petroleum, 2-1, Fuelco Federal
15-7S-101W, Dyco Petroleum, 15-1 Albertson
19-8S-95W, Teton Energy Co., Knox 19-1
25-8S-97W, Teton Energy, 1 Fee
25-8S-98W, Teton Energy, 25-4 Federal
25-8S-98W, Teton Energy, 25-3 Govt
26-8S-98W, Teton Energy, 26-3 Federal
26-8S-98W, Teton Energy, 26-4 Federal
35-8S-98W, Teton Energy, 35-2 Federal
6-8S-100W, Dyco Petroleum, 6-3 Mesagar Federal
5-9S-90W, Rainbow Resources, 1-5 Federal-Divide Creek
23-10S-95W, Teton Energy, 23-2 Walck
8-13S-89W, Kd Drilling Co.-Mile High Oil Co. & Feldt-Robinson, 1 Terre II

4. Production Tests in Mixed Sandstone and Coals

15-6S-94W, Northwest Exploration, 6 McNary
"Prod. Zone: Mesaverde
"Int. Prod." 484 MCFGPD."
"Perf." 6789, 6965, 6995, 7003, 7027, 7055, 7108, 7134, 7153, 7164,
7196, 7288, 7305, 7456, 7510, 7530, 7544, 7572, 7604, 7643, 7663,
7691, 7698 w/1 pf."
(6' coal @ 7506', 4' coal @ 7542').)

23-6S-102W, American Resources Management, 23-1
"Prod. Zone: Mesaverde 550-684, 708-748."
"Int. Prod." SI TSTM."
"Perf.: 550, 551, 552, 553, 554, 679, 680, 681, 682, 683, 684, 708,
711, 713, 715, 717, 738, 740, 742, 744, 746, 748."
(6' coal @ 734')

27-7S-91W, Piute Energy, 6-27-7-91 Federal,
"Init. Prod.: 404.5 MCFD."
"Perf.: 6980-90, 6665-78, 6060-6057, 4991-4998, 5002-5005, 4962-4969
with 1 shot per foot."
(7' coal @ 4991.)

9-7S-93W, Chevron Oil, #1 (22-9) Skonberg
"Prod. Zone: Mesaverde (open hole) 6839-8741."
"Init. Prod.: IPF 350 MCFGPD (natural)."
(8' coal @ 8496', 3' coal @ 8616')

28-7S-95W, Southern Union Production, #28-95 Federal
"Perf.: 5084, 5096, 5270, 5281, 5306, 5513, 5523, 5538, 5691, 5701,
5714, 5773, 5797, 5857, 5871, 5906, 5952, 6061, 6073, 6082, 6125,
6244, 6252, 6297, 6313, 6340, 6360, 6375, 6385, 6393, 6425, 6441,
6550, 6714, 6722, 6797, 6859, 6870, 6913, 6977, 7149, 7161, 7173,
7182, 7189, 7213 w/1 shot each. Sdfract. Flowed 3750 MCFGPD."
(5' coal @ 6796')

33-9S-94W, Fred W. Pool; Walker Oil, 1 Hawkins
"Prod. Zone: Mesaverde 4907-5695."
"Int. Prod." IPF 188 MCFGPD."
Perf.: 4907, 4910, 5015, 5018, 5021, 5023, 5027, 5030, 5033, 5037,
5040, 5045, 5047, 5088, 5092, 5261, 5263, 5267, 5269, 5275, 5414,
5461, 5513, 5554, 5585, 5634, 5663, 5695 w/1 pf.
(16' coal @ 5688').)

5. Production Tests in Coal Beds

13-3S-101W, Twin Arrow, C & K #1-13
"Perf.: 573-581, 627-665, 726-736, 801-810, 1 shot per foot. Acid
treated with 500 gal. 7.5% HF. Swabbed dry. No pressure, no flow
through 1/8" orifice."
(2' coal @ 575', 4' coal @ 628', 5' coal @ 661', 3' coal @ 726',
4' coal @ 732', 10' coal @ 801').)

16-4S-103W, Coseka Resources Federal 1-16
"While being drilled with air-mist, 108 MCFD was produced from a
Mesaverde coal zone between 1166 and 1192 feet."
"Perf.: 2 pf from 1170-1174 & 1186-1191. Fract. w/ 580 gal 15% acid
& 10,500 gal foam w/ 28,500# 20-40 sd and 4000 barrels 100 mesh sd.
Prod. for 75 days @ average rate of 9.2 MCFGD & 8.6 BWD."
(9' coal @ 1167', 10' coal @ 1184').)

16-6S-90W, Snyder Oil, 1-16 Snyder Parton Porter
"Perf.: (Cameo) 6572-6600 fract w/ 35,238 gal wtr, 24,700 40/70 sd."
"Prod." 1MCFGPD, 110 BW.

23-6S-90W, Rio Colorado Oil and Gas, 1 Cactus Valley 23-6-90
"Perf.: 2440-2550, 2740-3320, 3868-4130. Foam fract."
"Well pumping approximately 4 BWD and flowing 4 MCFD from the
perforated coal seams."

34-9S-93W, Exxon Corp., 2 Vega Unit
"Perf.: 7847-7851, 7863-7867, 7985-8007, 8046-8052. IPF 440 MCFGPD,
109 BWPD, 64/64" ck."
(8' coal @ 7845', 19' coal @ 7862', 25' coal @ 7984', 8' coal @ 8044').)

35-9S-93W, Exxon Corp., 4 Vega Unit
"Perf.: 7956-7968, 8050-8078 w/1 p2f. IPF 140 MCFGPD, 706 BWPD,
20/64" ck."
(15' coal @ 7954', 30' coal @ 8049').)

24-10S-97W, Adolph Coors Nichols 1-24


"Perf.: 2625-2633 w/ 4 holes per foot."

"Foam fraced with 52,500 gallons of 75% nitrogen foam & 49,000 lbs of sand. After flowing back well and swabbing frac fluid and nitrogen, well failed to produce methane in any economical production rate. Small quantities of gas were observed, but flow fell off to zero in 5-10 minutes."

20-12S-92W, Amoco Production Company, #1 Green Mountain Unit
tight hole, "proposed coal degasification test of Rollins Coal."

APPENDIX 4
THE U.S. BUREAU OF MINES DIRECT METHOD

In this method, a coal core sample (approximately 2 lbs in weight) is sealed in an airtight plastic or aluminum cannister and the gas it emits (desorbs) is measured by water displacement in an inverted graduated cylinder (see Figure 10). The coal sample is weighed so its gas content can be stated in cc/g (cubic centimeters/gram) or cf/t. Gas lost by the sample before it is sealed in the cannister can be estimated using a back calculation method. Gas remaining in the structure of the coal sample after natural desorption ceases is measured by crushing the sample in a sealed ball mill and again using water displacement. The desorbed, lost, and remaining gas are all added to give the total gas content. Diamond and Levine (1981) describe the direct method in greater detail.

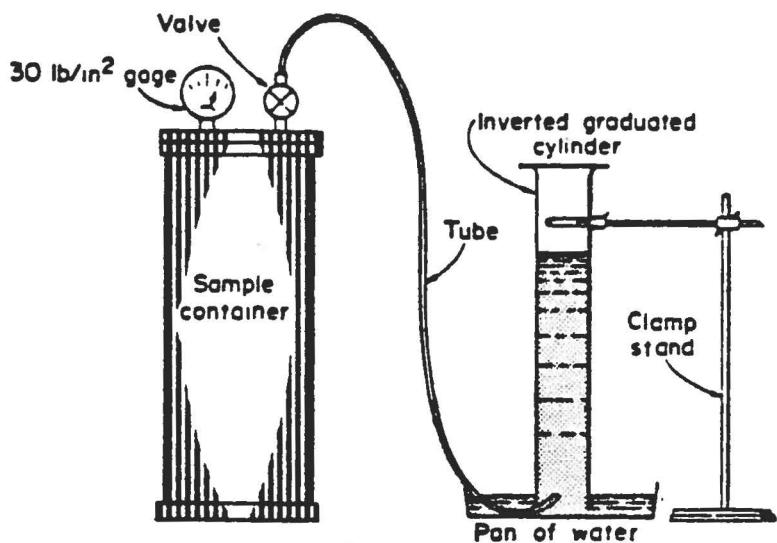

U.S. Bureau of Mines equipment for direct method desorption of coal samples (after Diamond and Levine, 1981, p. 6).

APPENDIX 5. Unita Region Desorption Data

PART 1--COLORADO GEOLOGICAL SURVEY DATA

CGS NO.	LOCATION (Sec., Twp., Rge.)	FORMATION NAME	DEPTH TO COAL BED (ft)	BED THICKNESS (ft)	TOTAL GAS (cc/g)	(cf/t)	APPARENT RANK OF COAL	% METHANE IN GAS	HEATING VALUE OF GAS (Btu/cf)
11	16-2N-93W	Williams Fork	2216	15	.50	16 1	--	2	
12	"	Williams Fork	2243	4	1.31	42	--		
13	21-2M-93W	Williams Fork	2122	12	.98	31	--		
14	"	Williams Fork	2106	8	.10	3	--		
15	23-2N-93W	Williams Fork	48.7	10.8	0	0	hvCb		
16	21-2N-93W	Williams Fork	502.6	12	0	0	hvCb		
17	24-135-92W	Williams Fork	504	5.8	.19	6	hvCb		
18	8-135-95W	Williams Fork	706.7	7.6	5.62	179	hvCb		
19	"	Williams Fork	706.7	7.6	.82	26	hvCb		
20	17-10S-89W	Williams Fork	1500	8.7	1.7 3	54	mvb		
21	"	Williams Fork	1300-1500	25	.215 3	7	mvb		
22	"	Williams Fork	2000	20	.22 3	7	mvb		
23	24-135-93W	Mesaverde Gp. ⁴	992.5	14.5	.46	15	hvCb		
24	34-135-96W	Mesaverde Gp.	579	4.5	0	0	hvCb		
25	13-10S-98W	Mesaverde Gp.	809	5.5	2.5	80	hvAb		
26	"	Mesaverde Gp.	1284.5	3.5	7	223	hvAb		
61	18-4N-94W	Williams Fork	144	13	0.36	12	subA-hvCb		
62	"	Williams Fork	144	13	0.39	13	subA-hvCb		
63	"	Williams Fork	163.5	19.5	0.24	8	subA-hvCb		
64	"	Williams Fork	287.5	4.3	0.15	5	subA-hvCb		
65	"	Williams Fork	294.8	20.7	0.116	4	subA-hvCb		
66	28-3S-101W	Mesaverde Gp.	1588	3	0.667	21	hvBb		
67	"	Mesaverde Gp.	1607	3	0.489	16	hvBb		
73	14-3S-101W	Mesaverde Gp.	685.2	.4	3.58	115	shale		
74	"	Mesaverde Gp.	698.1	.35	6.68	214	shale		
75	"	Mesaverde Gp.	772.35	.6	1.45	126	siltstone		
76	"	Mesaverde Gp.	770.88	.57	0.76	66	shale		
77	"	Mesaverde Gp.	759.2	.8	2.69	156	hvBb		
78	"	Mesaverde Gp.	809.3	.4	7.61	243	hvBb		
79	"	Mesaverde Gp.	835 ?	4.7	2.76	130	hvBb		
80	"	Mesaverde Gp.	835 ?	4.7	4.31	138	hvBb		
81	"	Mesaverde Gp.	962 ?	7.8	3.47	111	hvBb		
96	11-13S-90W	Williams Fork	873	4.8	2.49	80	hvBb		
97	"	Williams Fork	896	6.1	3.2	102	hvAb		
98	"	Williams Fork	905	1.6	3.74	120	hvAb		
99	"	Williams Fork	948	2.9	3.88	124	hvAb		
100	"	Williams Fork	1133	6.7	0.28	9	hvAb		
101	"	Williams Fork	1133	6.7	6.81	218	hvAb		
102	"	Williams Fork	1187	14	5.82	186	hvAb		
103	"	Williams Fork	1187	14	5.94	190	hvAb		
104	"	Williams Fork	1207	6.8	6.15	197	hvAb		
105	"	Williams Fork	1227	1.2	3.72	119	hvAb		
106	"	Williams Fork	782	13	6.06	194	hvAb		
107	"	Williams Fork	782	13	6.77	217	hvAb		
108	"	Williams Fork	719	6	6.62	212	hvAb		
109	"	Williams Fork	1182	6.9	5.70	182	hvAb		
110	"	Williams Fork	1236	12.7	5.93	190	hvAb		
111	"	Williams Fork	1260	5.3	6.53	209	hvAb		
112	1-13S-90W	Williams Fork	1516	12	3.16	101	hvAb		
113	"	Williams Fork	1583	8	3.36	108	hvAb		
114	"	Williams Fork	1583	8	4.12	132	hvAb		
115	"	Williams Fork	1783	12	5.42	173	hvAb		
116	"	Williams Fork	1783	12	2.99	96	hvAb		
117	"	Williams Fork	1830	14.65	6.10	195	hvAb		
118	"	Williams Fork	1830	14.65	5.53	177	hvAb		
119	"	Williams Fork	1854	6.7	5.98	191	hvAb		
120	"	Williams Fork	1854	6.7	7.66	245	hvAb		
123	36-3N-101W	Mesaverde Gp.	1324.68	1.17	2.04	65	hvCb		
124	"	Mesaverde Gp.	1330.6	8.21	2.25	72	hvCb	(47.63) 5	
125	"	Mesaverde Gp.	1330.6	8.21	2.19	70	hvCb	(33.11)	
126	"	Mesaverde Gp.	1330.6	8.21	2.06	66	hvCb		
127	"	Mesaverde Gp.	1349.75	2.05	1.81	58	hvCb	(49.51)	
128	1-2N-101W	Mesaverde Gp.	741.75	6.43	0.64	20	hvCb		
129	"	Mesaverde Gp.	758.71	6.43	2.05	80	hvCb		
130	"	Mesaverde Gp.	758.71	2.22	2.25	72	hvCb		
131	"	Mesaverde Gp.	764.92	5.08	2.50	80	hvCb	(57.66) 58.6	610
132	"	Mesaverde Gp.	770	2.5	2.79	89	hvCb	(46.10) 49.2	506
133	"	Mesaverde Gp.	794.65	2.15	2.34	74	hvCb	(38.27) 39.3	403
134	"	Mesaverde Gp.	797.5	4.0	2.23	71	hvCb	(38.27) 37.8	388
135	"	Mesaverde Gp.	805.8	5.37	1.35	43	hvCb		
140	10-10S-93W	Mesaverde Gp.	7598	18	13.69	438	mvb	(82.99) 82.1	942
141	"	Mesaverde Gp.	7598	18	11.90	381	lvb	(79.63) 85.9,	854,960
142	26-3S-101W	Mesaverde Gp.	1148.9	8	1.11	36	hvCb		
143	"	Mesaverde Gp.	1148.9	8	0.76	24	hvBb		
144	"	Mesaverde Gp.	1207	8.7	0.92	29	hvBb		
145	"	Mesaverde Gp.	1207	8.7	0.64	20	hvBb		
146	"	Mesaverde Gp.	1223	2	0.95	30	hvBb		
147	29-3N-101W	Mesaverde Gp.	878.75	.4	0.03	1	shale		
148	"	Mesaverde Gp.	879	3.3	0.29	9	hvCb		
149	"	Mesaverde Gp.	892.72	8.8	0.02	1	siltstone		
150	"	Mesaverde Gp.	898.45	8.8	0.02	1	hvCb		
151	"	Mesaverde Gp.	904.3	7.7	0.13	4	hvCb		
152	"	Mesaverde Gp.	904.3	7.7	0.20	6	hvCb		
153	"	Mesaverde Gp.	912.4	.95	0.01	0	shale		
154	35-3N-101W	Mesaverde Gp.	1186.5	1.88	0.02	1	sandstone		
155	"	Mesaverde Gp.	1190.96	2.74	0.03	1	shale		
156	"	Mesaverde Gp.	1197.15	3.05	0.03	1	siltstone		
157	"	Mesaverde Gp.	1197.35	3.05	1.32	42	hvCb		
158	"	Mesaverde Gp.	1198.65	8.4	1.19	38	hvCb		
159	"	Mesaverde Gp.	1208.34	1.32	0.01	0	siltstone		
160	"	Mesaverde Gp.	1187.7	3.5	0.97	31	hvCb		
184	23-1S-100W	Green River	795.3	?	0.17	5	oil shale		
185	"	Green River	1189.7	?	0.65	21	oil shale		
186	13-6S-94W	Williams Fork	7445	1	4.28	137	carb. shale		
187	"	Williams Fork	7476.5	1	1.81	58	carb. shale		
188	10-7S-104W	Williams Fork	292	2.5	.16	5	hvBb		
189	"	Williams Fork	292	2.5	.08	3	hvBb		
190	"	Williams Fork	299.5	4.6	.07	2	hvBb		
191	"	Williams Fork	303.9	6.8	0.0	0	hvBb		
192	"	Williams Fork	303.9	6.8	.02	1	hvBb		
193	"	Williams Fork	307.5	6.8	.12	4	hvBb		
194	31-2S-99W	Green River	1147.8	?	.69	22	oil shale		
195	"	Green River	1546.7	?	.40	13	oil shale		
199	19-2S-99W	Green River	1276.2	?	0.0	0	oil shale		
200	"	Green River	1485.6	?	.17	5	oil shale		
201	24-2S-100W	Green River	936.3	?	.32	10	oil shale	(85.91)	
202	9-11S-93W	Mesaverde Gp.	6945	1	3.55	114	carb. shale	(79.94, 77.38)	
203	34-6S-94W	Mesaverde Gp.	6826.9	?	.58	18 6	lvb		

1. total gas in cubic feet per ton not standard cubic feet per ton

2. blanks indicate gas analyses not run

3. mine samples; gas contents probably higher

4. Gp. = group

5. heating value not measured if methane percentage in parentheses

6. sample desorbed for a month before put in canister

PART 2--OTHER AVAILABLE DATA

USBM NO.	TETON ENERGY WELLS 23-2	FORMATION NAME	DEPTH TO COAL BED (ft)	BED THICKNESS (ft)	TOTAL GAS (cc/g)	TOTAL GAS (cf/t)	APPARENT RANK OF COAL
1600	23-105-95W	Mesaverde Gp.	4688	13	1.7	54	coal + shale
1601	"	Mesaverde Gp.	4730	8	1.2	38	shale
1602	"	Mesaverde Gp.	4730	8	3.7	118	shale
1603	"	Mesaverde Gp.	4740	4.5	0.3	10	shale
1604	"	Mesaverde Gp.	4752	12	6.2	198	carb. shale
1605	"	Mesaverde Gp.	4752	12	10.0	320	hvAb
1606	"	Mesaverde Gp.	4752	12	5.0	160	coal cuttings
1607	"	Mesaverde Gp.	4752	12	6.0	192	shale + coal
1608	"	Mesaverde Gp.	4802	12	9.9	317	hvAb
1609	"	Mesaverde Gp.	4802	12	9.3	298	hvAb
1610	"	Mesaverde Gp.	4802	12	10.2	326	hvAb

TRW NO.	DOE MWX-2	FORMATION NAME	CORE INTERVAL	TOTAL GAS (cc/g)	TOTAL GAS (cf/t)	RANK OF COAL
1	34-65-94W	Mesaverde Gp.	7203.7-7204.2	9.90	317	lvb 2
2	"	Mesaverde Gp.	7224.4-7224.7	10.50	336	lvb
3	"	Mesaverde Gp.	7229.5-7229.8	3.58	125 3	lvb
4	"	Mesaverde Gp.	7234-7236, 7238-7242	0.29	9	cuttings
5	"	Mesaverde Gp.	7234.6-7234.9	8.94	286	lvb
6	"	Mesaverde Gp.	7374-7386	2.06	65	cuttings
7	"	Mesaverde Gp.	7374-7386	0.45	14	cuttings
8	"	Mesaverde Gp.	7374-7386	0.45	14	cuttings
9	"	Mesaverde Gp.	7375.8-7376.1	8.64	303	lvb
10	"	Mesaverde Gp.	7380.3-7380.6	8.71	279	lvb
11	"	Mesaverde Gp.	7384.3-7384.6	8.43	295	lvb

USBM NO.	LOCATION (Sec., Twp., Rge.)	FORMATION NAME	DEPTH TO COAL BED (ft)	BED THICKNESS (ft)	TOTAL GAS (cc/g)	TOTAL GAS (cf/t)	APPARENT RANK OF COAL
Rio Colorado Cactus Valley 4							
1029	23-65-90W	Mesaverde Gp.	3316	?	6.6	211 ?	hvAb
1036	"	Mesaverde Gp.	3880	?	12.6	403	hvAb
1028	"	Mesaverde Gp.	3312	?	11.1	355	hvAb
1037	"	Mesaverde Gp.	3882	?	12.3	394	hvAb
1033	"	Mesaverde Gp.	3333	?	9.8	314	hvAb
1032	"	Mesaverde Gp.	3323	?	8.9	285	hvAb
1031	"	Mesaverde Gp.	3322	?	9.9	317	hvAb
1030	"	Mesaverde Gp.	3322	?	11.6	371	hvAb
1073	"	Mesaverde Gp.	3881	?	11.5	368	hvAb
1035	"	Mesaverde Gp.	3879	?	12.1	387	hvAb
1038	"	Mesaverde Gp.	3896	?	3.1	99 ?	hvAb
1034	"	Mesaverde Gp.	3315	?	?	?	hvAb
1040	"	Mesaverde Gp.	3976	?	7.5	240 ?	hvAb
1039	"	Mesaverde Gp.	3975	?	5.3	170 ?	hvAb
1041	"	Mesaverde Gp.	3980	?	2.4	77	cuttings

TRW NO.	LOCATION (Sec., Twp., Rge.)	FORMATION NAME	DEPTH TO COAL BED (ft)	BED THICKNESS (ft)	TOTAL GAS (cc/g)	TOTAL GAS (cf/t)	APPARENT RANK OF COAL
Adolph Coors Nichols 1-23 CM 1							
1	23-105-97W	Mesaverde Gp.	2634	2.6	3.54	113	coal cuttings
2	"	Mesaverde Gp.	2675	?	.07	2	sandstone
3	"	Mesaverde Gp.	2676	3.8	2.74	88	hvAb
4	"	Mesaverde Gp.	2715	11.4	4.94	158	hvAb
5	"	Mesaverde Gp.	2715	11.4	5.18	166	hvAb
6	"	Mesaverde Gp.	2732	9	2.80	90	hvAb
7	"	Mesaverde Gp.	2732	9	4.54	145	hvAb
8	"	Mesaverde Gp.	2754	3.6	6.17	197	hvAb
9	"	Mesaverde Gp.	2770	5.6	0.56	18	sandstone
10	"	Mesaverde Gp.	2770	5.6	6.21	199	hvAb
11	"	Mesaverde Gp.	2770	5.6	5.70	182	hvAb

HOLE NO.	LOCATION (Sec., Twp., Rge.)	FORMATION NAME	CORE INTERVAL	BED THICKNESS (ft)	AVERAGE	AVERAGE	NO. OF SAMPLES
U.S. Steel							
16	32-105-89W	Mesaverde Gp.	1570.2-1575.7	5.5	23.9	765.3 5	4
	"	Mesaverde Gp.	1874.5-1859.6	12.1	22.4	716.4	8
	"	Mesaverde Gp.	2251.4-2260	8.6	15.0	480.5	2
17	33-105-89W	Mesaverde Gp.	2269.6-2277.7	8.1	16.3	520.9	2
	"	Mesaverde Gp.	1219.7-1226.4	6.7	13.6	435.9	3
	"	Mesaverde Gp.	1506.9-1518.5	12	19.7	630.4	4
	"	Mesaverde Gp.	1964.9-1971.9	7	7.8	249.5	1
18	32-105-89W	Mesaverde Gp.	2018.5-2032.6	14.1	23.7	759	4
	"	Mesaverde Gp.	2467.2-2475.1	7.9	16.8	537	3
	"	Mesaverde Gp.	2480.9-2488.2	7.5	17.3	553	2
19	32-105-89W	Mesaverde Gp.	2093.6-2107.1	14.6	16.5	527	5
	"	Mesaverde Gp.	2530.1-2539.7	9.6	19.0	628	3
	"	Mesaverde Gp.	2946.6-2554.3	7.7	10.3	329	3

1. Analyses done by TRW Energy Systems Group.
2. Gas contents are low for this rank coal at this depth possibly due to absorption of methane by petroleum based mud.
3. Much gas lost due to fine sample size.
4. Analyses done by U.S. Bureau of Mines.
5. Residual gas not calculated by U.S. Bureau of Mines Direct Method; totals approximate.

Project Description Continued . . .

SITE CHARACTERIZATION

While limited site information is necessary for site nomination, the site of choice will be extensively characterized before any stimulation and production tests are initiated. The following activities will form the basis for site characterization:

- **Coring** – A core will be taken to determine the chemical and physical properties of the coal, and adjacent strata. These data will be useful for input into fracture design and modeling as well as the permeability parameters of the coal.
- **In-situ state of stress** – These data will also be useful for fracturing design and modeling.
- **Hydrology** – If the coal seam is saturated, basic hydrologic drawdown tests, vertical flow profiles, dewatering characteristics and directional flow parameters will be acquired. These parameters will be useful in overall reservoir characterization because of the need to reduce the hydrostatic head to induce gas production.
- **Dewatering** – If dewatering is necessary, an optimized dewatering system will be employed based on GRI's dewatering system study while utilizing the basic hydrologic drawdown parameters.
- **Completion** – If any deviations from standard oil field and/or water well practice are necessary, information from GRI casing and cementing procedures will be utilized to optimize completions.
- **Baseline Production** – Dewatering, baseline production characteristics of the well will be determined for input into the reservoir model and as a reference point prior to stimulation.
- **Environmental** – The required baseline environmental parameters will be measured. Sufficient groundwater quality data will be collected to anticipate treatment needs, if any, for product water disposal.

STIMULATION AND PRODUCTION TESTING

Currently a nine production well and eight observation well array is envisioned for the field test. At the beginning of the testing only 2 to 3 wells will have been drilled and the spacing for further wells will be determined after testing has begun. The well pattern in Figure 2 is an example of what the final well pattern might look like.

The crucial part of the deep seam test is well stimulation quantification. It is premature to specify an exact variation of the types of fracturing fluids or fracturing techniques to be tested but the following is shown for an example:

(1) Baseline – state of the art;

(2) Other possibilities;

- multi-stage
- advanced proppants
- improved fluids

The following is an example of a sequence of operations that might be followed:

- Preliminary Operations Sequence
 - Drill, test and frac two wells using a conventional fracturing technique
 - Drill, test and frac two wells using a new or modified technique

- Drill, test and frac two wells using another new or modified technique
- Drill, test and frac two or three wells using improved fluids
- Compare effectiveness and define additional tests
- Update frac designs
- Drill, test, and frac remaining wells using refined techniques or, possibly, a horizontal hole.

It is intended to provide sufficient data acquisition capability including observation wells and time between fracturing tests to allow the results of one test to impact the designs of subsequent tests. In addition, workshops will be conducted during the course of this investigation to allow for dissemination of results as well as to acquire inputs related to new stimulation techniques which might be utilized in this program.


DISSEMINATION OF RESULTS

GRI expects that at the completion of this project the following products will result:

- Commercially proven Deep Coal Stimulation Techniques;
- Improved Completion and Production Technology;
- Practical Resource Recovery Estimating Procedures;
- A Strong Basis for Economic Projections;
- An Impact on Near-Term Gas Supply.

The experimental results will be incorporated into a data base and procedural handbooks for utilization of technologies by industry.

Figure 2.
Preliminary Site Layout

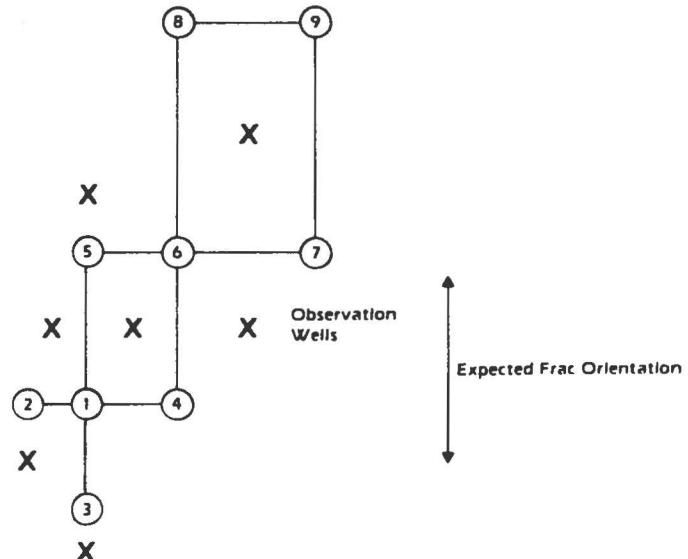


Mesaverde Coals in the Piceance Basin, Colorado

by Carol M. Tremain

COLORADO GEOLOGICAL SURVEY
DEPARTMENT OF NATURAL RESOURCES
JOHN W. ROLD, DIRECTOR

OPEN-FILE 82-1
PLATE 1
1982




Mesaverde Net Coal Thickness, Piceance Basin, Colorado

by Carol M. Tremain

OPEN-FILE 82-1
PLATE 2
1982

COLORADO GEOLOGICAL SURVEY
DEPARTMENT OF NATURAL RESOURCES
JOHN W. ROLD, DIRECTOR



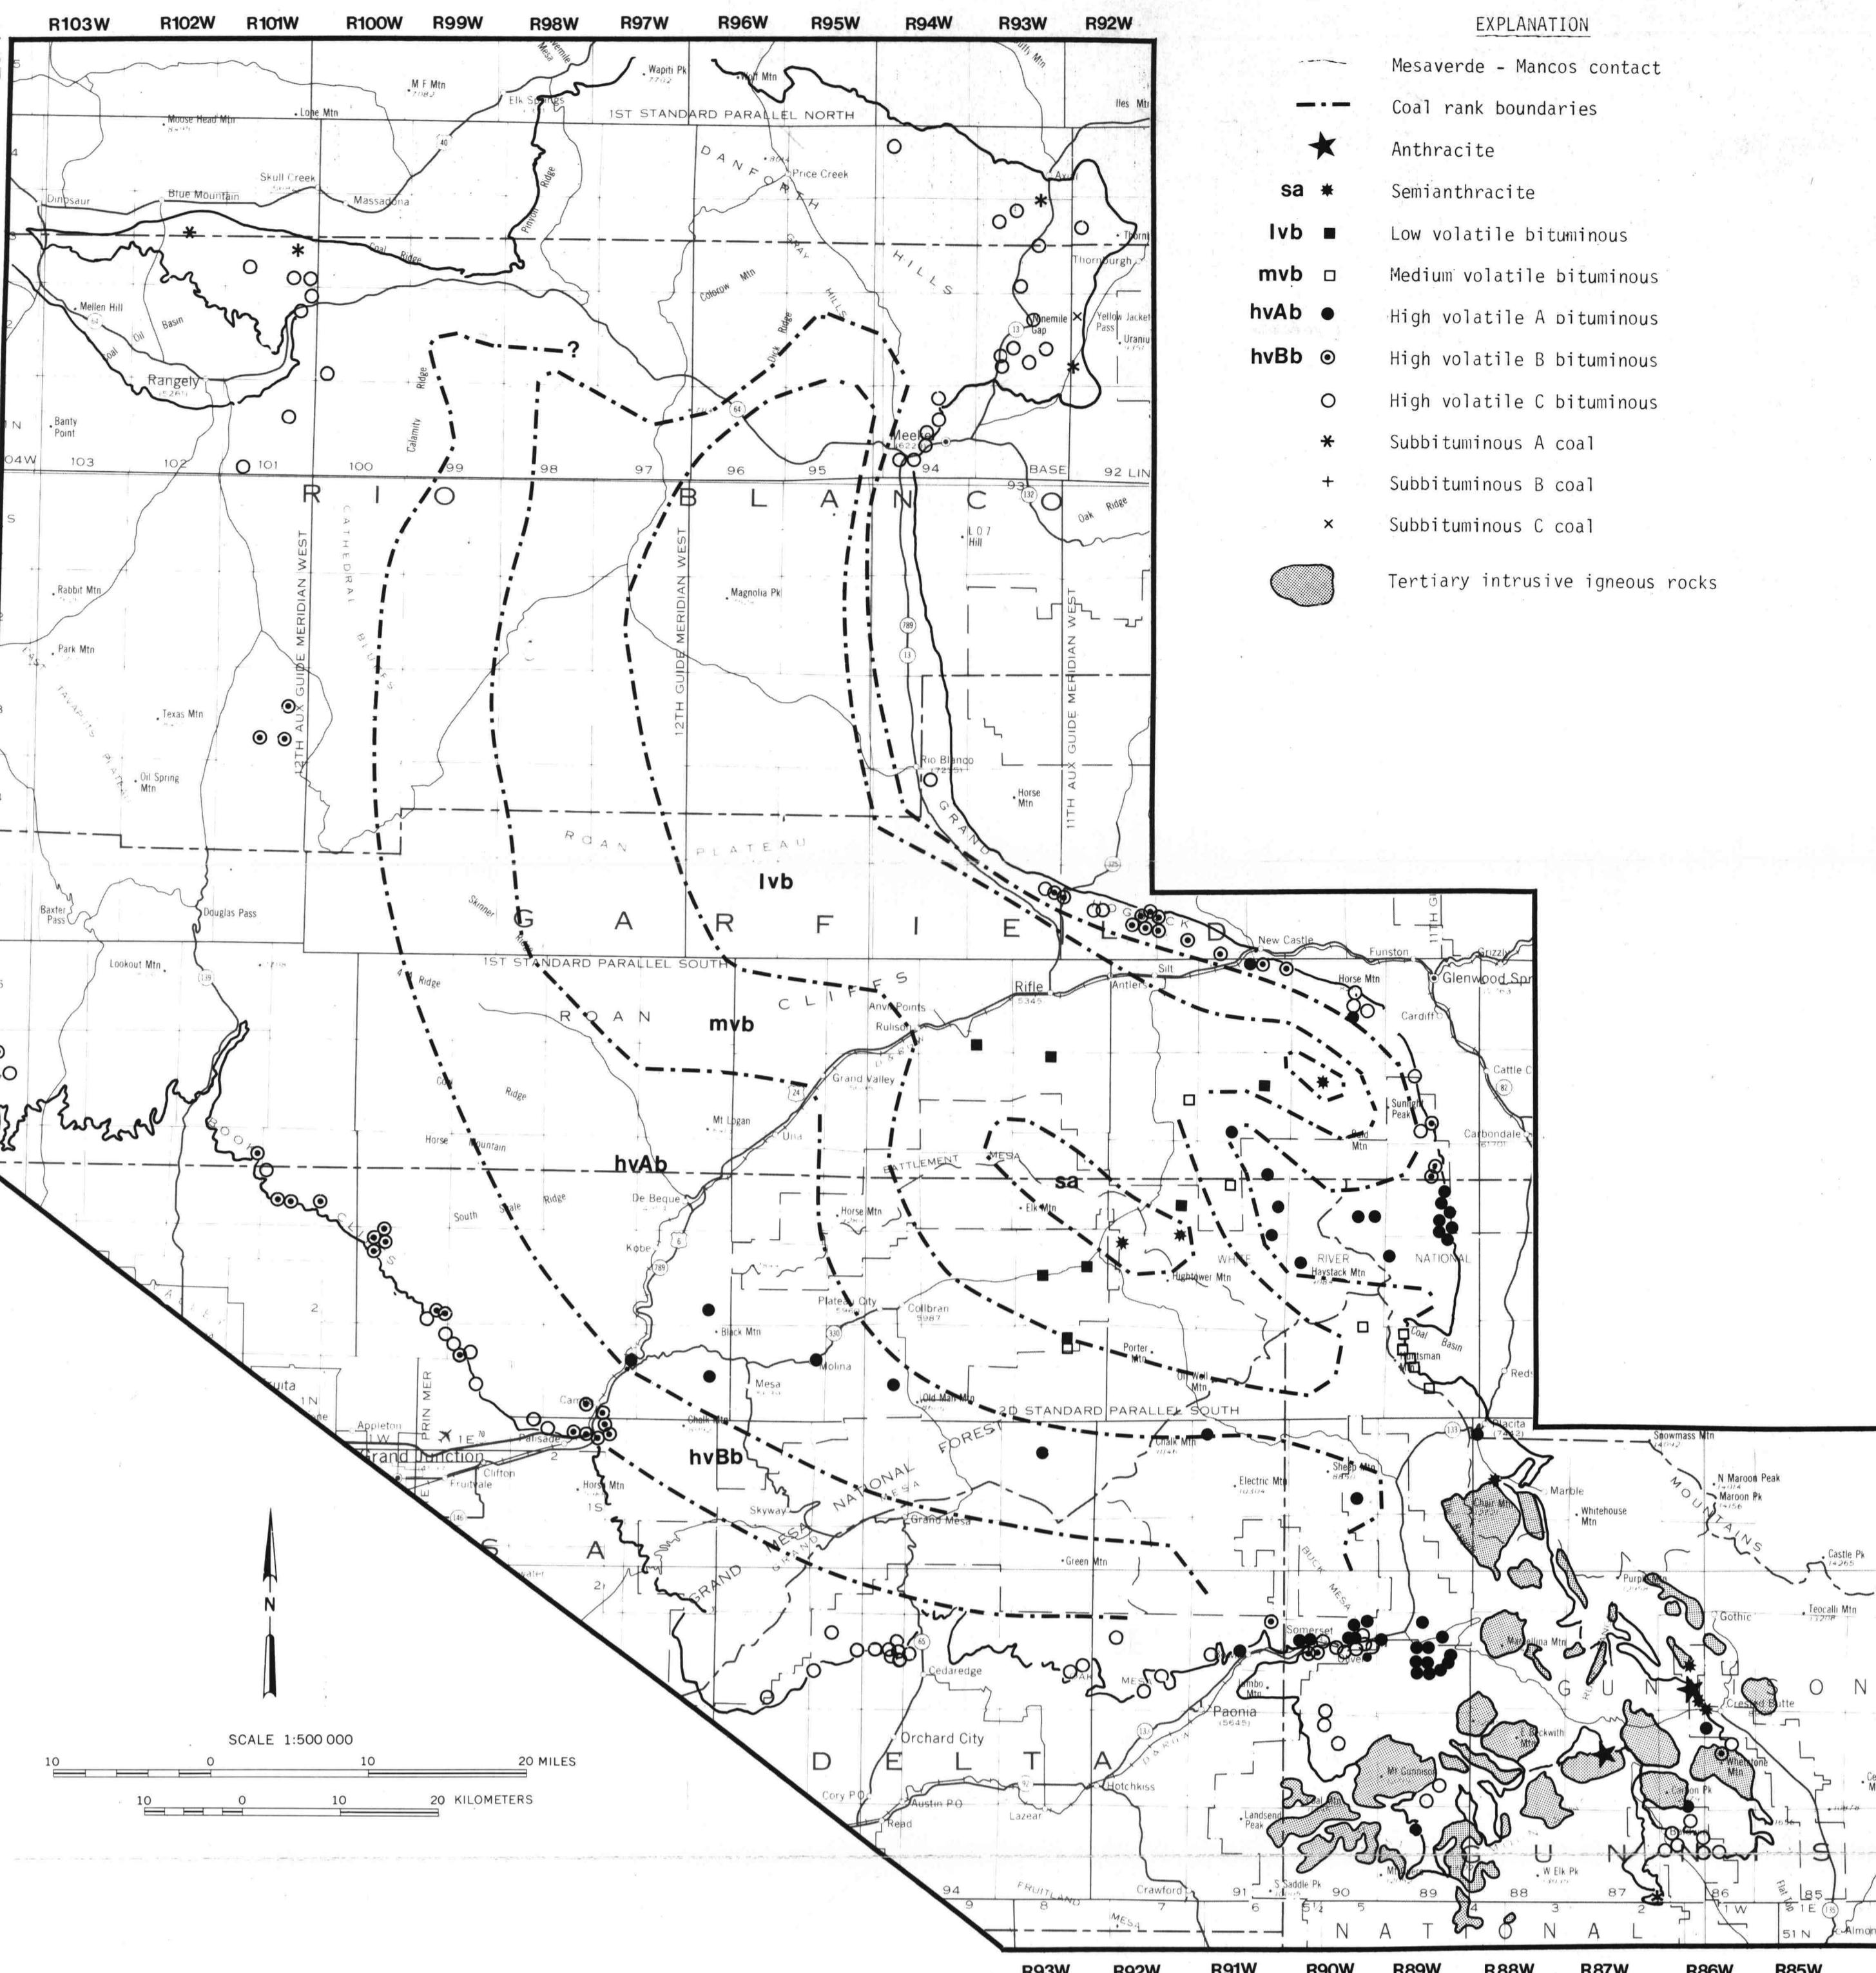


PLATE 3
COAL RANK MAP OF THE PICEANCE BASIN

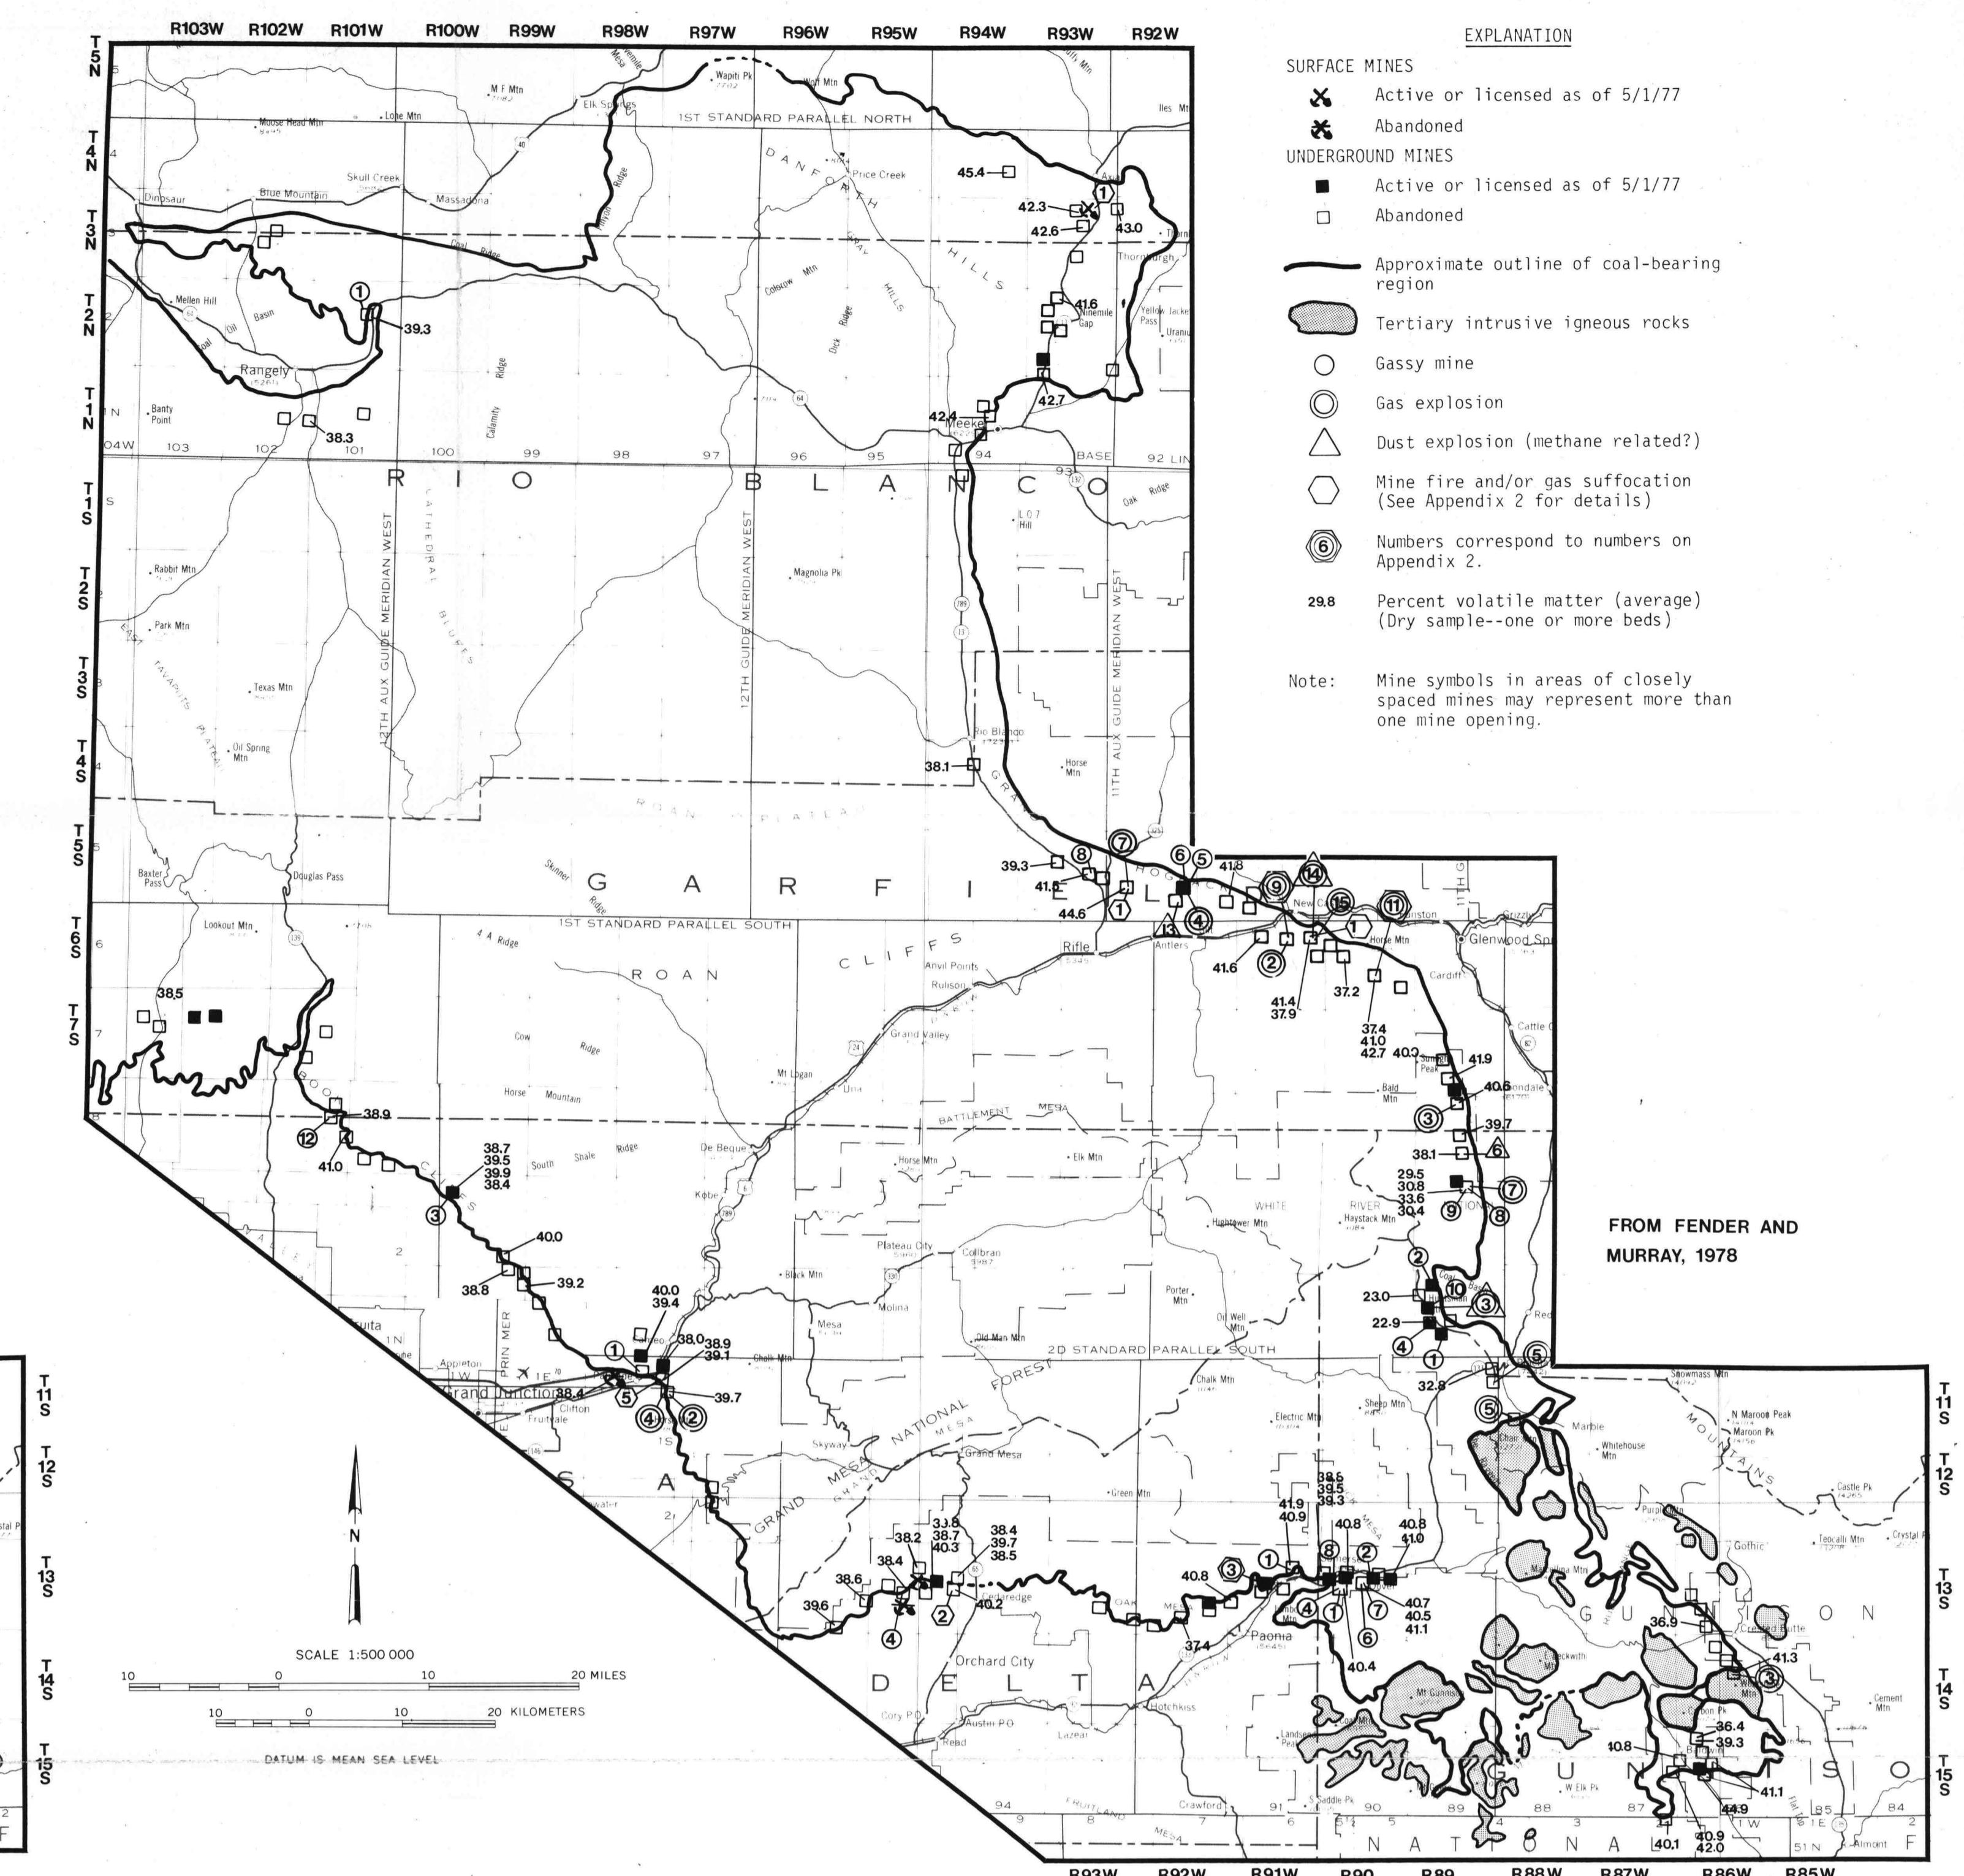


PLATE 5
METHANE IN PICEANCE BASIN COAL MINES

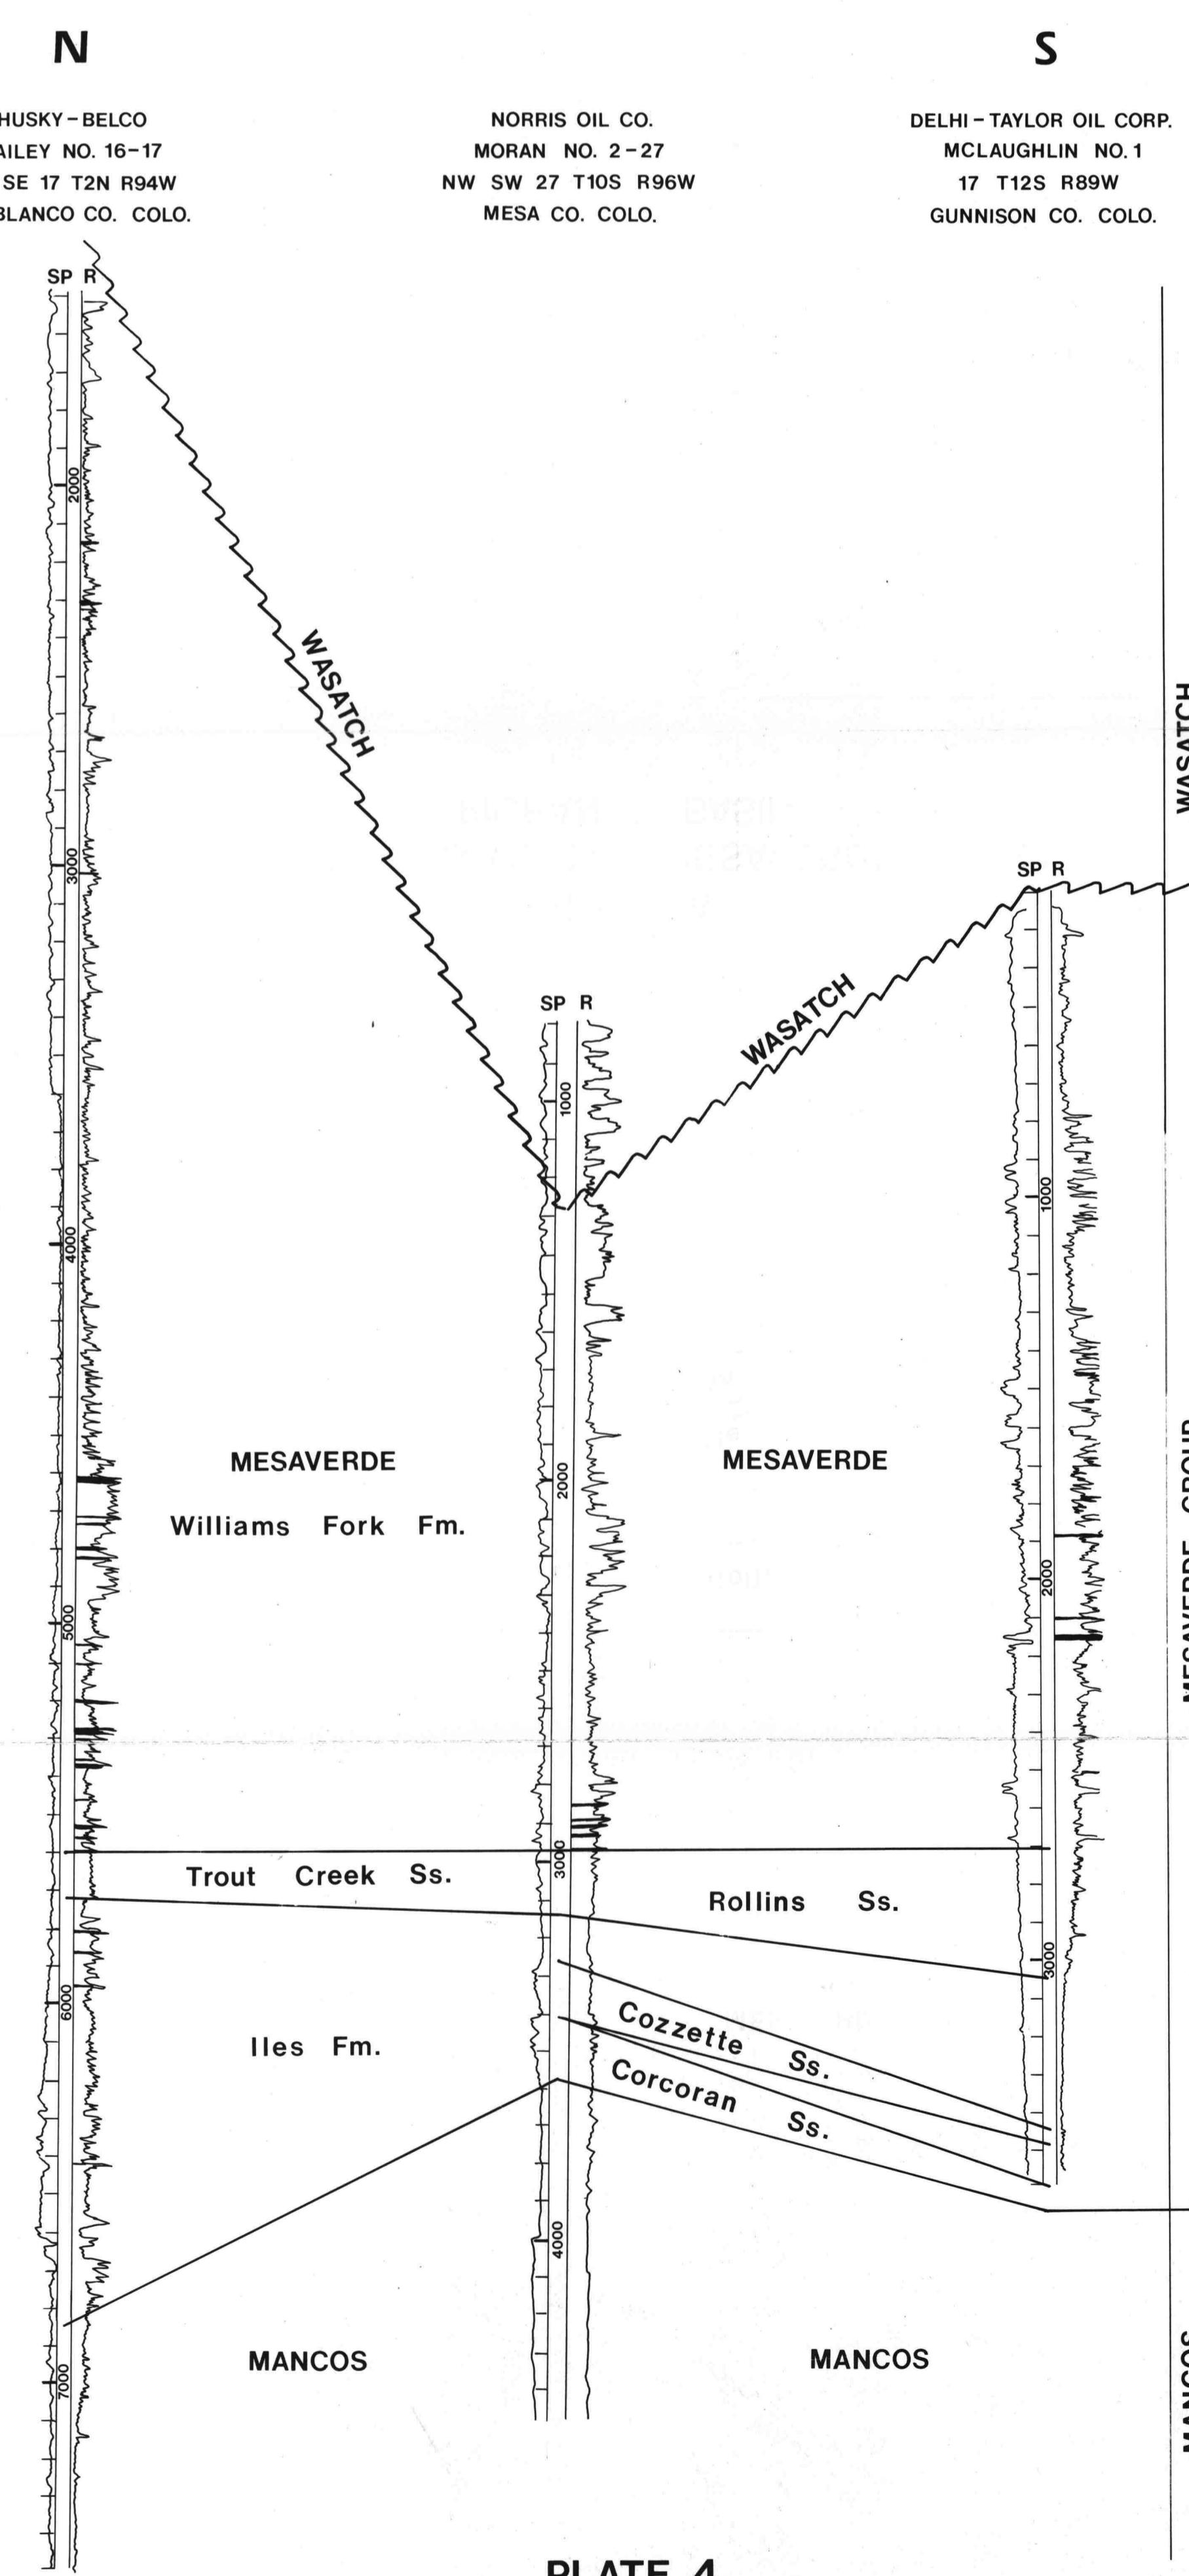


PLATE 4
THREE TYPE LOGS OF THE MESAVERDE FORMATION,
PIECEANCE BASIN